

MATERIAL

Insulator: Thermoplastic UL94V-0

Contact: Copper Alloy

Shell: Steel

Boardlock: Copper Alloy

ELECTRICAL

Current Rating: 0.5 Amp.





Voltage Rating: 250 Vac Rms.

Operating Temperature: -55°C to 85°C

ORDER

205V-68S-1-N-S-T-□-R

Series: 205V
Pins: 68S
Housing Color: 1: Black
Shell Plated: N: Nickel
RoHS
Special code
Thread Type: T: M2.0
Contact Plated: S: Selective Gold, S1: 5u" Selective Gold

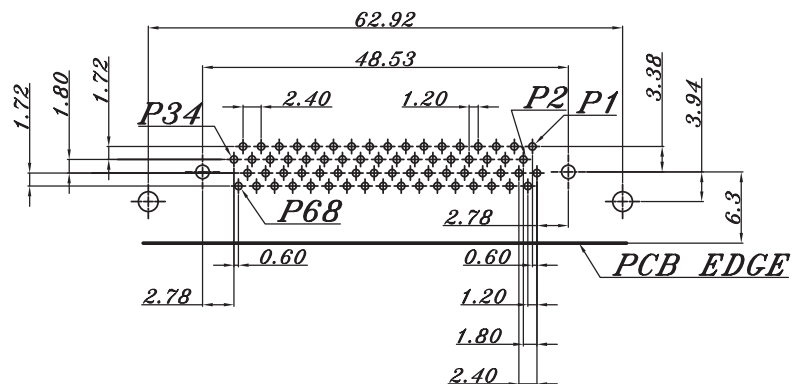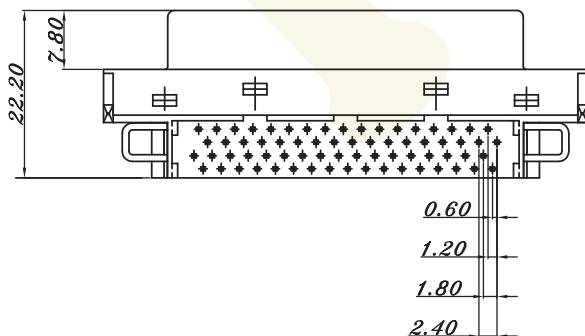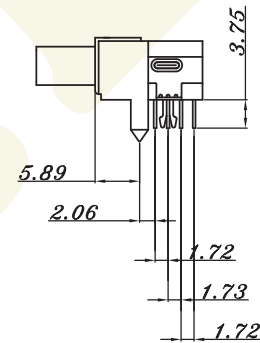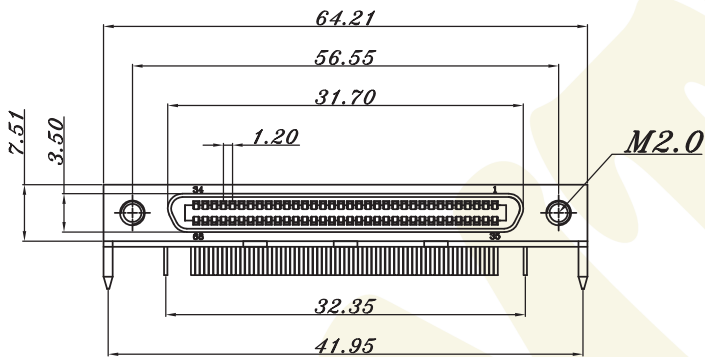

P.C.B LAYOUT
TO SUGGEST

205V