


Pitch:1.0mm Disconnectable Crimp Type For PCB&Wire



MATERIAL
 Insulator:Thermoplastics
 UL94V-0 or UL94V-2
 Contact:Copper Alloy
 Contact Plated:Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating:50V AC,DC
 Current Rating:1A AC,DC
 Withstanding Voltage:500V AC/minute
 Contact Resistance:20mΩ Max.
 Insulation Resistance:100MΩ Min.
 Temperature Range:-25°C~+85°C

ORDER INFORMATION

Series No.	Pins	Mounting Type	Contact Plated	Special code	RoHS
		S	T		R


S: Straight Type
 R: Right Angle

T: Tin

*Special Options Contact Our Sales Team.

507JW


Wafer Straight Type

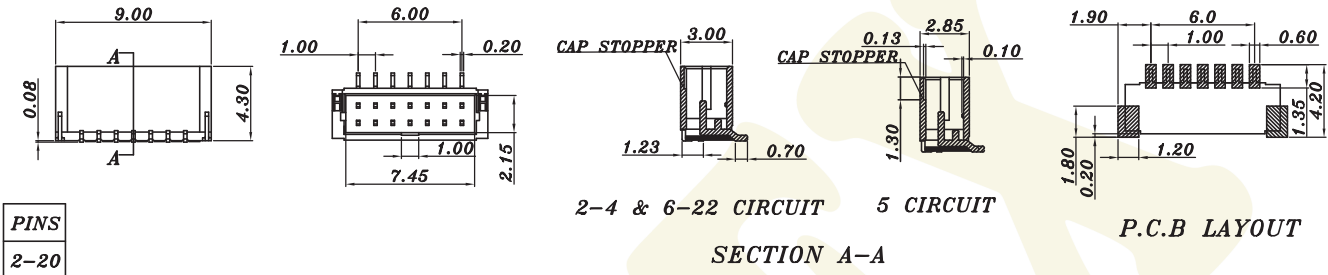

PINS
2-20

507JW

Wafer Right Angle

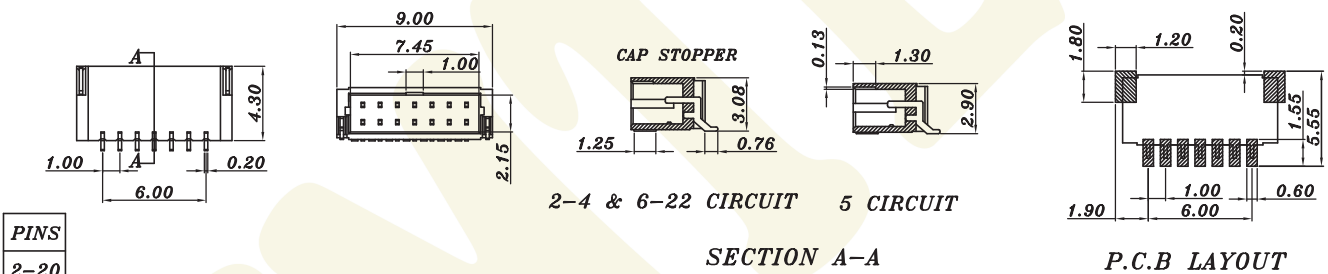


PINS
2-20

507

507JH


Housing

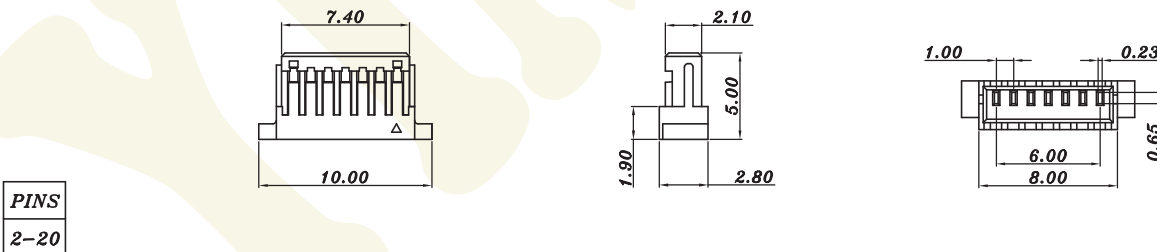

PINS
2-20

507JT

Terminal

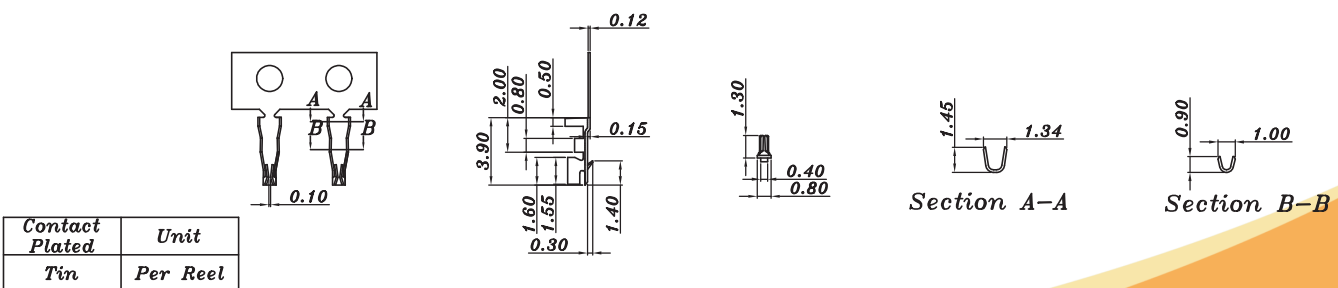

Contact Plated	Unit
Tin	Per Reel