


Pitch:1.25mm Disconnectable Crimp Type For PCB&Wire



MATERIAL
 Insulator:Thermoplastics
 UL94V-0 or UL94V-2
 Contact:Copper Alloy
 Contact Plated:Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating:150V AC,DC
 Current Rating:1A AC,DC
 Withstanding Voltage:500V AC/minute
 Contact Resistance:30mΩ Max.
 Insulation Resistance:500MΩ Min.
 Temperature Range:-25°C~+85°C


ORDER INFORMATION

Series No.	Pins	Mounting Type	Contact Plated	Special code	RoHS
		S	T		R
		S:SMD S/T R:SMD R/A	T:Tin		

*Special Options Contact Our Sales Team.


525

Wafer SMD Straight Type

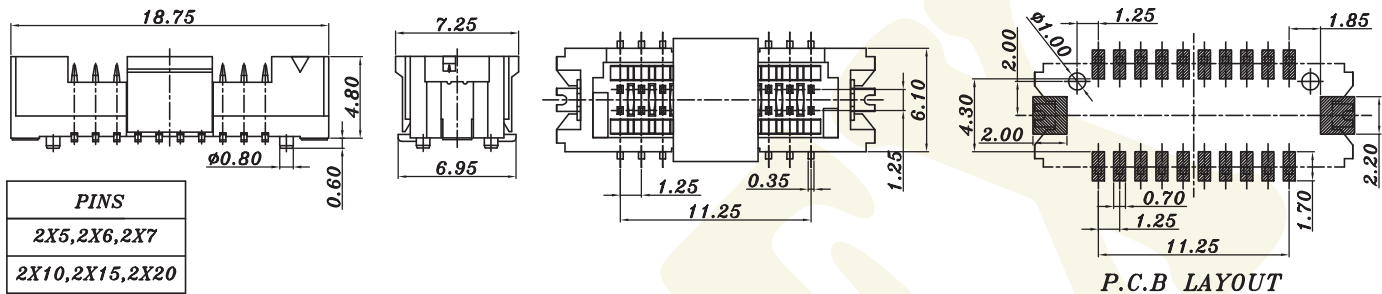


525

Wafer SMD Straight Type

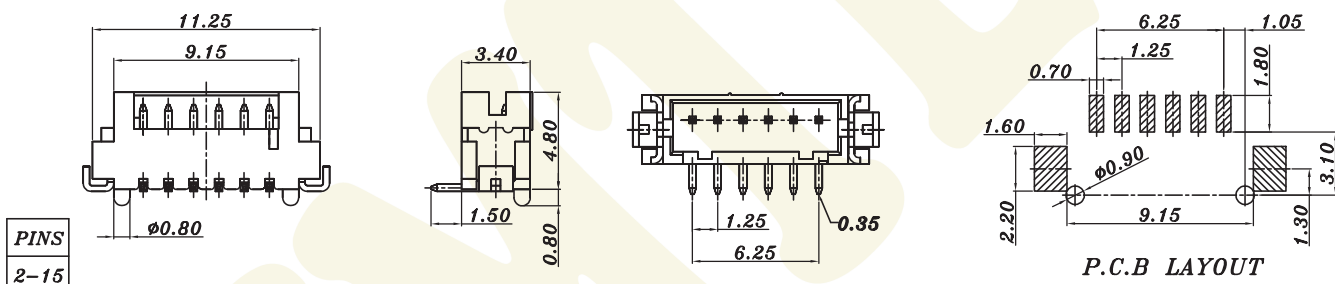

525

Wafer SMD Right Angle

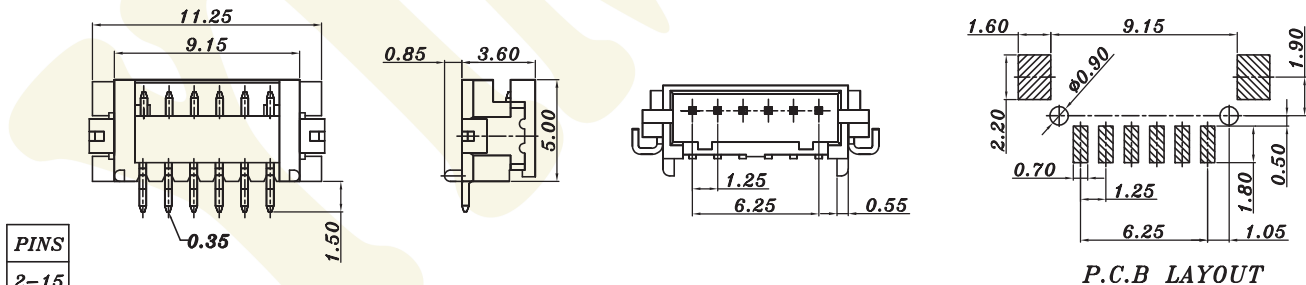

525H/525T

Housing/Terminal

