

Pitch=2.54mm CENTRONIC IDC TYPE MALE

ORDER



MATERIAL

Insulator: Thermoplastic UL94V-0
Contact: Copper Alloy

ELECTRICAL

Current Rating: 1 Amp.
Voltage Rating: 500 Vac Rms.
Operating Temperature: -40°C to 105°C

Series

203-36P-1-A-S-R

Pins

36P

50P

(Plug Only)

Housing Color

1: Black

3: Blue





RoHS

Contact Plated

S: Selective Gold

A: All Plastic

B: Metal

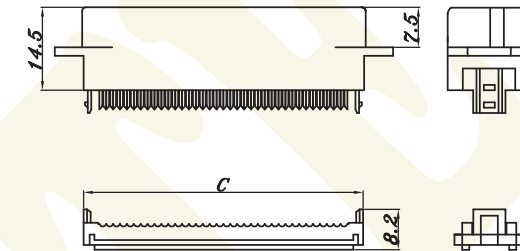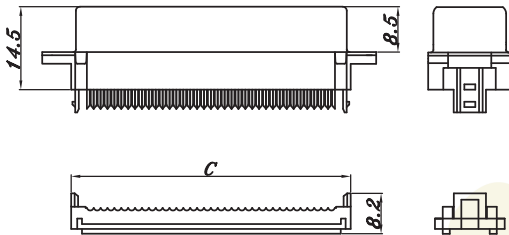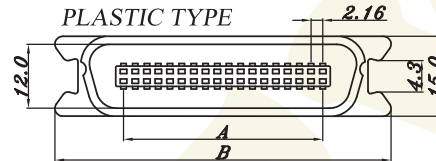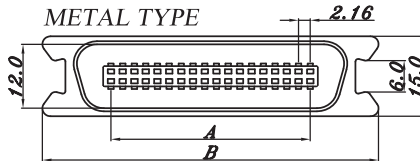


POSITION	36P	50P
A	36.72	51.84
B	61.6	76.7
C	51.0	69.0

203

Pitch=2.54mm CENTRONIC IDC TYPE FEMALE

ORDER



MATERIAL

Insulator: Thermoplastic UL94V-0
Contact: Copper Alloy

ELECTRICAL

Current Rating: 1 Amp.
Voltage Rating: 500 Vac Rms.
Operating Temperature: -40°C to 105°C

Series

204-50S-1-A-S-A-R

Pins

36S

50S

(Socket Only)

Housing Color

1: Black

3: Blue

RoHS

Thread Type

A: Through Hole

B: Thread Insert





<#40 UNC>

Contact Plated

S: Selective Gold

A: All Plastic

B: Metal

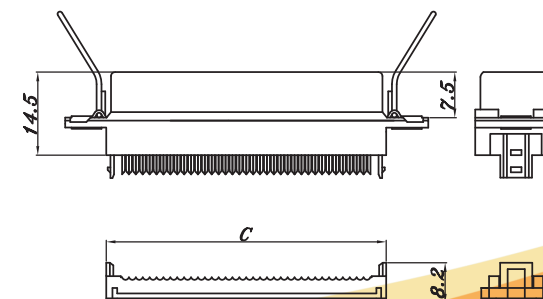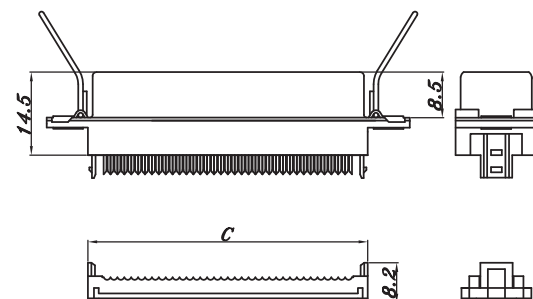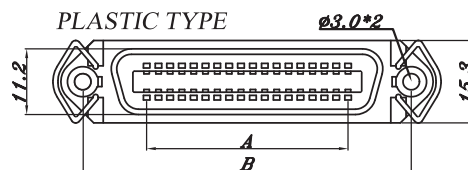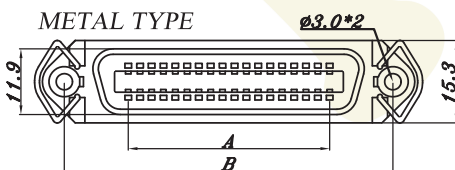

POSITION	36S	50S
A	36.72	51.84
B	59.7	75.0
C	51.0	69.0

204