



MATERIAL
 Insulator: Thermoplastic UL94V-0
 Contact: Copper Alloy

ELECTRICAL
 Current Rating: 1 Amp.
 Voltage Rating: 500 Vac Rms.
 Operating Temperature: -55°C to 85°C




ORDER

205C-26S-1-N-S-N-N-R


Series Pins
 26S
 50S
 68S
 100S
 Housing Color
 1: Black
 Shell Plated
 N: Nickel

RoHS
 Accessories
 N: S Type
 W: L Type
 Thread Type
 Rivet W/Boardlock
 N: 2#56
 M: 4#40
 P: M2.6
 Contact Plated
 S: Selective Gold
 S1: 5u" Selective Gold

205C

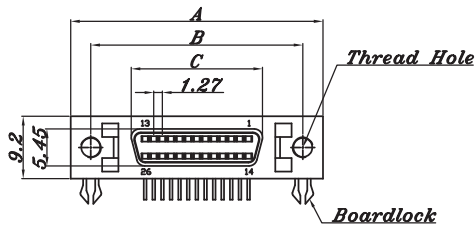


L Type



S Type

NO. OF CONTACTS	A	B	C
26	37.19	31.26	19.45
50	52.43	46.49	34.70
68	63.86	57.92	46.13
100	84.18	78.23	66.45

Pitch=1.27mm SCSI VERTICAL PIN TYPE



MATERIAL
 Insulator: Thermoplastic UL94V-0
 Contact: Copper Alloy

ELECTRICAL
 Current Rating: 1 Amp.
 Voltage Rating: 500 Vac Rms.
 Operating Temperature: -55°C to 85°C


ORDER

205E-26S-1-N-S-N-N-R


Series Pins
 26S
 36S
 50S
 68S
 Housing Color
 1: Black
 Shell Plating
 N: Nickel

RoHS
 Accessories
 N: S Type
 W: L Type
 Thread Type
 Rivet W/Boardlock
 N: 2#56
 M: 4#40
 P: M2.6
 Contact Plated
 S: Selective Gold
 S1: 5u" Selective Gold



205E

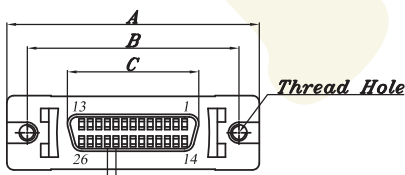

L Type



S Type



NO. OF CONTACTS	A	B	C
26	37.20	31.20	19.46
36	43.50	37.60	25.80
50	52.60	46.80	34.70
68	64.00	57.90	46.20