

Pitch=1.27mm SCSI R/A RIBBON TYPE

MATERIAL

Insulator: Thermoplastic UL94V-0
Contact: Copper Alloy

ELECTRICAL

Current Rating: 1 Amp.
Voltage Rating: 500 Vac Rms.
Operating Temperature: -55°C to 85°C

ORDER

Series 205-26S-1-N-S-N-N-R

Pins
14S 20S
26S 36S
50S 68S
100S

Housing Color
1: Black




Shell Plated
N: Nickel

RoHS


Accessories
N: S Type
W: L Type

Thread Type
Rivet W/Boardlock
N: 2#56
M: 4#40
P: M2.6

Contact Plated
S: Selective Gold
S1: 5u" Selective Gold

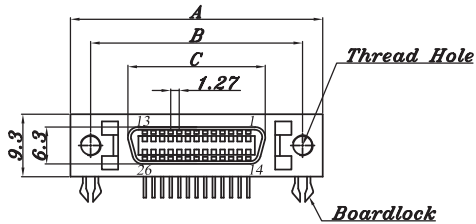

L Type



S Type

NO.OF CONTACTS	A	B	C
14	29.57	23.64	12.63
20	33.40	27.40	16.44
26	37.19	31.26	20.25
36	43.54	37.61	26.60
50	52.50	46.50	35.49
68	64.00	57.92	46.92
100	84.18	78.23	67.10

Pitch=1.27mm SCSI VERTICAL RIBBON TYPE

MATERIAL

Insulator: Thermoplastic UL94V-0
Contact: Copper Alloy

ELECTRICAL

Current Rating: 1 Amp.
Voltage Rating: 500 Vac Rms.
Operating Temperature: -55°C to 85°C

ORDER

Series 205S-26S-1-N-S-N-N-R

Pins
26S 36S
50S 68S

Housing Color
1: Black




Shell Plated
N: Nickel

RoHS



Accessories
N: S Type
W: L Type

Thread Type
Rivet W/Boardlock
N: 2#56
M: 4#40
P: M2.6

Contact Plated
S: Selective Gold
S1: 5u" Selective Gold

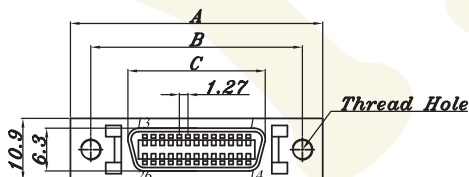

L Type



S Type

NO.OF CONTACTS	A	B	C
26	37.20	31.20	20.25
36	43.50	37.60	26.60
50	52.60	46.80	35.40
68	64.00	57.90	46.90