


Pitch:2.0mm Disconnectable Crimp Type For PCB&Wire

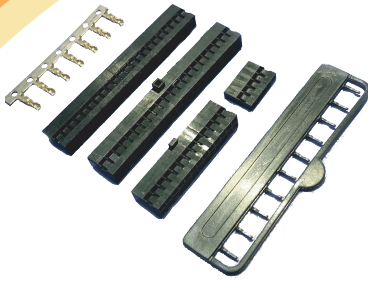

MATERIAL
 Insulator:Thermoplastics
 UL94V-0 or UL94V-2
 Contact:Copper Alloy
 Contact Plated:Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating:250V AC,DC
 Current Rating:1A AC,DC
 Withstanding Voltage:1500V AC/minute
 Contact Resistance:10mΩ Max.
 Insulation Resistance:500MΩ Min.
 Temperature Range:-25°C~+85°C





ORDER INFORMATION

Series No.	Pins	Bump	Contact Plated	Special code	RoHS
		N	T		R
		W:With N:None	T:Tin		

*Special Options Contact Our Sales Team.

504DH/504DT

Housing/Terminal

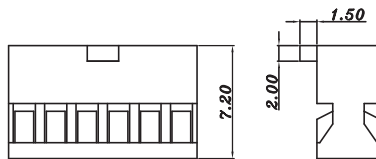


PINS
1X2-1X40
2X2-2X25

Contact Plated	Unit
Gold Flash	Per Reel

Pitch:2.54mm Disconnectable Crimp Type For PCB&Wire

504

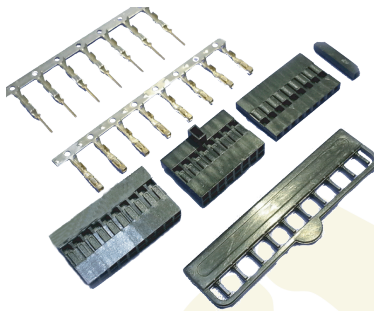

MATERIAL
 Insulator:Thermoplastics
 UL94V-0 or UL94V-2
 Contact:Copper Alloy
 Contact Plated:Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating:250V AC,DC
 Current Rating:3A AC,DC
 Withstanding Voltage:1000V AC/minute
 Contact Resistance:10mΩ Max.
 Insulation Resistance:500MΩ Min.
 Temperature Range:-25°C~+85°C



ORDER INFORMATION

Series No.	Pins	Bump	Contact Plated	Special code	RoHS
		N	S		R
		W:With N:None	S:Selective Gold T:Tin		

*Special Options Contact Our Sales Team.

520DH





Housing

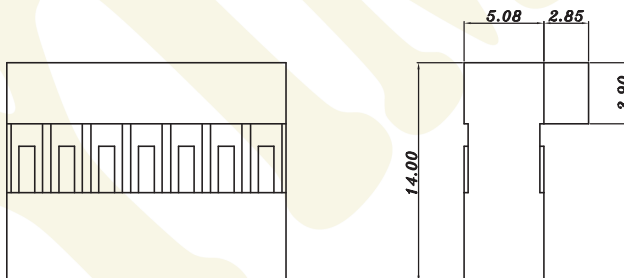


PINS
1X1-1X40
2X2-2X40

520DT

Terminal Male/Female

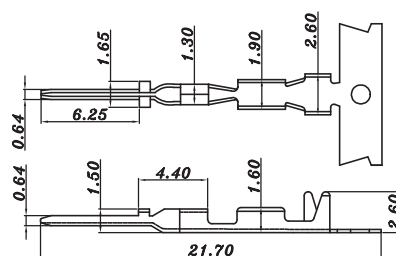

Section A-A



Section B-B

Contact Plated	Unit
Gold Flash	Per Reel