


MATERIAL
Insulator: Thermoplastics
UL94V-0 or UL94V-2
Contact: Copper Alloy
Contact Plated: Tin or Gold over Nickel


SPECIFICATIONS
Voltage Rating:250V AC,DC
Current Rating:1A AC,DC
Withstanding Voltage:1000V AC/minute
Contact Resistance:10mΩ Max.
Insulation Resistance:1000MΩ Min.
Temperature Range:-25°C ~+85°C

Series No.	Pins	Mounting Type	Contact Plated	SMD Type	Special code	RoHS
		S	T			R
		S: Straight Type R: Right Angle	T: Tin	V: SMD S/T R: SMD R/A		


**Special Options Contact Our Sales Team.*

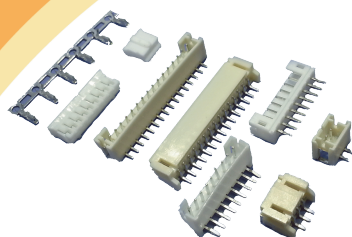


Wafer Straight Type/Right Angle

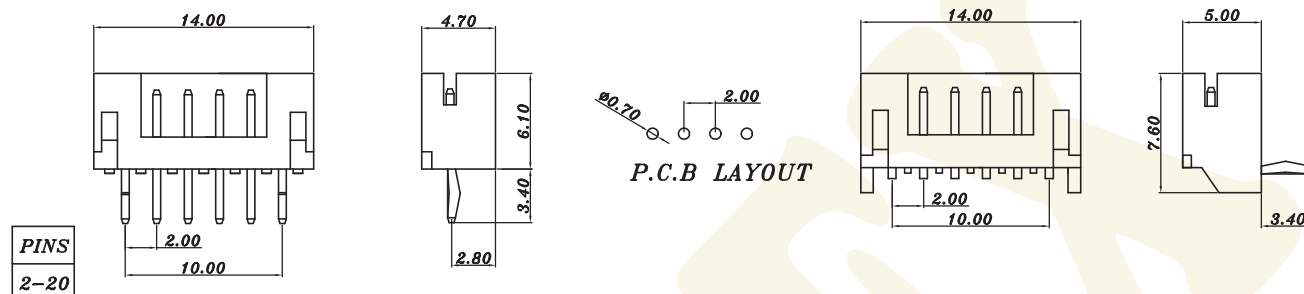

Wafer SMD Straight Type

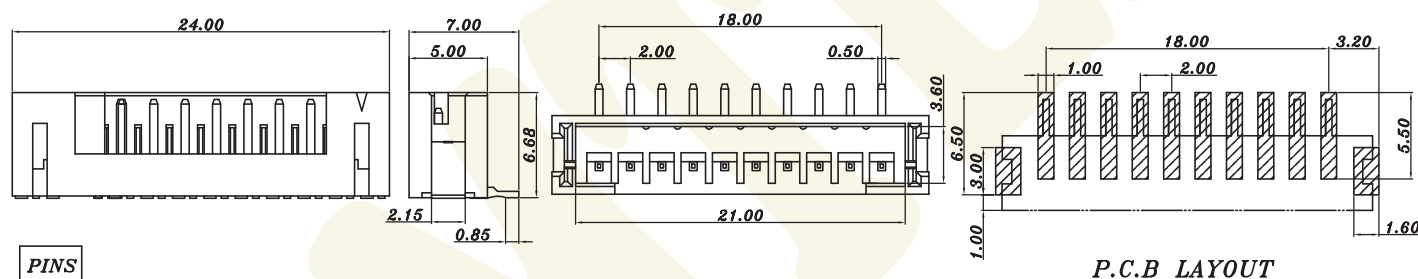

Wafer SMD Right Angle

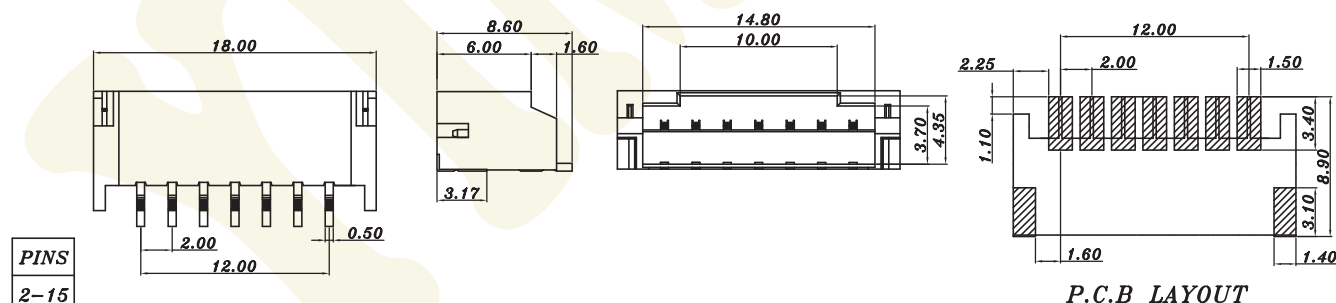

Housing/Terminal

