


Pitch:2.0mm Disconnectable Crimp Type For PCB&Wire

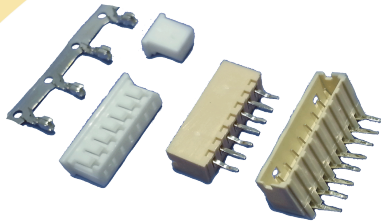

MATERIAL
 Insulator: Thermoplastics
 UL94V-0 or UL94V-2
 Contact: Copper Alloy
 Contact Plated: Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating: 125V AC, DC
 Current Rating: 2A AC, DC
 Withstanding Voltage: 800V AC/minute
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Temperature Range: -25°C ~ +85°C

ORDER INFORMATION


Series No.	Pins	Mounting Type	Contact Plated	Special code	RoHS
		S	T		R

S: Straight Type
 R: Right Angle
 T: Tin

*Special Options Contact Our Sales Team.


508MW

Wafer Straight Type

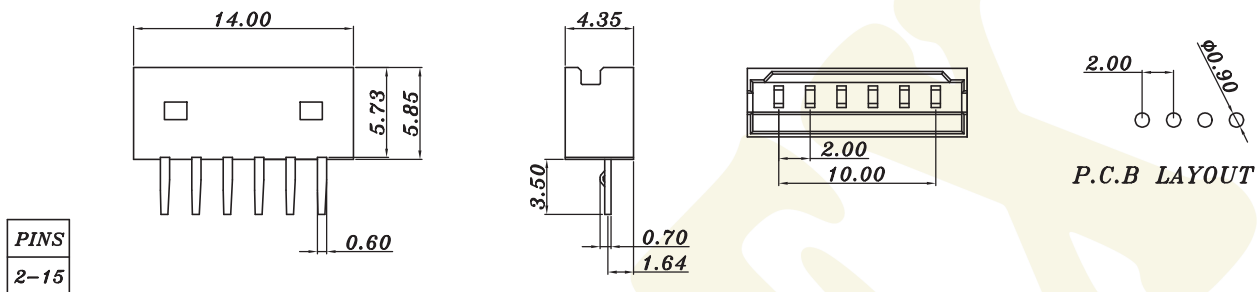


508MW

Wafer Right Angle

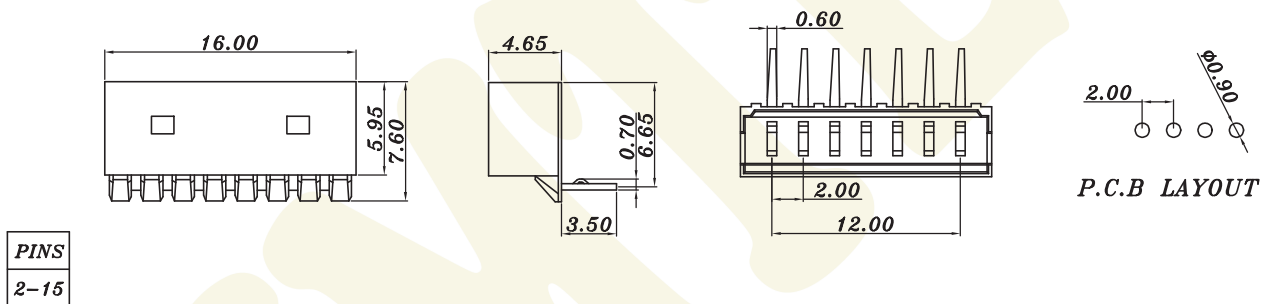


508MH

Housing

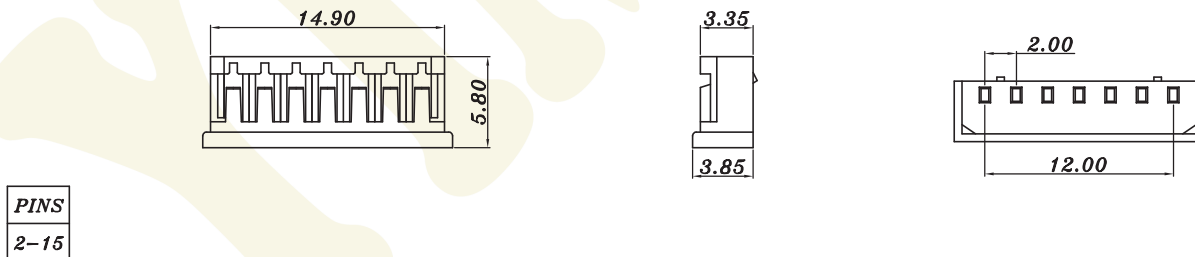

508MT

Terminal

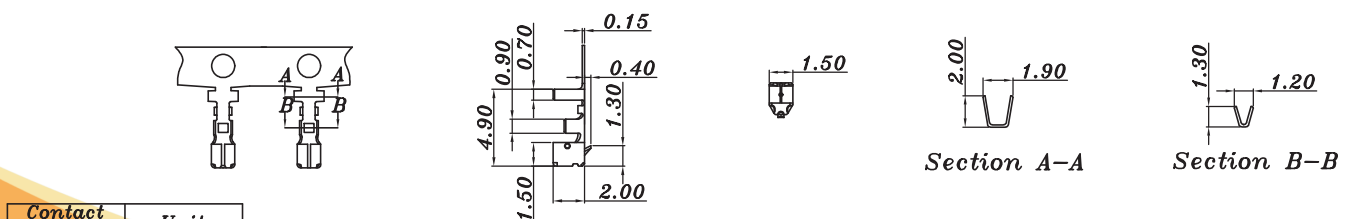

Contact Plated	Unit
Tin	Per Reel