


Pitch:2.0mm Disconnectable Crimp Type For PCB&Wire

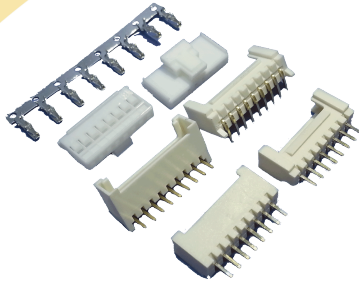

MATERIAL
 Insulator:Thermoplastics
 UL94V-0 or UL94V-2
 Contact:Copper Alloy
 Contact Plated:Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating:250V AC,DC
 Current Rating:3A AC,DC
 Withstanding Voltage:1000V AC/minute
 Contact Resistance:30mΩ Max.
 Insulation Resistance:1000MΩ Min.
 Temperature Range:-25°C~+85°C

ORDER INFORMATION





Series No.	Pins	Mounting Type	Contact Plated	Special code	RoHS
		S	T		R
		S: Straight Type R: Right Angle	T: Tin		

*Special Options Contact Our Sales Team.

516W

Wafer Straight Type

PINS
2-16







516W

Wafer Right Angle

516




PINS
2-16



516H

Housing

PINS
2-16



516T

Terminal

Contact Plated	Unit
Tin	Per Reel

