


Pitch:2.54mm Disconnectable Crimp Type For PCB&Wire

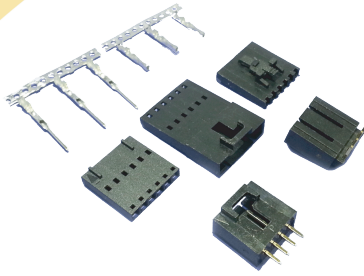

MATERIAL
 Insulator:Thermoplastics
 UL94V-0 or UL94V-2
 Contact:Copper Alloy
 Contact Plated:Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating:250V AC,DC
 Current Rating:1A AC,DC
 Withstanding Voltage:1000V AC/minute
 Contact Resistance:10mΩ Max.
 Insulation Resistance:500MΩ Min.
 Temperature Range:-25°C~+85°C


ORDER INFORMATION

Series No.	Pins	Mounting Type	Contact Plated	Special code	RoHS
		S	T		R
		S: Straight Type R: Right Angle	T: Tin		

*Special Options Contact Our Sales Team.


522CW

Wafer Straight Type/Right Angle

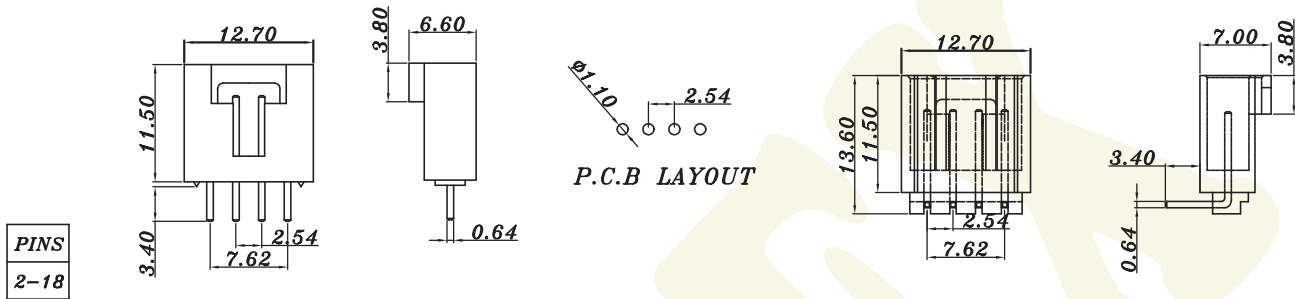


522CH

Housing

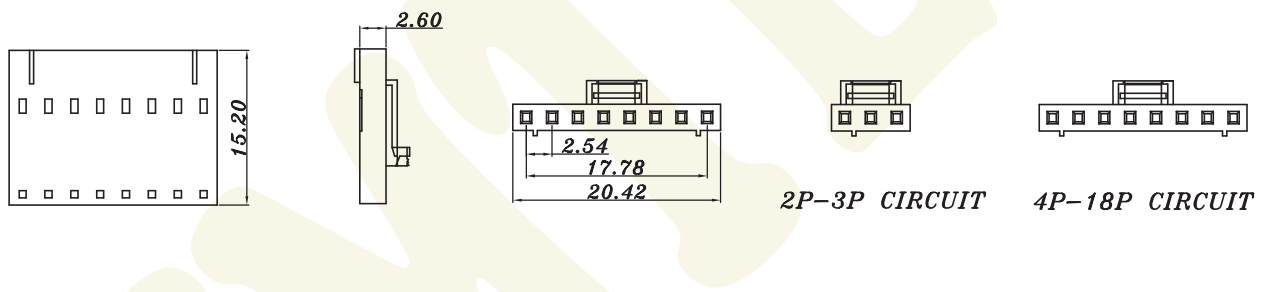


522CH

Housing

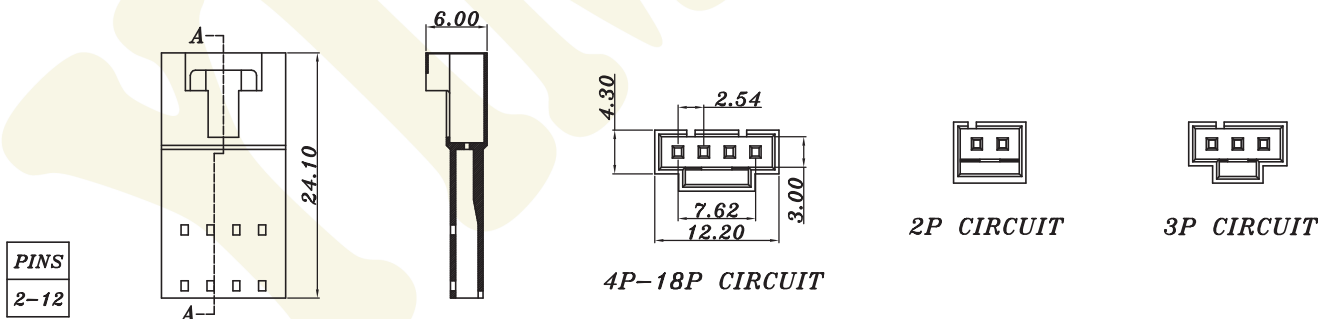

522CST/522CT

Terminal

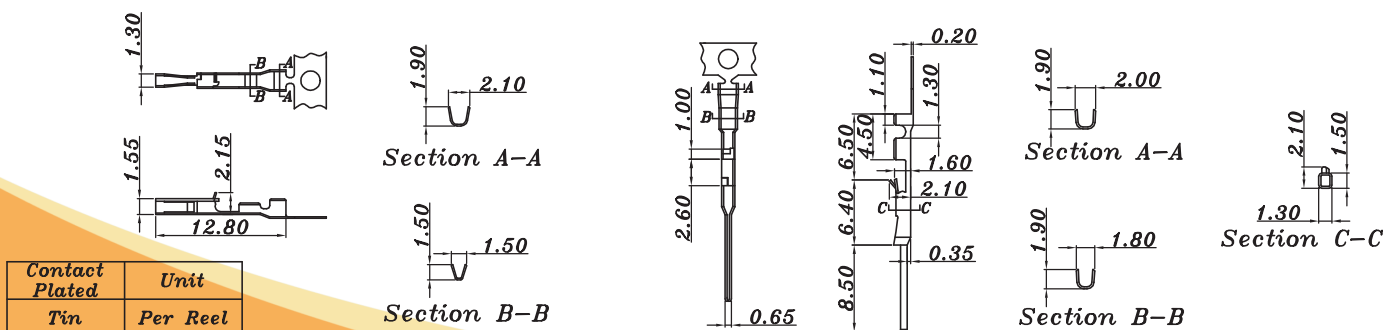

Contact Plated	Unit
Tin	Per Reel