

ULTRA ATA BUS IDC CONNECTOR



MATERIAL

Insulator: Thermoplastic UL94V-0

Contact: Copper Alloy

ELECTRICAL

Current Rating: 1 Amp.

Voltage Rating: 500 Vac Rms.

Operating Temperature: -40°C to 105°C




ORDER

202-40S-1-B-S-N-W-R

Series — Pins — Housing Color — Contact Material — Strain Relief — Polarization — Contact Plated — RoHS

40S (Socket Only) — 1: Black — B: Phosphor Bronze — W: With S/R — N: None — A: Standard — T: Tin — G: Gold Flash — S: Selective Gold

N: Without S/R

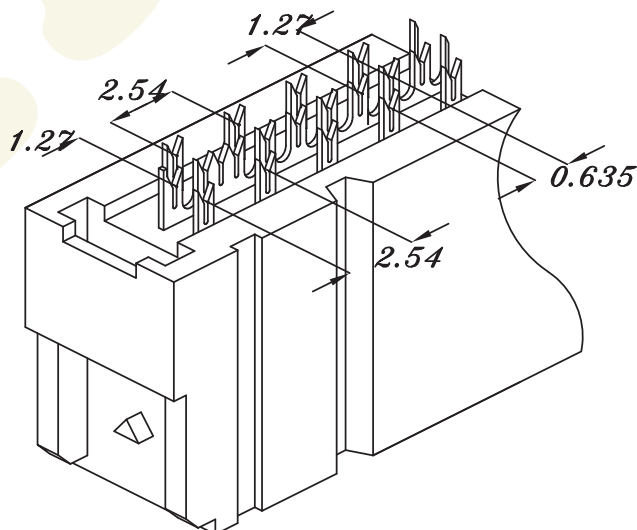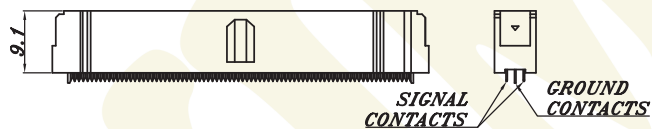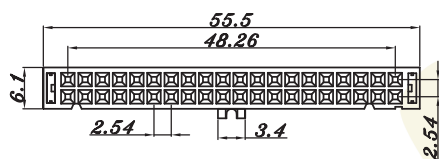

(WIRE ACCOMMODATION: 30 AWG SOLID OR STRANDED 0.635mm(0.025") 80 CONDUCTORS FLAT RIBBON CABLE)