

Pitch:2.5mm Disconnectable Crimp Type For PCB&Wire



MATERIAL
 Insulator:Thermoplastics
 UL94V-0 or UL94V-2
 Contact:Copper Alloy
 Contact Plated:Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating:250V AC,DC
 Current Rating:3A AC,DC
 Withstanding Voltage:1500V AC/minute
 Contact Resistance:10mΩ Max.
 Insulation Resistance:500MΩ Min.
 Temperature Range:-25°C~+85°C

ORDER INFORMATION

Series No.	Pins	Contact Plated	Special code	RoHS
		T		R


T:Tin

*Special Options Contact Our Sales Team.

514HF

Housing

PINS
2-12

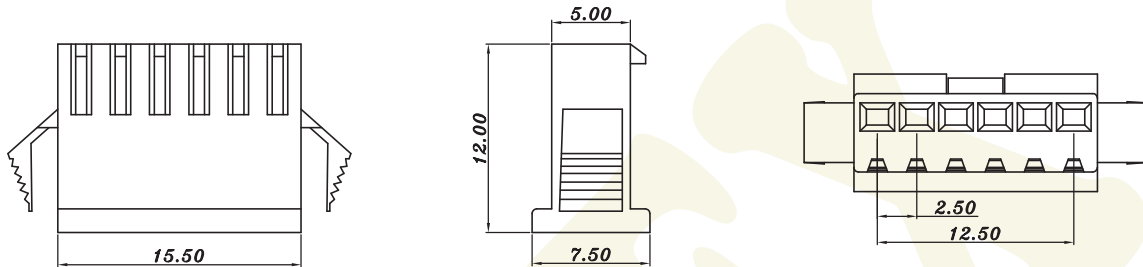


514TF

Terminal

514


Contact Plated	Unit
Tin	Per Reel

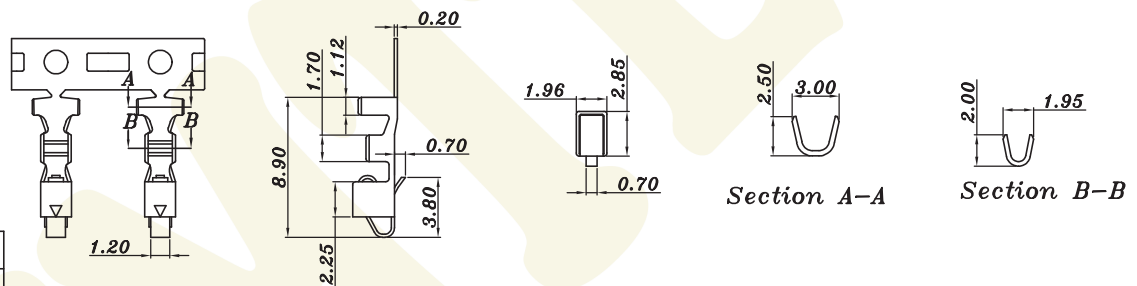

514HM

Housing

PINS
2-12

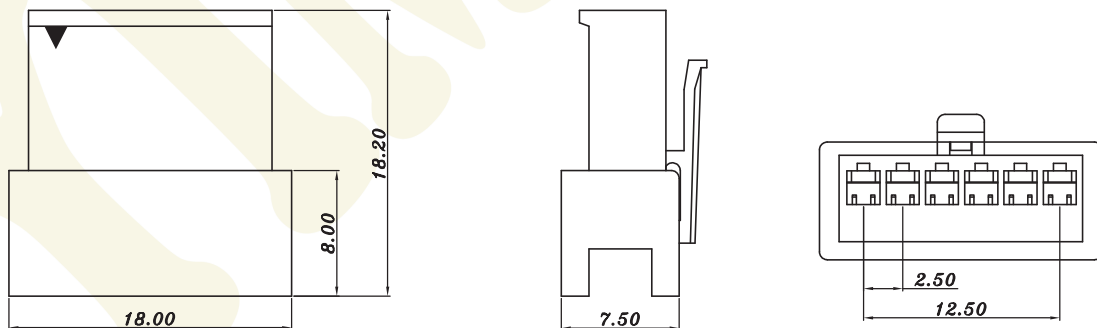

514TM

Terminal

Contact Plated	Unit
Tin	Per Reel

