


Pitch:2.5mm Disconnectable Crimp Type For PCB&Wire

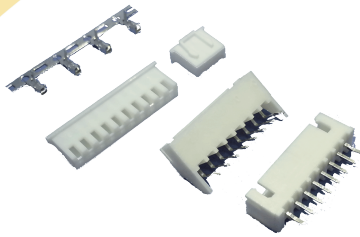

MATERIAL
 Insulator:Thermoplastics
 UL94V-0 or UL94V-2
 Contact:Copper Alloy
 Contact Plated:Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating:250V AC,DC
 Current Rating:3A AC,DC
 Withstanding Voltage:1000V AC/minute
 Contact Resistance:10mΩ Max.
 Insulation Resistance:1000MΩ Min.
 Temperature Range:-25°C~+85°C


ORDER INFORMATION

Series No.	Pins	Mounting Type	Contact Plated	Special code	RoHS
		S	T		R
		S: Straight Type R: Right Angle		T: Tin	

*Special Options Contact Our Sales Team.


510XW

Wafer Straight Type

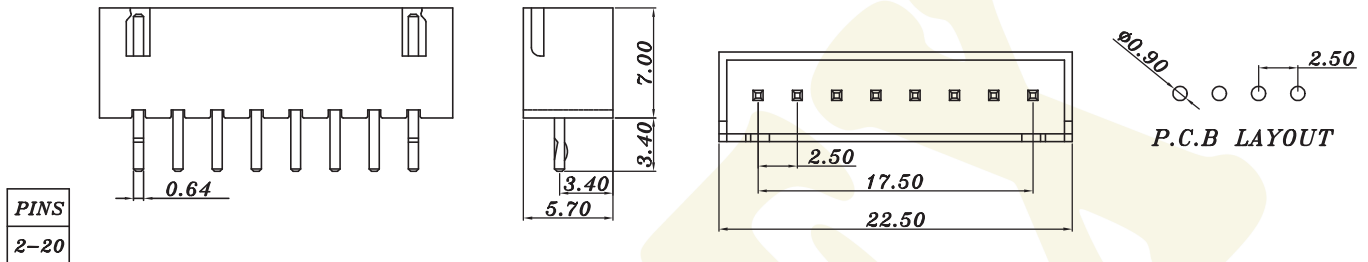


510XW

Wafer Right Angle

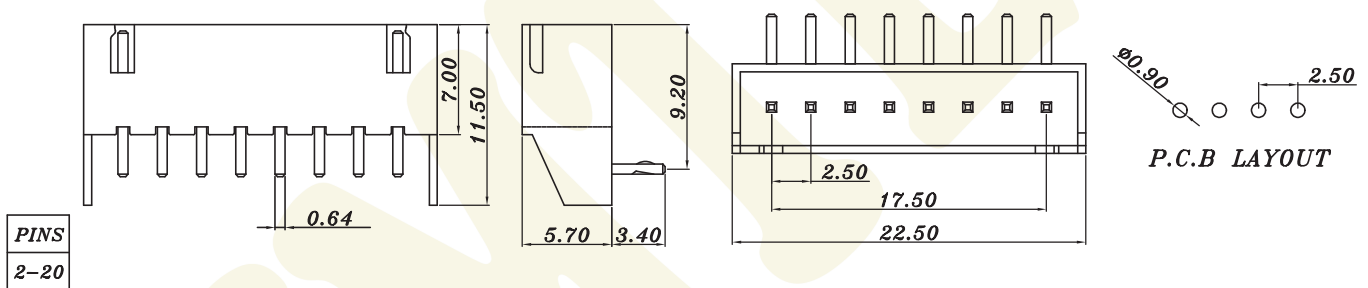

510XH

Housing

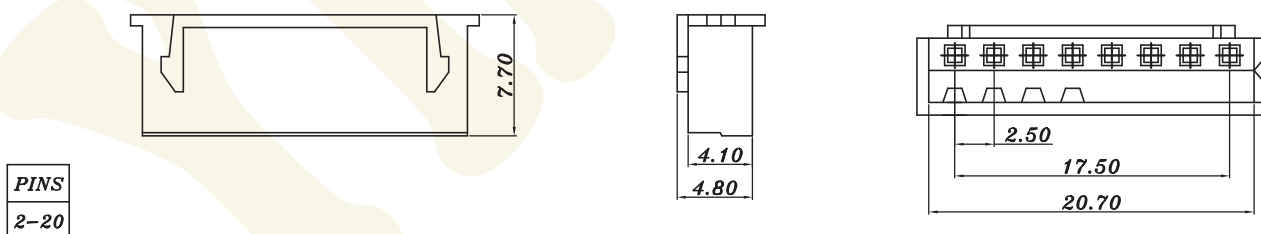

510XT

Terminal

