


Pitch:3.0mm Disconnectable Crimp Type For PCB&Wire

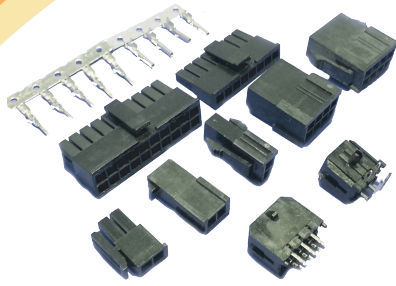

MATERIAL
 Insulator: Thermoplastics
 UL94V-0 or UL94V-2
 Contact: Copper Alloy
 Contact Plated: Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating: 250V AC, DC
 Current Rating: 5A AC, DC
 Withstanding Voltage: 1500V AC/minute
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Temperature Range: -25°C ~ +85°C


ORDER INFORMATION

Series No.	Pins	Mounting Type	Contact Plated	Special code	RoHS
		S	T		R
		S: Straight Type R: Right Angle	T: Tin		

*Special Options Contact Our Sales Team.


526WV

Wafer Straight Type

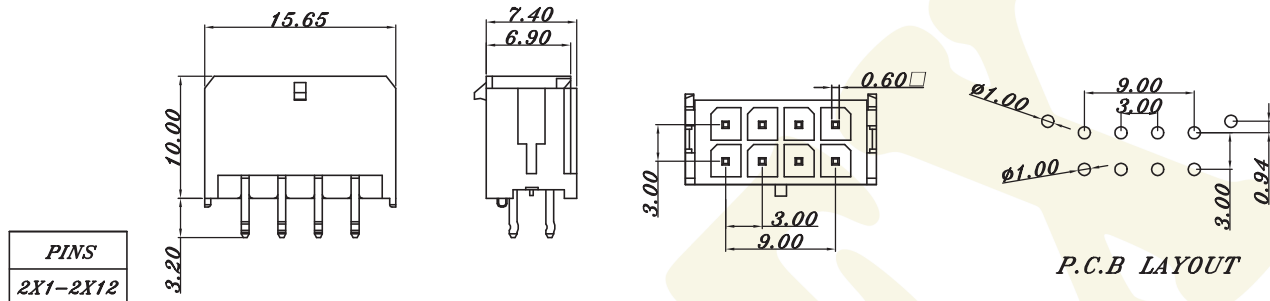

526MV


Wafer Right Angle

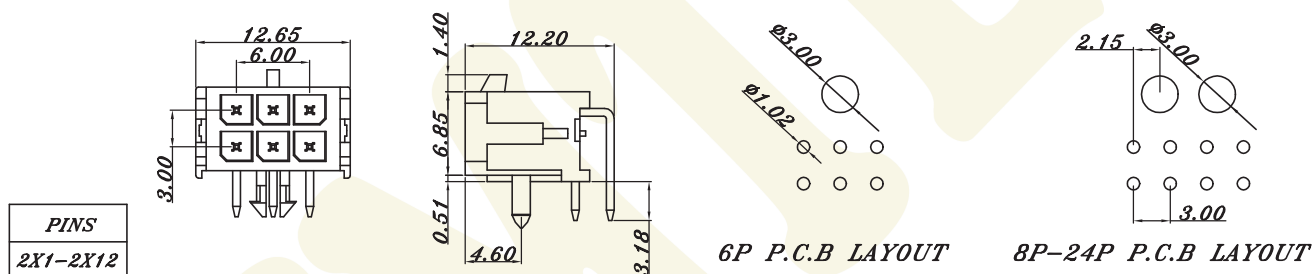

526

526HF/526TFS

Housing/Terminal

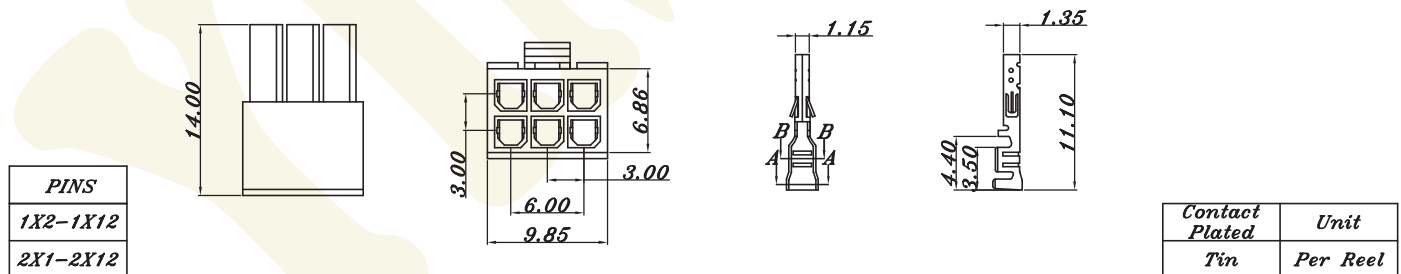

526HM/526TFP

Housing/Terminal

