


Pitch:3.5mm Disconnectable Crimp Type For PCB&Wire

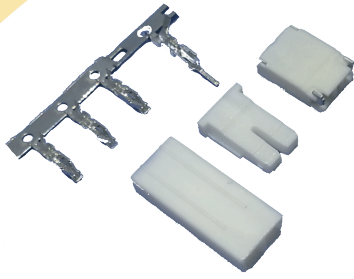

MATERIAL
 Insulator: Thermoplastics
 UL94V-0 or UL94V-2
 Contact: Copper Alloy
 Contact Plated: Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating: 1400V AC, DC
 Current Rating: 1A AC, DC
 Withstanding Voltage: 3800V AC/minute
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Temperature Range: -25°C ~ +85°C


ORDER INFORMATION

Series No.	Pins	Mounting Type	Contact Plated	Special code	RoHS
		M	T		R
		M: SMD R/A	T: Tin		

*Special Options Contact Our Sales Team.

527MW

Wafer SMD Right Angle

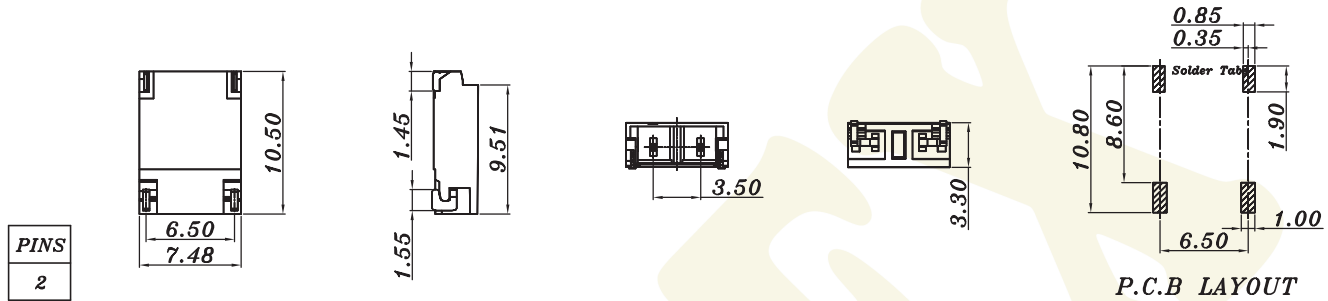


527MH

Housing



527MT

Terminal

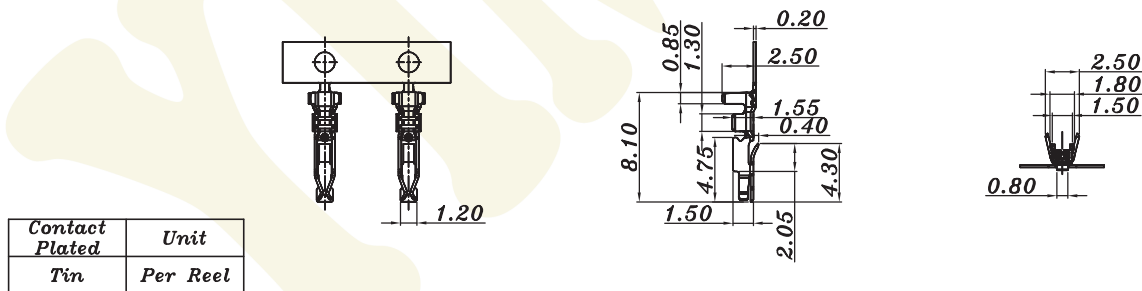

527FH/527FT

Housing/Terminal

