


Pitch:4.2mm Disconnectable Crimp Type For PCB&Wire

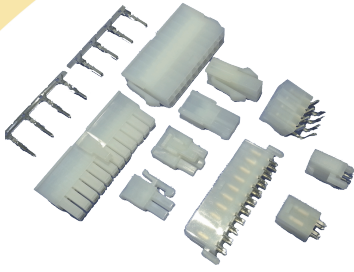

MATERIAL
 Insulator: Thermoplastics
 UL94V-0 or UL94V-2
 Contact: Copper Alloy
 Contact Plated: Tin or Gold over Nickel

SPECIFICATIONS
 Voltage Rating: 600V AC, DC
 Current Rating: 9A AC, DC
 Withstanding Voltage: 1500V AC/minute
 Contact Resistance: 10mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Temperature Range: -25°C ~ +85°C

ORDER INFORMATION

Series No.	Pins	Mounting Type	Contact Plated	Special code	RoHS
		S	T		R


S: Straight Type
 R: Right Angle

T: Tin

*Special Options Contact Our Sales Team.


576MWA/576MWAA

Wafer Straight Type

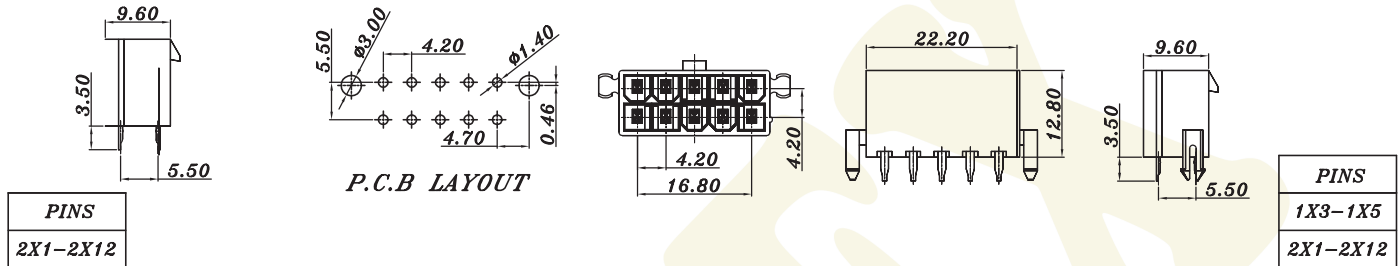


576MW

Wafer Straight Type/Right Angle

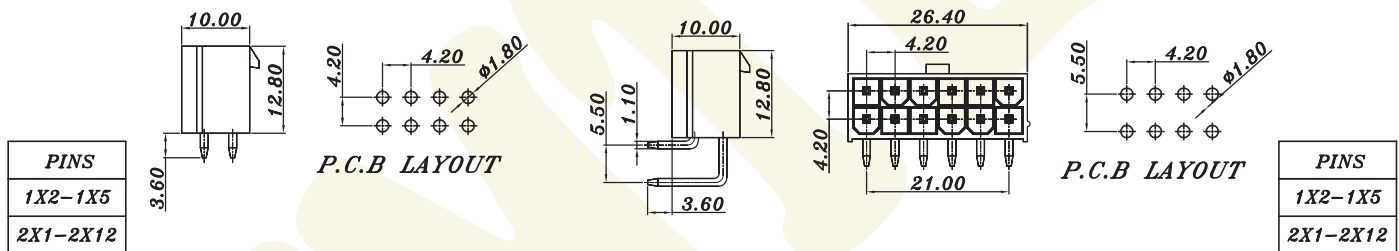

576FH/576FT

Housing/Terminal

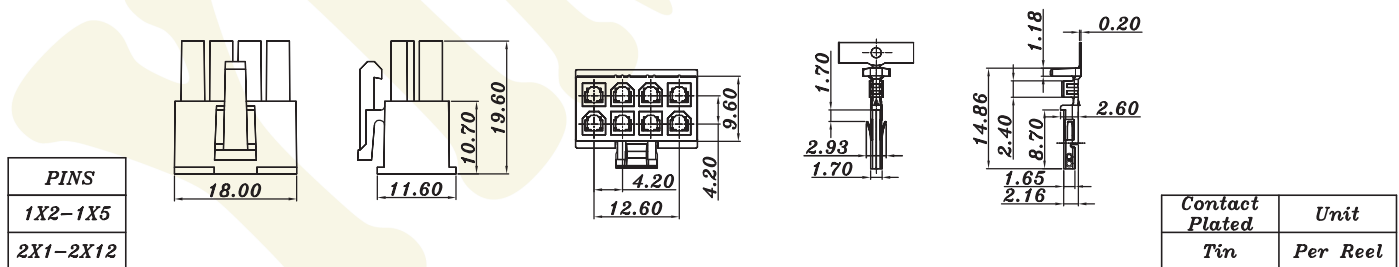

576MH/576MT

Housing/Terminal

