


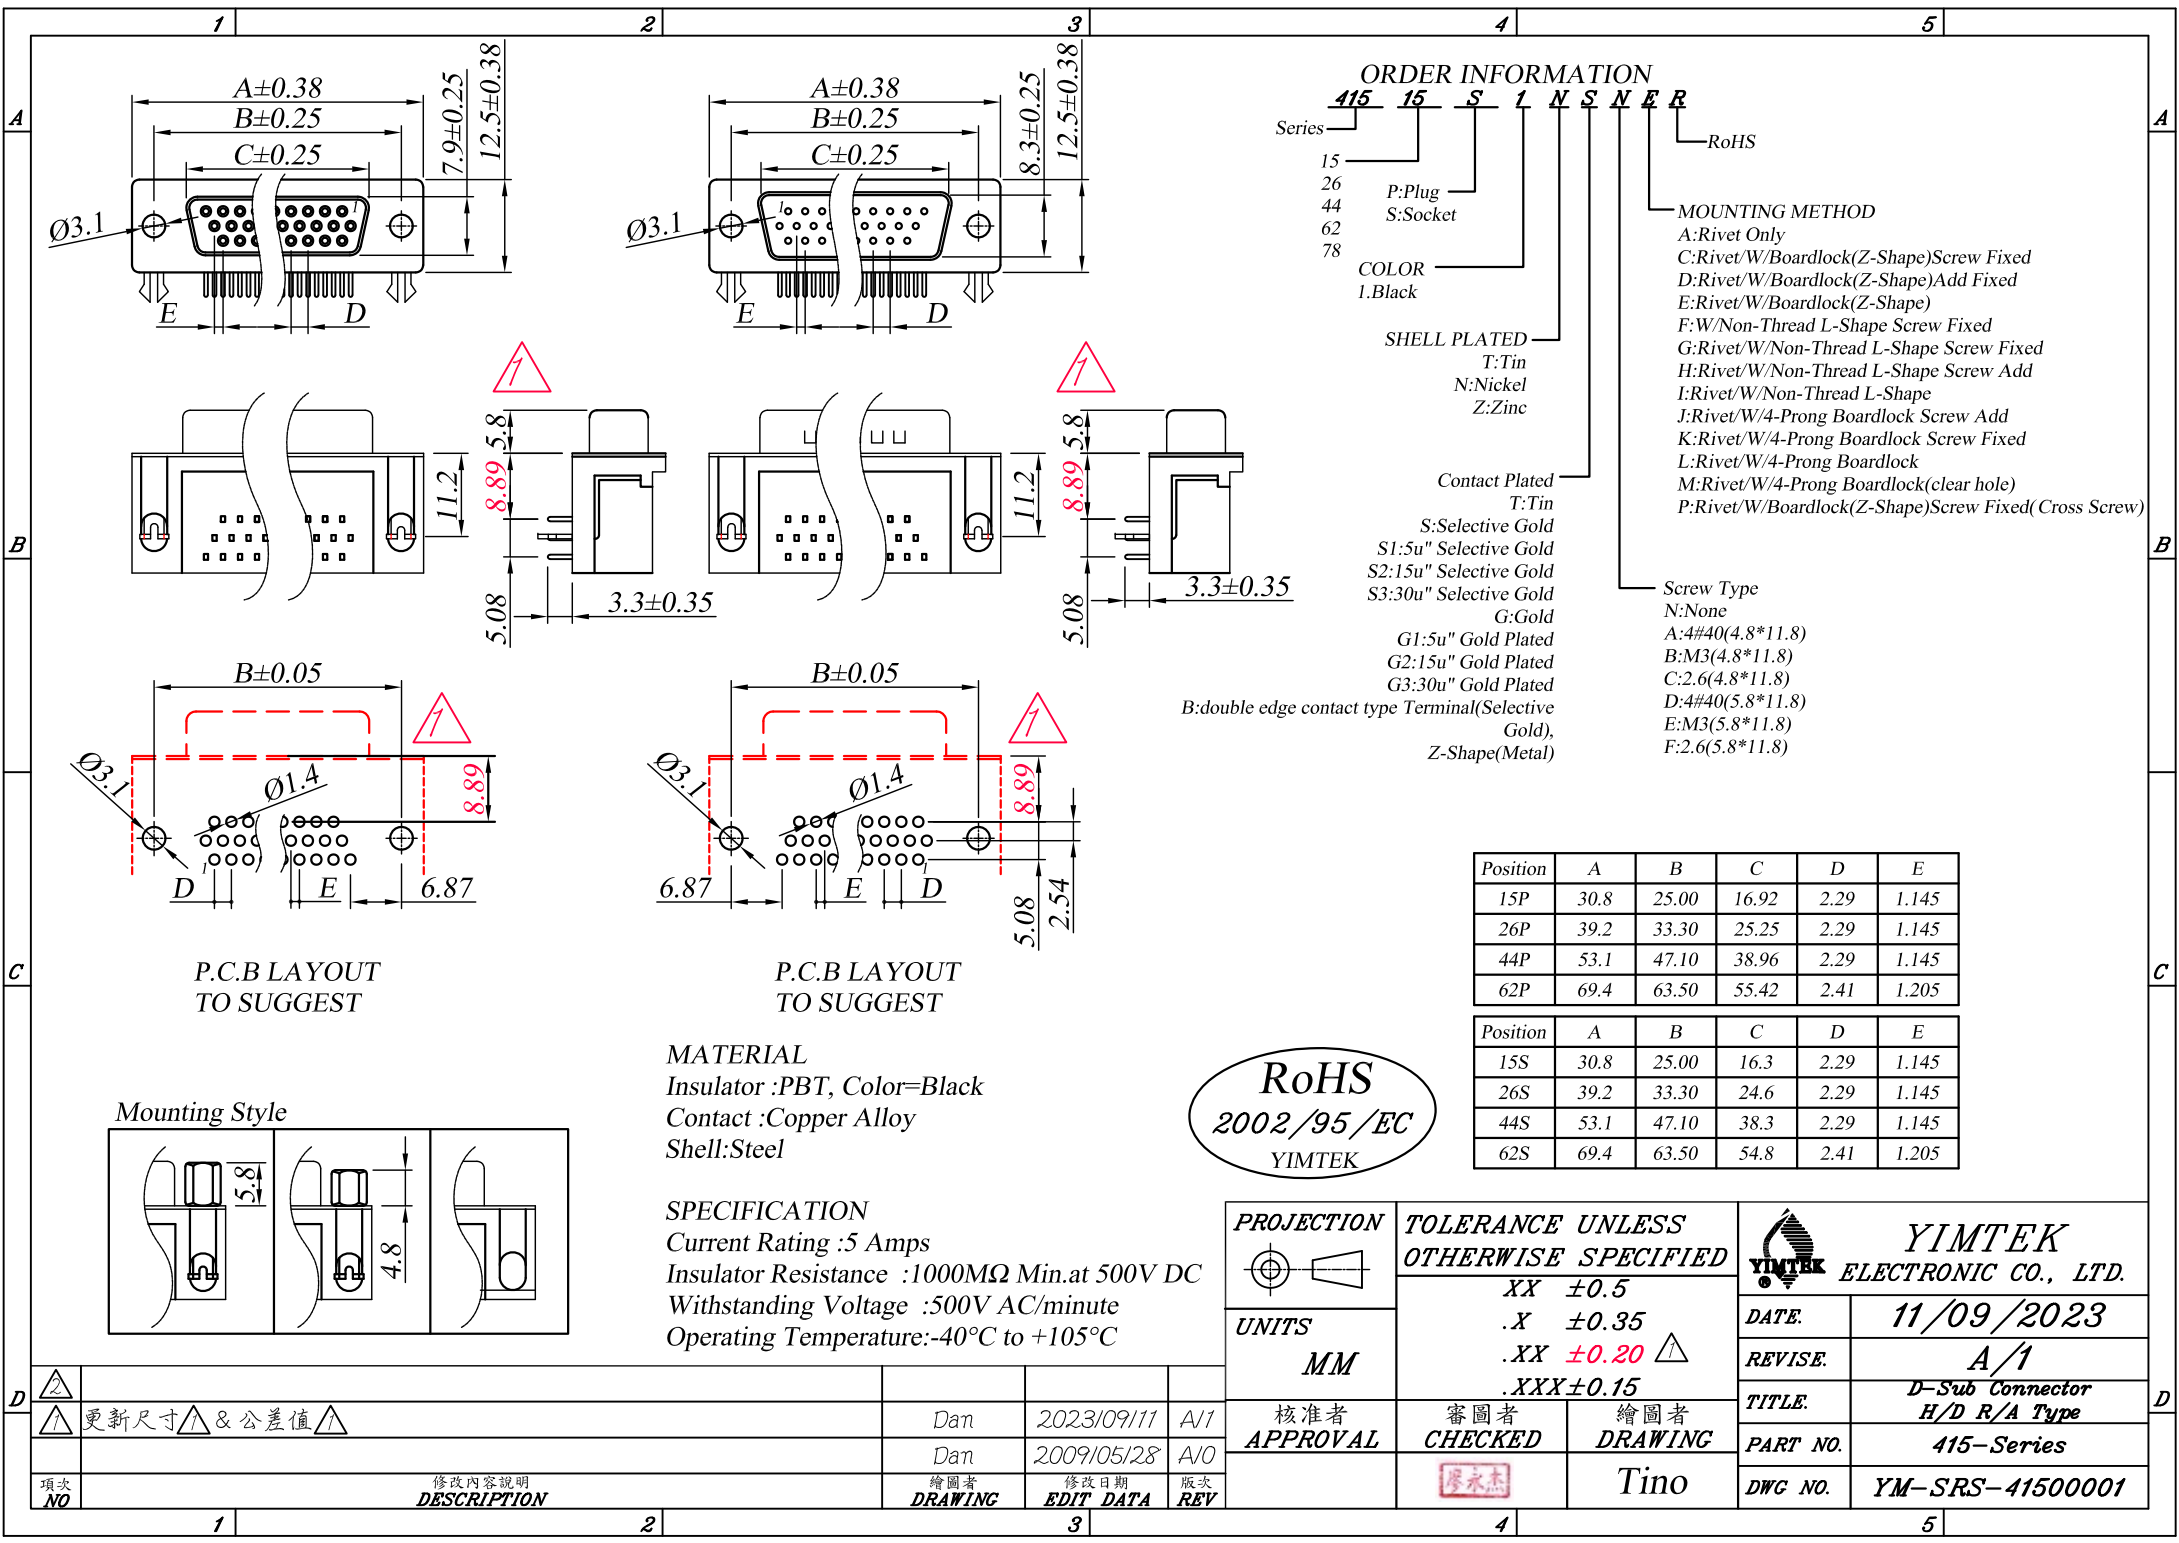

ORDER INFORMATION

Series 415 15 S 1 N S N E R
RoHS

15
26
44
62
78
P: Plug
S: Socket
COLOR
1. Black

SHELL PLATED
T: Tin
N: Nickel
Z: Zinc

Contact Plated
T: Tin
S: Selective Gold
S1: 5u" Selective Gold
S2: 15u" Selective Gold
S3: 30u" Selective Gold
G: Gold
G1: 5u" Gold Plated
G2: 15u" Gold Plated
G3: 30u" Gold Plated

B: double edge contact type Terminal (Selective Gold), Z-Shape (Metal)

MOUNTING METHOD

- A: Rivet Only
- C: Rivet/W/Boardlock (Z-Shape) Screw Fixed
- D: Rivet/W/Boardlock (Z-Shape) Add Fixed
- E: Rivet/W/Boardlock (Z-Shape)
- F: W/Non-Thread L-Shape Screw Fixed
- G: Rivet/W/Non-Thread L-Shape Screw Fixed
- H: Rivet/W/Non-Thread L-Shape Screw Add
- I: Rivet/W/Non-Thread L-Shape
- J: Rivet/W/4-Prong Boardlock Screw Add
- K: Rivet/W/4-Prong Boardlock Screw Fixed
- L: Rivet/W/4-Prong Boardlock
- M: Rivet/W/4-Prong Boardlock (clear hole)
- P: Rivet/W/Boardlock (Z-Shape) Screw Fixed (Cross Screw)

Screw Type

- N: None
- A: #40 (4.8*11.8)
- B: M3 (4.8*11.8)
- C: 2.6 (4.8*11.8)
- D: #40 (5.8*11.8)
- E: M3 (5.8*11.8)
- F: 2.6 (5.8*11.8)

Position	A	B	C	D	E
15P	30.8	25.00	16.92	2.29	1.145
26P	39.2	33.30	25.25	2.29	1.145
44P	53.1	47.10	38.96	2.29	1.145
62P	69.4	63.50	55.42	2.41	1.205

Position	A	B	C	D	E
15S	30.8	25.00	16.3	2.29	1.145
26S	39.2	33.30	24.6	2.29	1.145
44S	53.1	47.10	38.3	2.29	1.145
62S	69.4	63.50	54.8	2.41	1.205



MATERIAL
Insulator :PBT, Color=Black
Contact :Copper Alloy
Shell:Steel

SPECIFICATION
Current Rating :5 Amps
Insulator Resistance :1000MΩ Min.at 500V DC
Withstanding Voltage :500V AC/minute
Operating Temperature:-40°C to +105°C


PROJECTION
UNITS
MM

TOLERANCE UNLESS OTHERWISE SPECIFIED
XX ±0.5
.X ±0.35
.XX ±0.20
.XXX ±0.15

YIMTEK ELECTRONIC CO., LTD.

DATE.	11/09/2023
REVISE.	A/1
TITLE.	D-Sub Connector H/D R/A Type
PART NO.	415-Series
DWG NO.	YM-SRS-41500001

Mounting Style

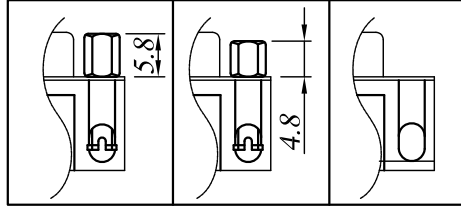

2	更新尺寸△ & 公差值△	Dan	2023/09/11	A/1
1	修改内容说明 DESCRIPTION	Dan	2009/05/28	A/0
NO		繪圖者 DRAWING	修改日期 EDIT DATA	版次 REV