

P.C.B LAYOUT TO SUGGEST

**MATERIAL**  
 Insulator:PBT(UL94V-0)  
 Contact:Copper Alloy  
 Shell:Steel

**SPECIFICATION**  
 Current Raing:5Amps  
 Insulation Resistance:1000MΩ Min.at 500V DC  
 Withstanding Voltage:500V AC/minute  
 Operating Temperature:-55 °C to 105 °C

**ORDER INFORMATION**

**427 15S 1 N S N C R**

Series — 15S — RoHS

COLOR — 1:Black — 3:Blue


SHELL PLATED — T:Tin — N:Nickel — Z:Zinc

Contact Plated — T:Tin — S:Selective Gold — S1:5u" Selective Gold — S2:15u" Selective Gold — S3:30u" Selective Gold — G:Gold — G1:5u" Gold Plated — G2:15u" Gold Plated — G3:30u" Gold Plated

MOUNTING METHOD — F:Rivet W/Boardlock(Z-Shape)Screw Fixed — G:Rivet W/Boardlock(Z-Shape)Add Screw — H:Rivet W/Boardlock(Z-Shape) — X:Rivet W/O Boardlock(Z-Shape)Screw Fixed — Y:Rivet W/O Boardlock(Z-Shape)Add Fixed — Z:Rivet W/O Boardlock(Z-Shape)

Screw Type — N:None — A:4#40(4.8\*11.8) — D:4#40(5.8\*11.8)

**Mounting Style**

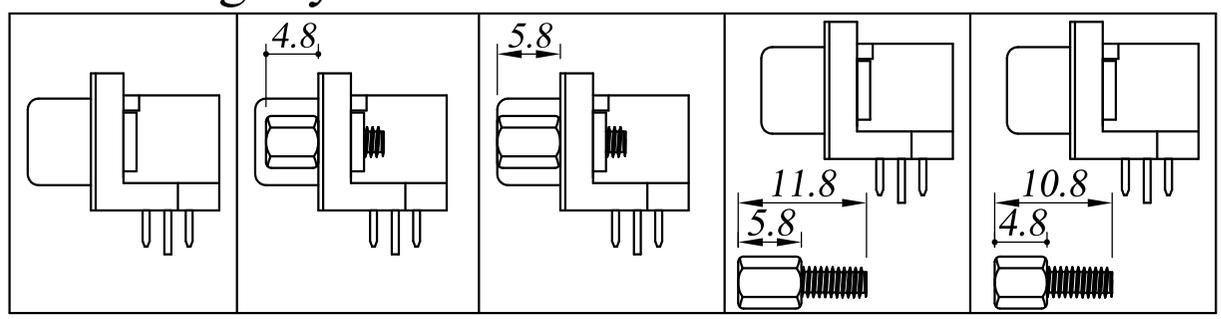

PROJECTION 	TOLERANCE UNLESS OTHERWISE SPECIFIED		<b>YIMTEK</b> ELECTRONIC CO., LTD.
	UNITS	.XX ±0.5 .X ±0.25 .XX ±0.10 .XXX ±0.05	
MM	核准者 APPROVAL	審圖者 CHECKED	繪圖者 DRAWING
		SAM	Tino

3				
2				
1				
項次 NO	修改內容說明 DESCRIPTION	繪圖者 DRAWING	修改日期 EDIT DATA	版次 REV