
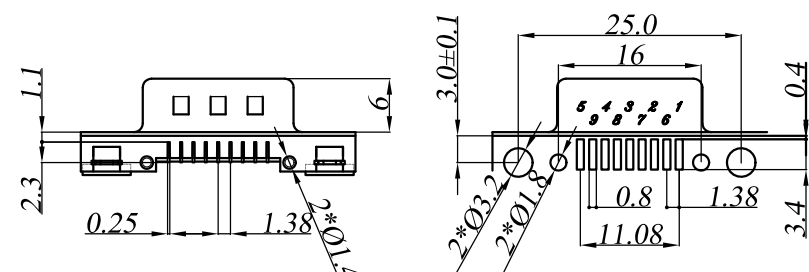


MATERIAL
 Insulator: Nylon 9T (Black) ,UL94V-0.
 Contact:Copper Alloy
 Shell:Steel

SPECIFICATION
 Current Rating: 5Amps.
 Insulator Resistance: 1000MΩ Min ,at 500V DC.
 Contact Resistance: 20mΩ Max.
 Withstanding Voltage: 1000V AC/minute.
 Reflow Processing Temperature & Time: 240°C For 6 Seconds.
 Peak Reflow Processing Temperature & Time: 230°C For 60 Seconds.
 Operating Temperature: -55°C~ +125°C.

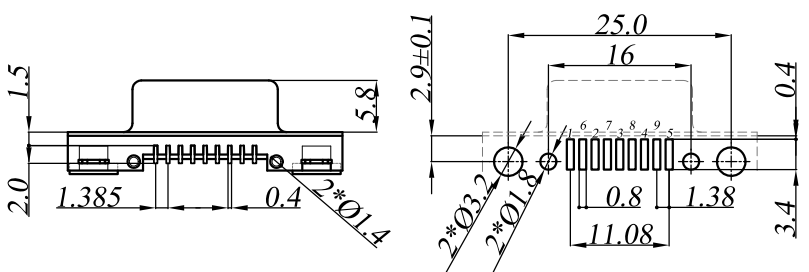

ORDER INFORMATION


442A 09S 1 N S N C R (YM)

Series
 09S(Socket)
 09P(Plug)
 COLOR
 1:Black
 SHELL PLATED
 N:Nickel
 Contact Plated
 S:Selective Gold
 S1:5u" Selective Gold
 S2:15u" Selective Gold
 S3:30u" Selective Gold

YM Logo
 RoHS
 MOUNTING METHOD
 C:Rivet W/4-Prong Boardlock Screw Fixed
 D:Rivet W/4-Prong Boardlock ADD Fixed
 E:Rivet W/4-Prong Boardlock
 F:Rivet W/Boardlock(Z-Shape)Screw Fixed
 G:Rivet W/Boardlock(Z-Shape)Add Screw
 H:Rivet W/Boardlock(Z-Shape)
 I:Rivet W/Round Boardlock(Z-Shape)
 J:Rivet W/Round Boardlock(Z-Shape)Screw Fixed

Screw Type
 N:None
 A:4#40(4.8*11.8)
 B:M3(4.8*11.8)
 C:2.60(4.8*11.8)
 D:4#40(5.8*11.8)
 E:M3(5.8*11.8)
 F:2.6(5.8*11.8)

Mounting Style

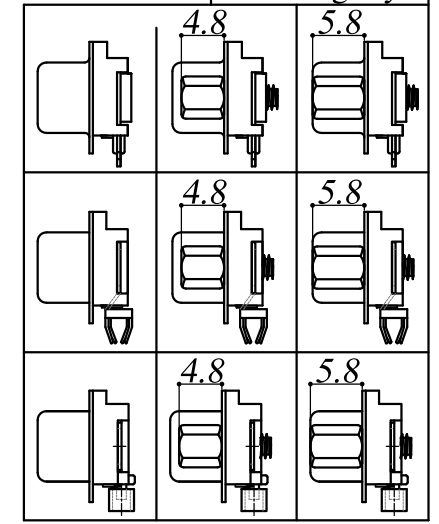

PROJECTION 	TOLERANCE UNLESS OTHERWISE SPECIFIED		 YIMTEK ELECTRONIC CO., LTD.
	UNITS	MM	
核准者 APPROVAL	審圖者 CHECKED	繪圖者 DRAWING	
	SAM	Tino	

3				
2				
1				
項次 NO	修改內容說明 DESCRIPTION	繪圖者 DRAWING	修改日期 EDIT DATA	版次 REV