


CENTRONIC STRAIGHT TYPE

YIMTEX.

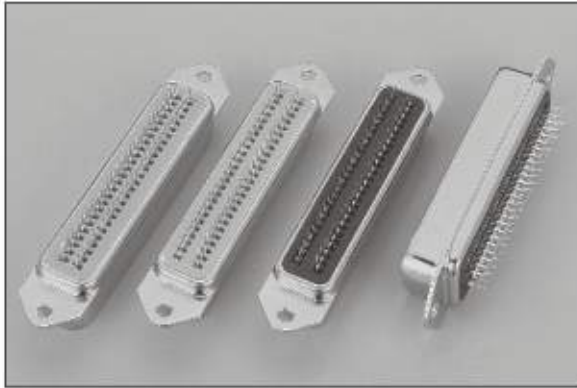


MATERIAL


Insulator : PB T+30% Glass Fiber (UL94V-0)
 Contact : Phosphor Bronze
 Contact Plated: Gold over Nickel
 Shell : Steel Zinc plated or Tin plated

SPECIFICATION


Current Rate : 5 Amps
 Insulator Resistance : 1000MΩ Min. at 500V DC
 Dielectric Strength : 500V per minute
 Operation Temperature: -55°C to + 105°C

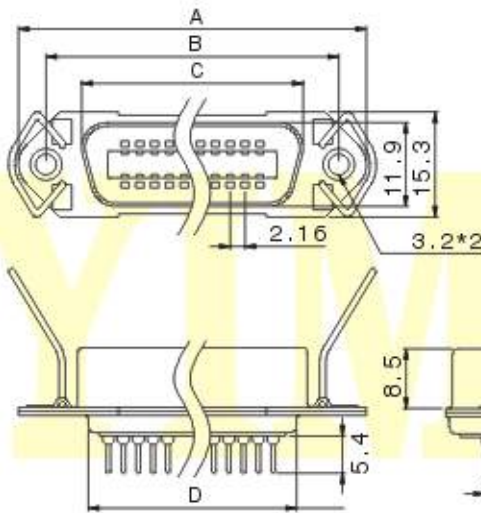


FEMALE W/LATCH

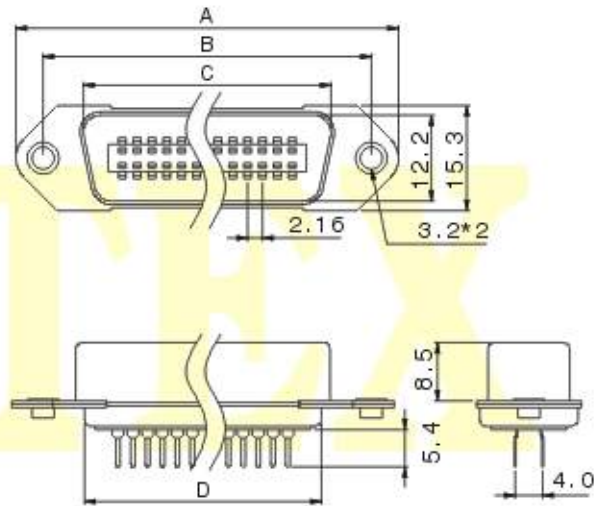

MALE W/O LATCH

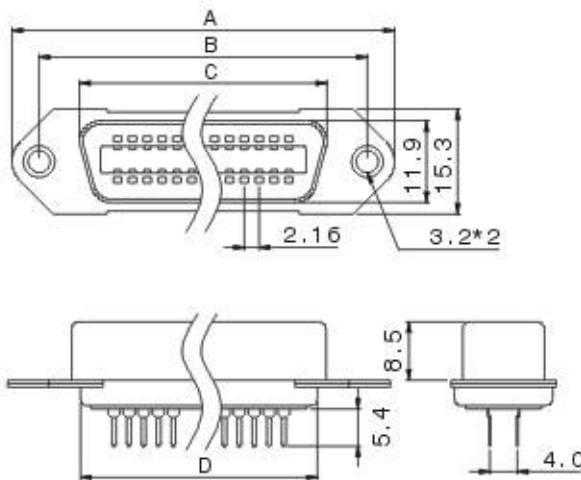

FEMALE W/O LATCH

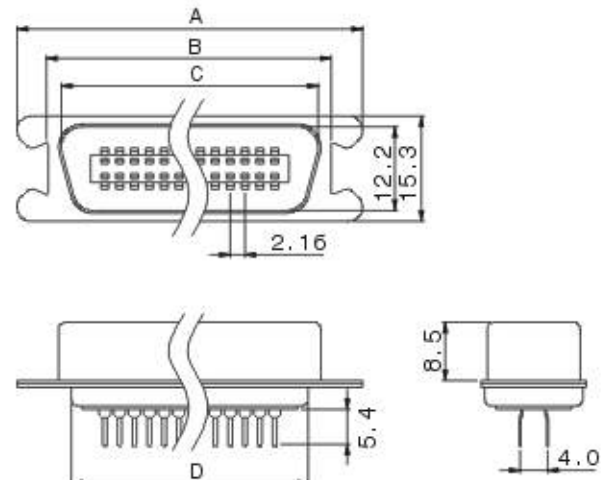

MALE-MOLDED TYPE

CENTRONIC STRAIGHT TYPE

YIMTEX.

POSITION	A	B	C	D
14F	43.90	36.00	25.20	22.70
24F	54.70	46.80	36.00	33.50
36F	67.70	59.70	48.90	46.60
50F	82.80	74.90	64.10	61.70

FEMALE W/LATCH

POSITION	A	B	C	D
14M	43.90	36.00	25.50	22.70
24M	54.70	46.80	36.30	33.50
36M	67.70	59.70	49.30	46.60
50M	82.80	74.90	64.40	61.70

MALE W/O LATCH

POSITION	A	B	C	D
14F	43.90	36.00	25.20	22.70
24F	54.70	46.80	36.00	33.50
36F	67.70	59.70	48.90	46.60
50F	82.80	74.90	64.10	61.70

FEMALE W/O LATCH

POSITION	A	B	C	D
14M	38.50	29.40	25.50	21.90
24M	49.30	40.20	36.30	32.70
36M	62.00	53.50	49.30	45.80
50M	77.40	68.30	64.40	61.10

MALE-MOLDED TYPE

ORDER INFORMATION:

Series No.	Pins	Contact Type	Housing Color	Shell Plating	Contact Plating	Mounting Method	Accessories
412	14	S	1	N	S	A	N
	14	P: Plug (Panel Type)	1: (Black)	N: Nickel	T: Tin	A: Through Hole	N: None
	24	S: Socket	3: (Blue)		S: Selective Gold	B: Thread Insert #4-40 UNC	A: W/ Latch
	36	A: Male (W/Notch Ear)			G: Gold Flash		
	50				S1: 5u" Selective Gold		
					S2: 15u" Selective Gold		
					S3: 30u" Selective Gold		
					G1: 5u" Gold Flash		
					G2: 15u" Gold Flash		
					G3: 30u" Gold Flash		