


ORDER

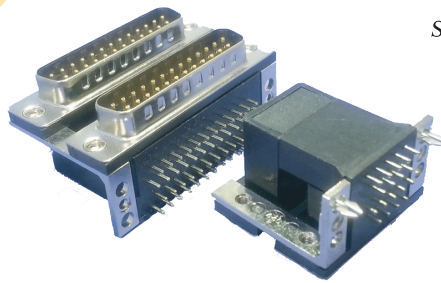

Series **409-09-B-B-N-S-N-A-R**

Pins
 HD15S/9P
 09
 15
 25
 37
 24/HD15S
 29/HD15S

Upper/Lower
 A: Plug/Plug
 B: Socket/Socket
 C: Plug/Socket
 D: Socket/Plug

Port Spacing
 A: 15.88mm(0.625")
 B: 19.05mm(0.750")
 C: 22.86mm(0.90")
 D: 15.88mm(0.625")
 E: 19.05mm(0.750")
 F: 22.86mm(0.90")






SPECIAL CODE
 Special code
 RoHS

MOUNTING METHOD
 A: Rivet W/Dual (7.9mm) Boardlock
 B: Rivet W/Dual (7.9mm) Boardlock Fixed Screw
 C: Rivet W/Dual (7.9mm) Boardlock Add Screw
 D: Singal (7.9mm) Boardlock
 F: Rivet L-shape (7.9mm) Add Screw
 G: Rivet L-shape (7.9mm) Fixed Screw

SCREW TYPE
 N: None
 A: 4#40(4.8*11.8)
 B: M3(4.8*11.8)
 C: 2.6(4.8*11.8)
 D: 4#40(5.8*11.8)
 E: M3(5.8*11.8)
 F: 2.6(5.8*11.8)

CONTACT PLATING
 S: Selective Gold

SHELL PLATED
 N: Nickel

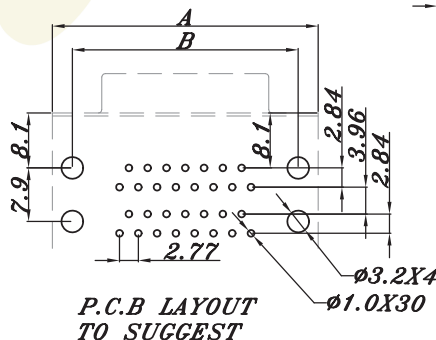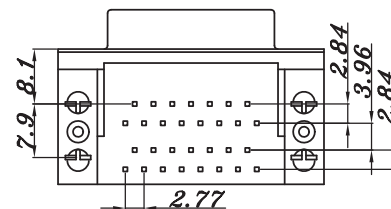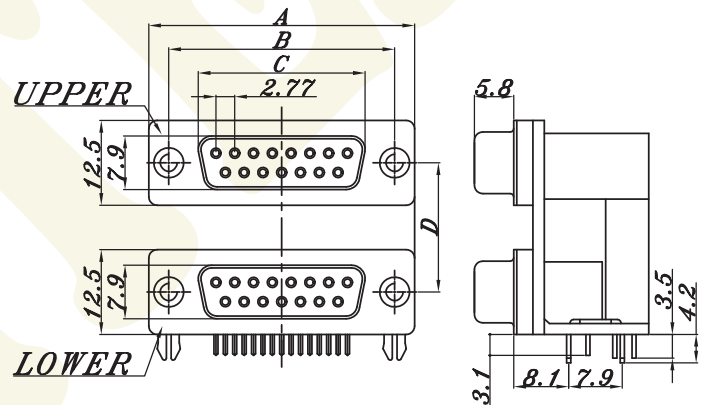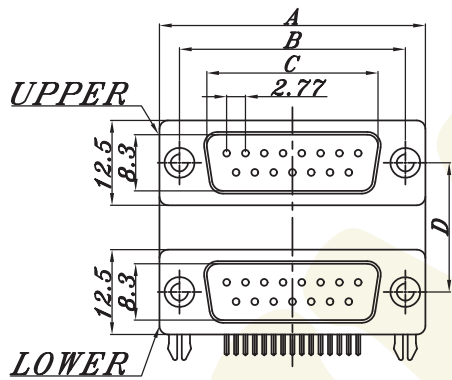

A	B	C	POSITION	A	B	C
30.8	25.0	16.3	9S/9P	30.8	25.0	16.92
39.2	33.3	24.6	15S/15P	39.2	33.3	25.25
53.1	47.1	38.3	25S/25P	53.1	47.1	38.96
69.4	63.5	54.8	37S/37P	69.4	63.5	55.42

DIMENSION OF "D"

A	15.88
B	19.05
C	22.86

409