

Pitch:1.27mm DIP PLUG H/D For Ribbon Cable

MATERIAL

Insulator:Nylon UL94V-0

Contact:Copper Alloy

**Special Options Contact Our Sales Team.*

SPECIFICATIONS

Current Rating:0.5A AC,DC

Withstanding Voltage:300V AC/minute








Insulation Resistance:1000MΩ Min. at 500V DC.

Temperature Range:-40°C~+85°C

POSITION
20
26
30
34
40
50
60
68
80
100

ORDER

311-20-1-A-S-R
Series Pins Housing Color Contact Material Contact Plated RoHS
20-100
1:Black
3:Blue
A:Brass
B:Phosphor Bronze
T:Tin
G:Gold Flash
S:Selective Gold

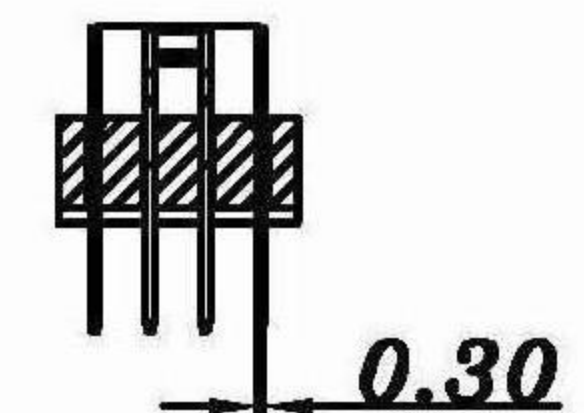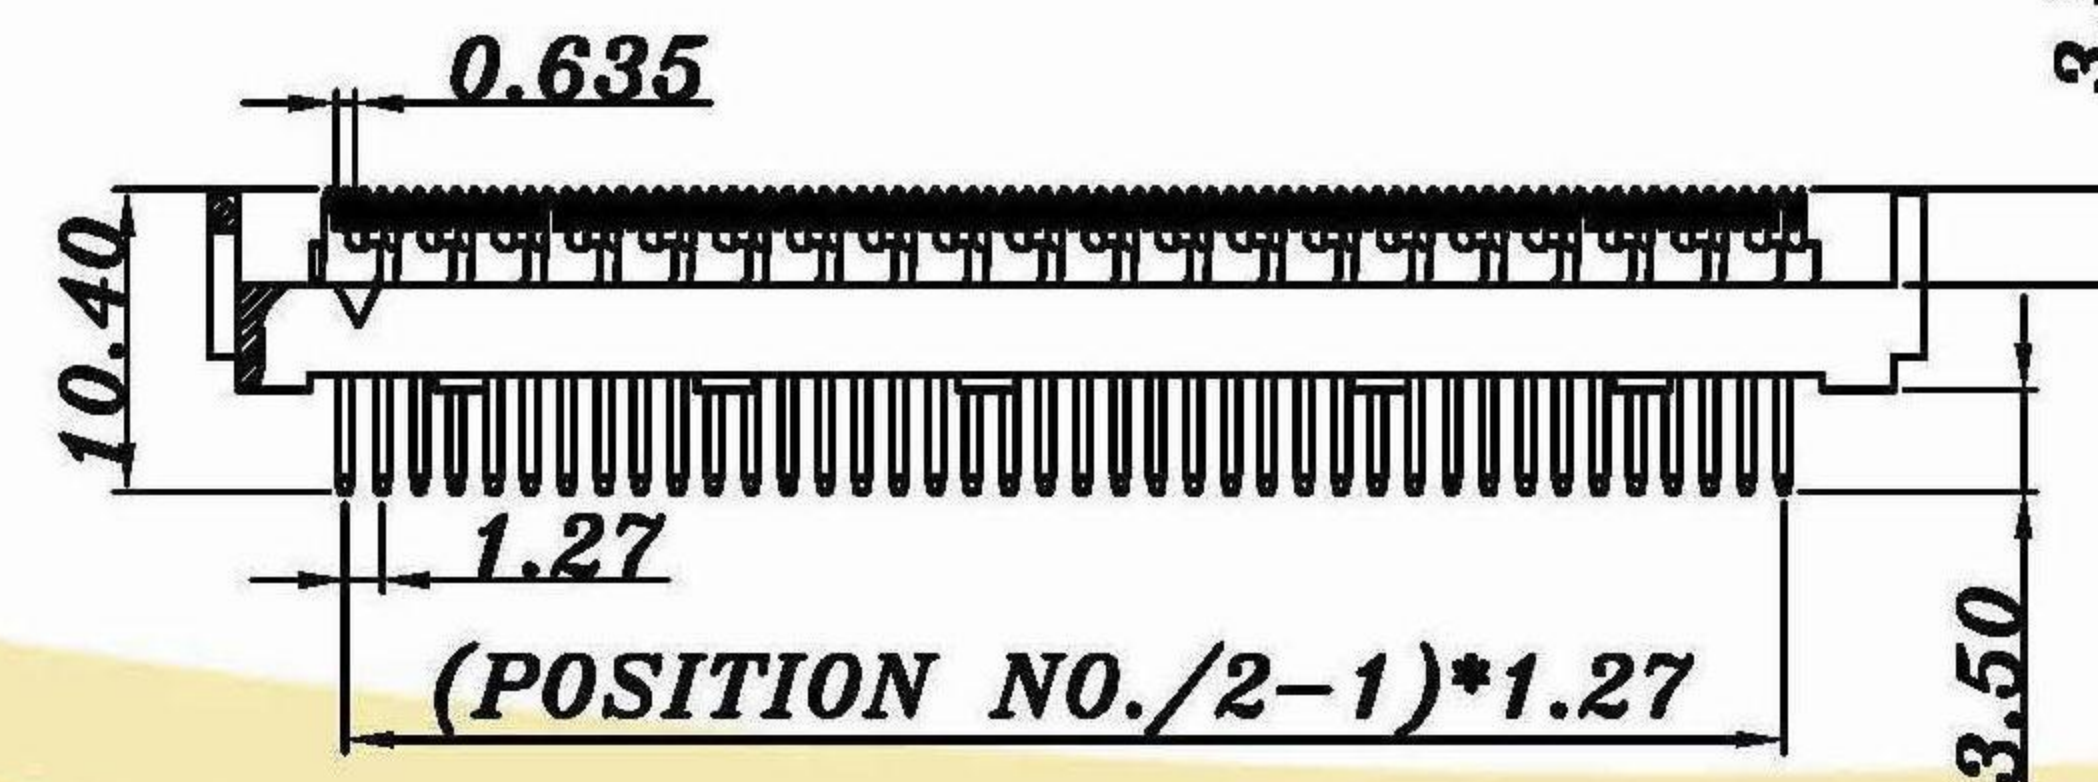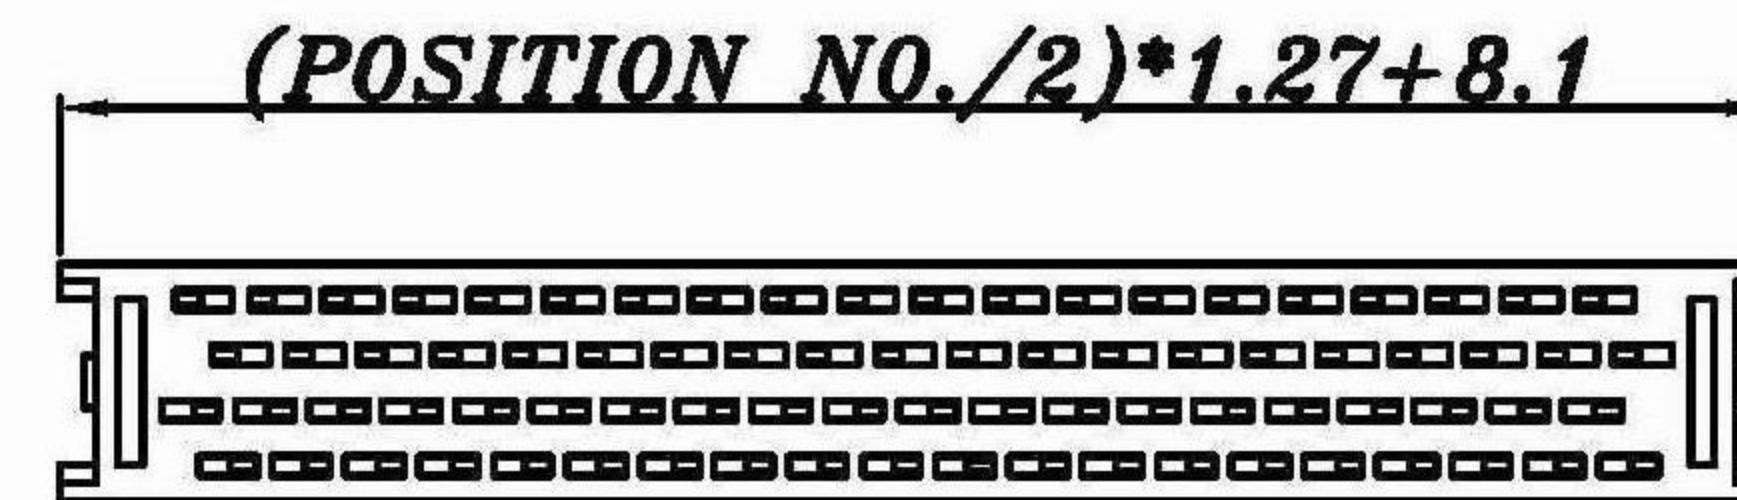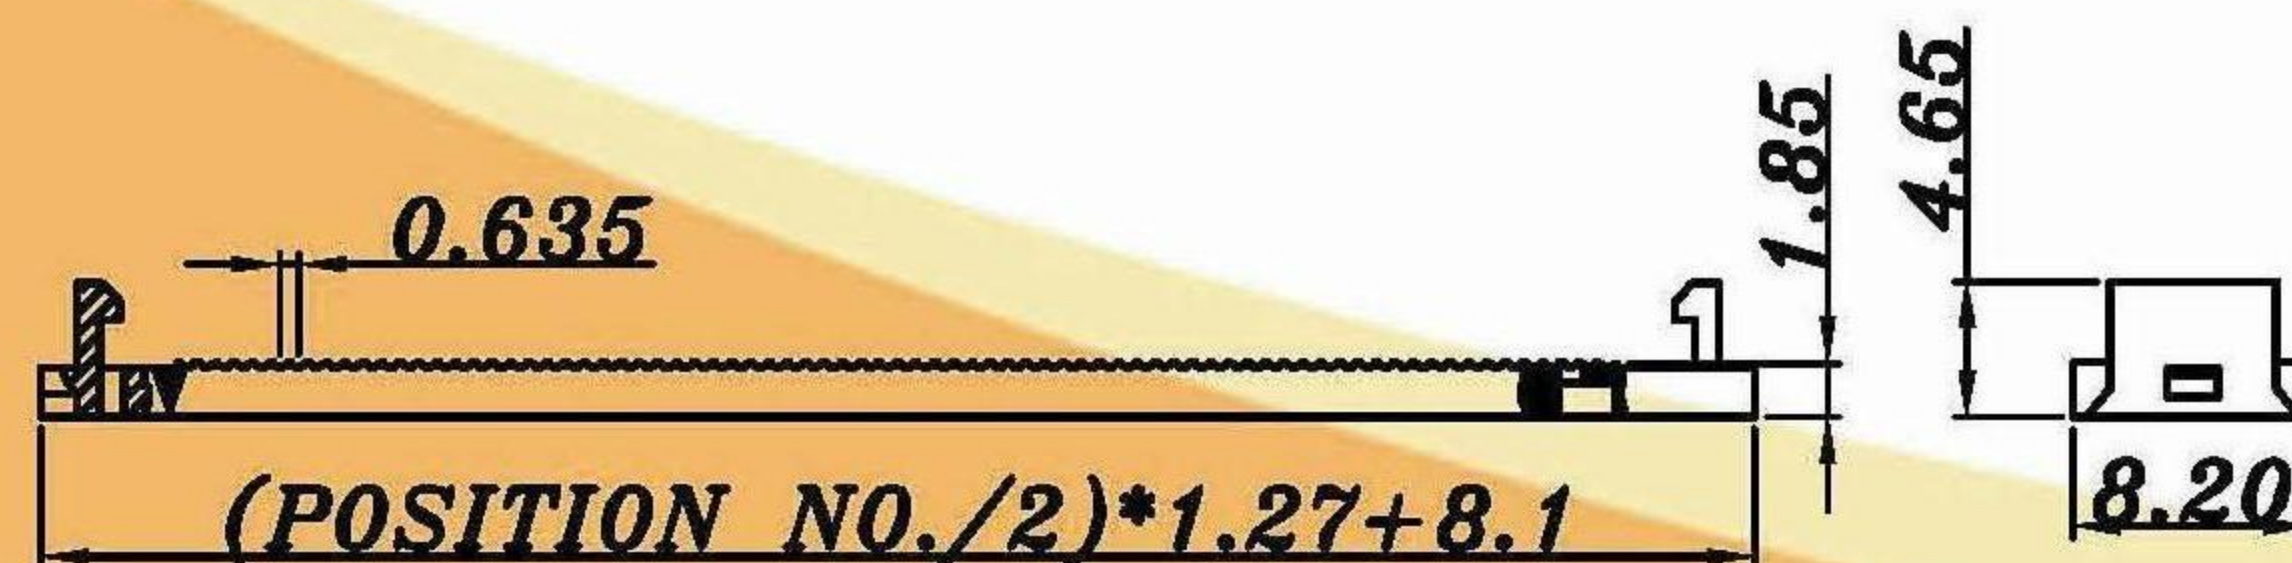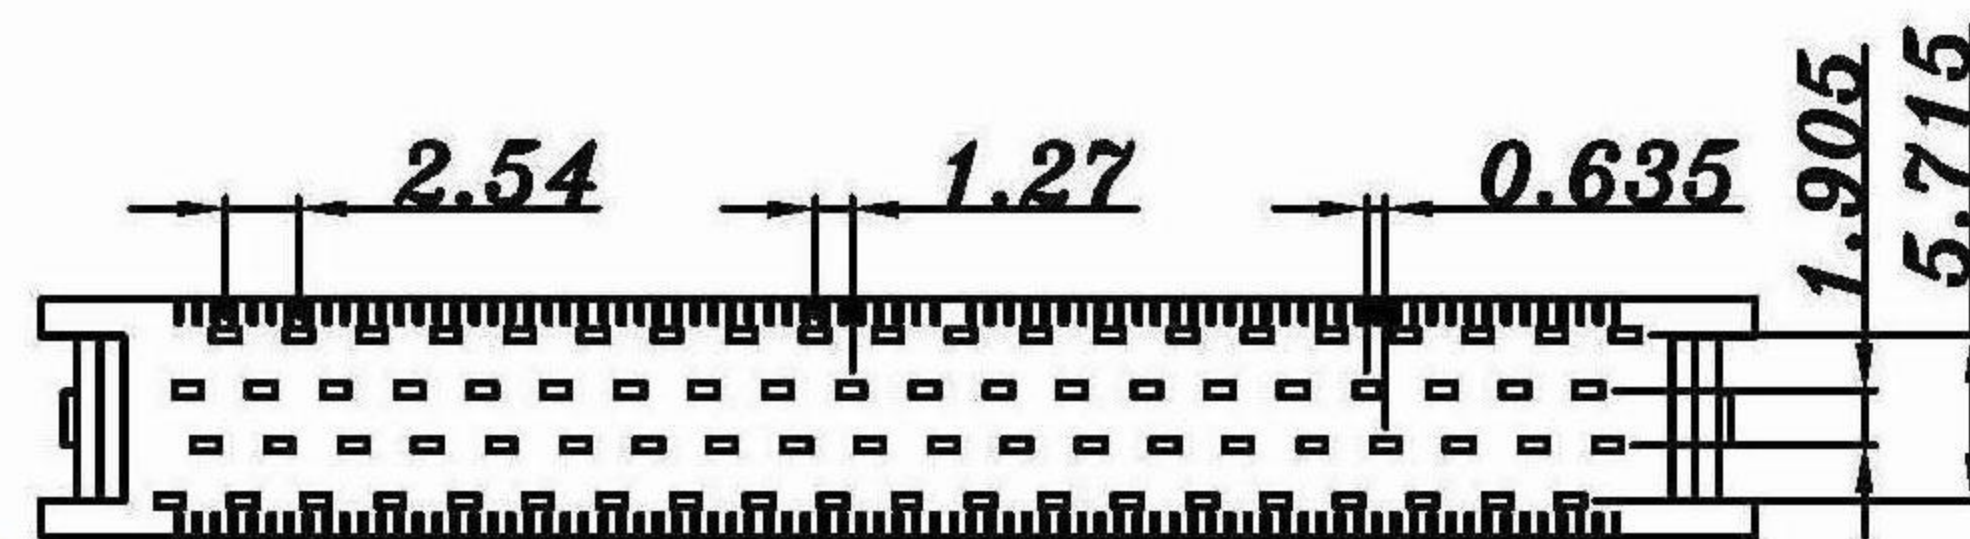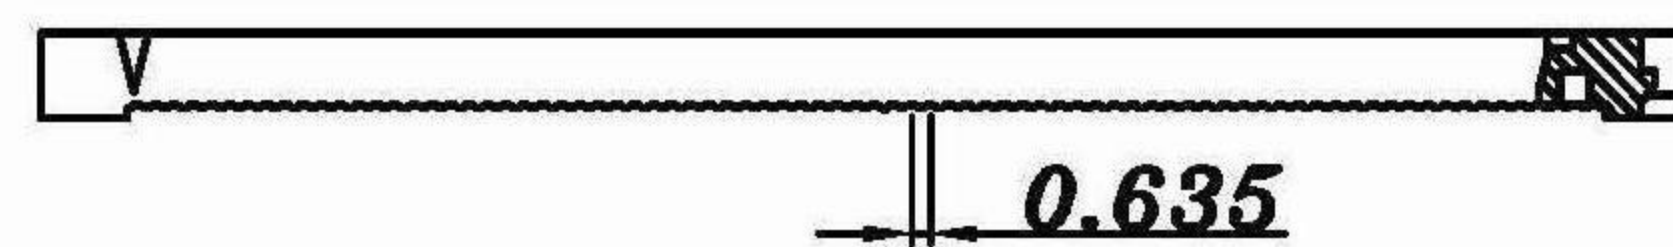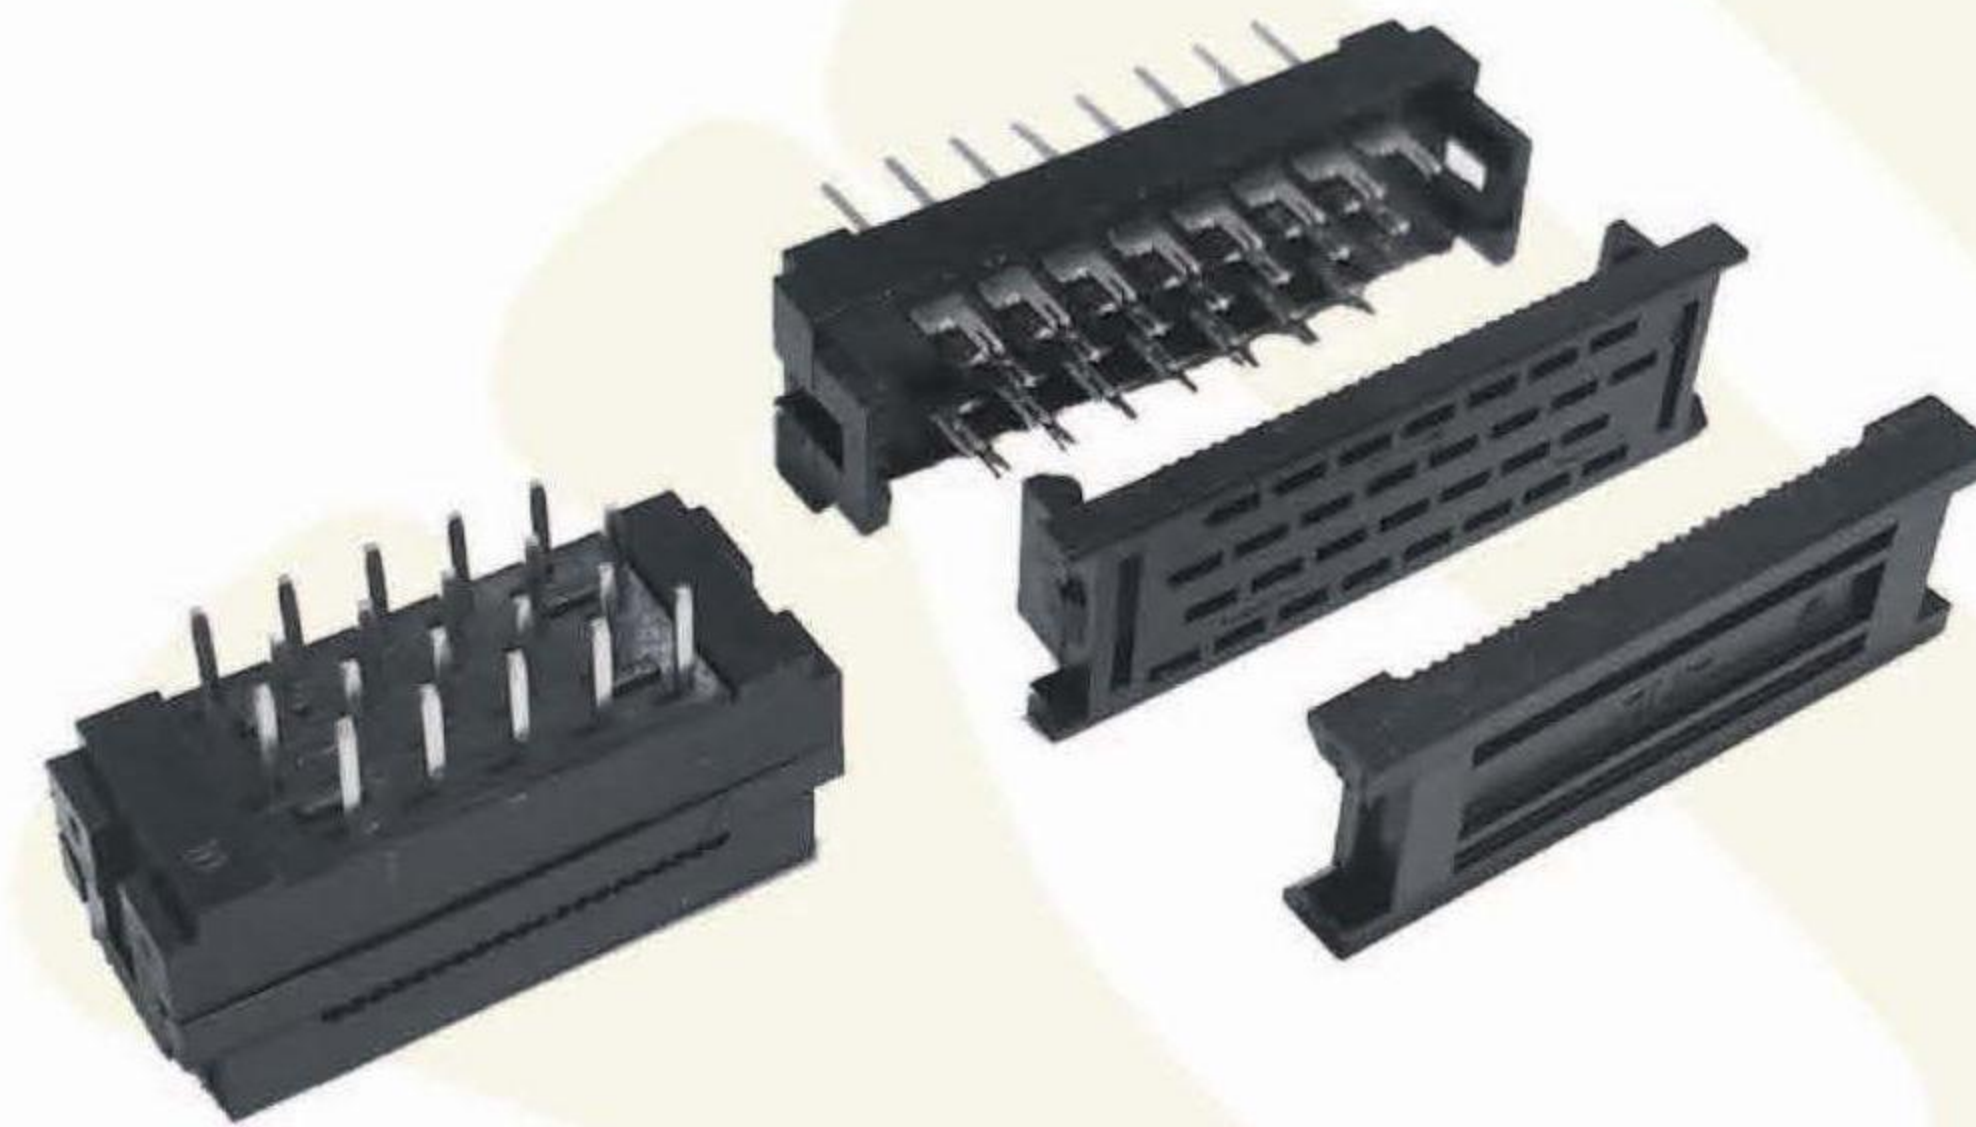

311