

Pitch:2.54mm DIP PLUG For Ribbon Cable






MATERIAL
Insulator:PBT UL94V-0
Contact:Copper Alloy

**Special Options Contact Our Sales Team.*

SPECIFICATIONS
Current Rating:1A AC,DC
Withstanding Voltage:500V AC/minute
Insulation Resistance:1000MΩ Min. at 500V DC.
Temperature Range:-40°C~+105°C

POSITION	POSITION
6	26
8	30
10	34
12	36
14	40
16	50
18	60
20	64
24	

ORDER

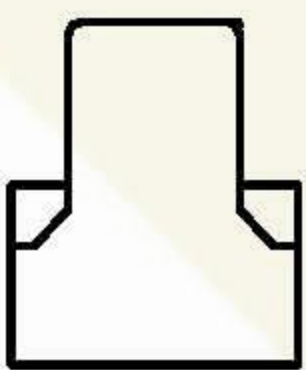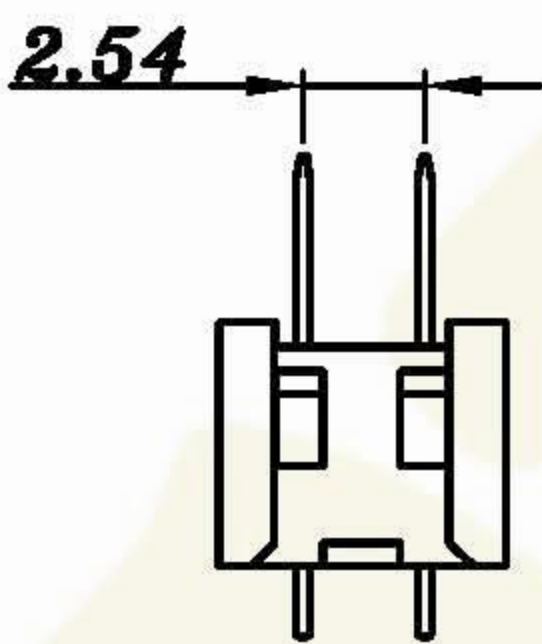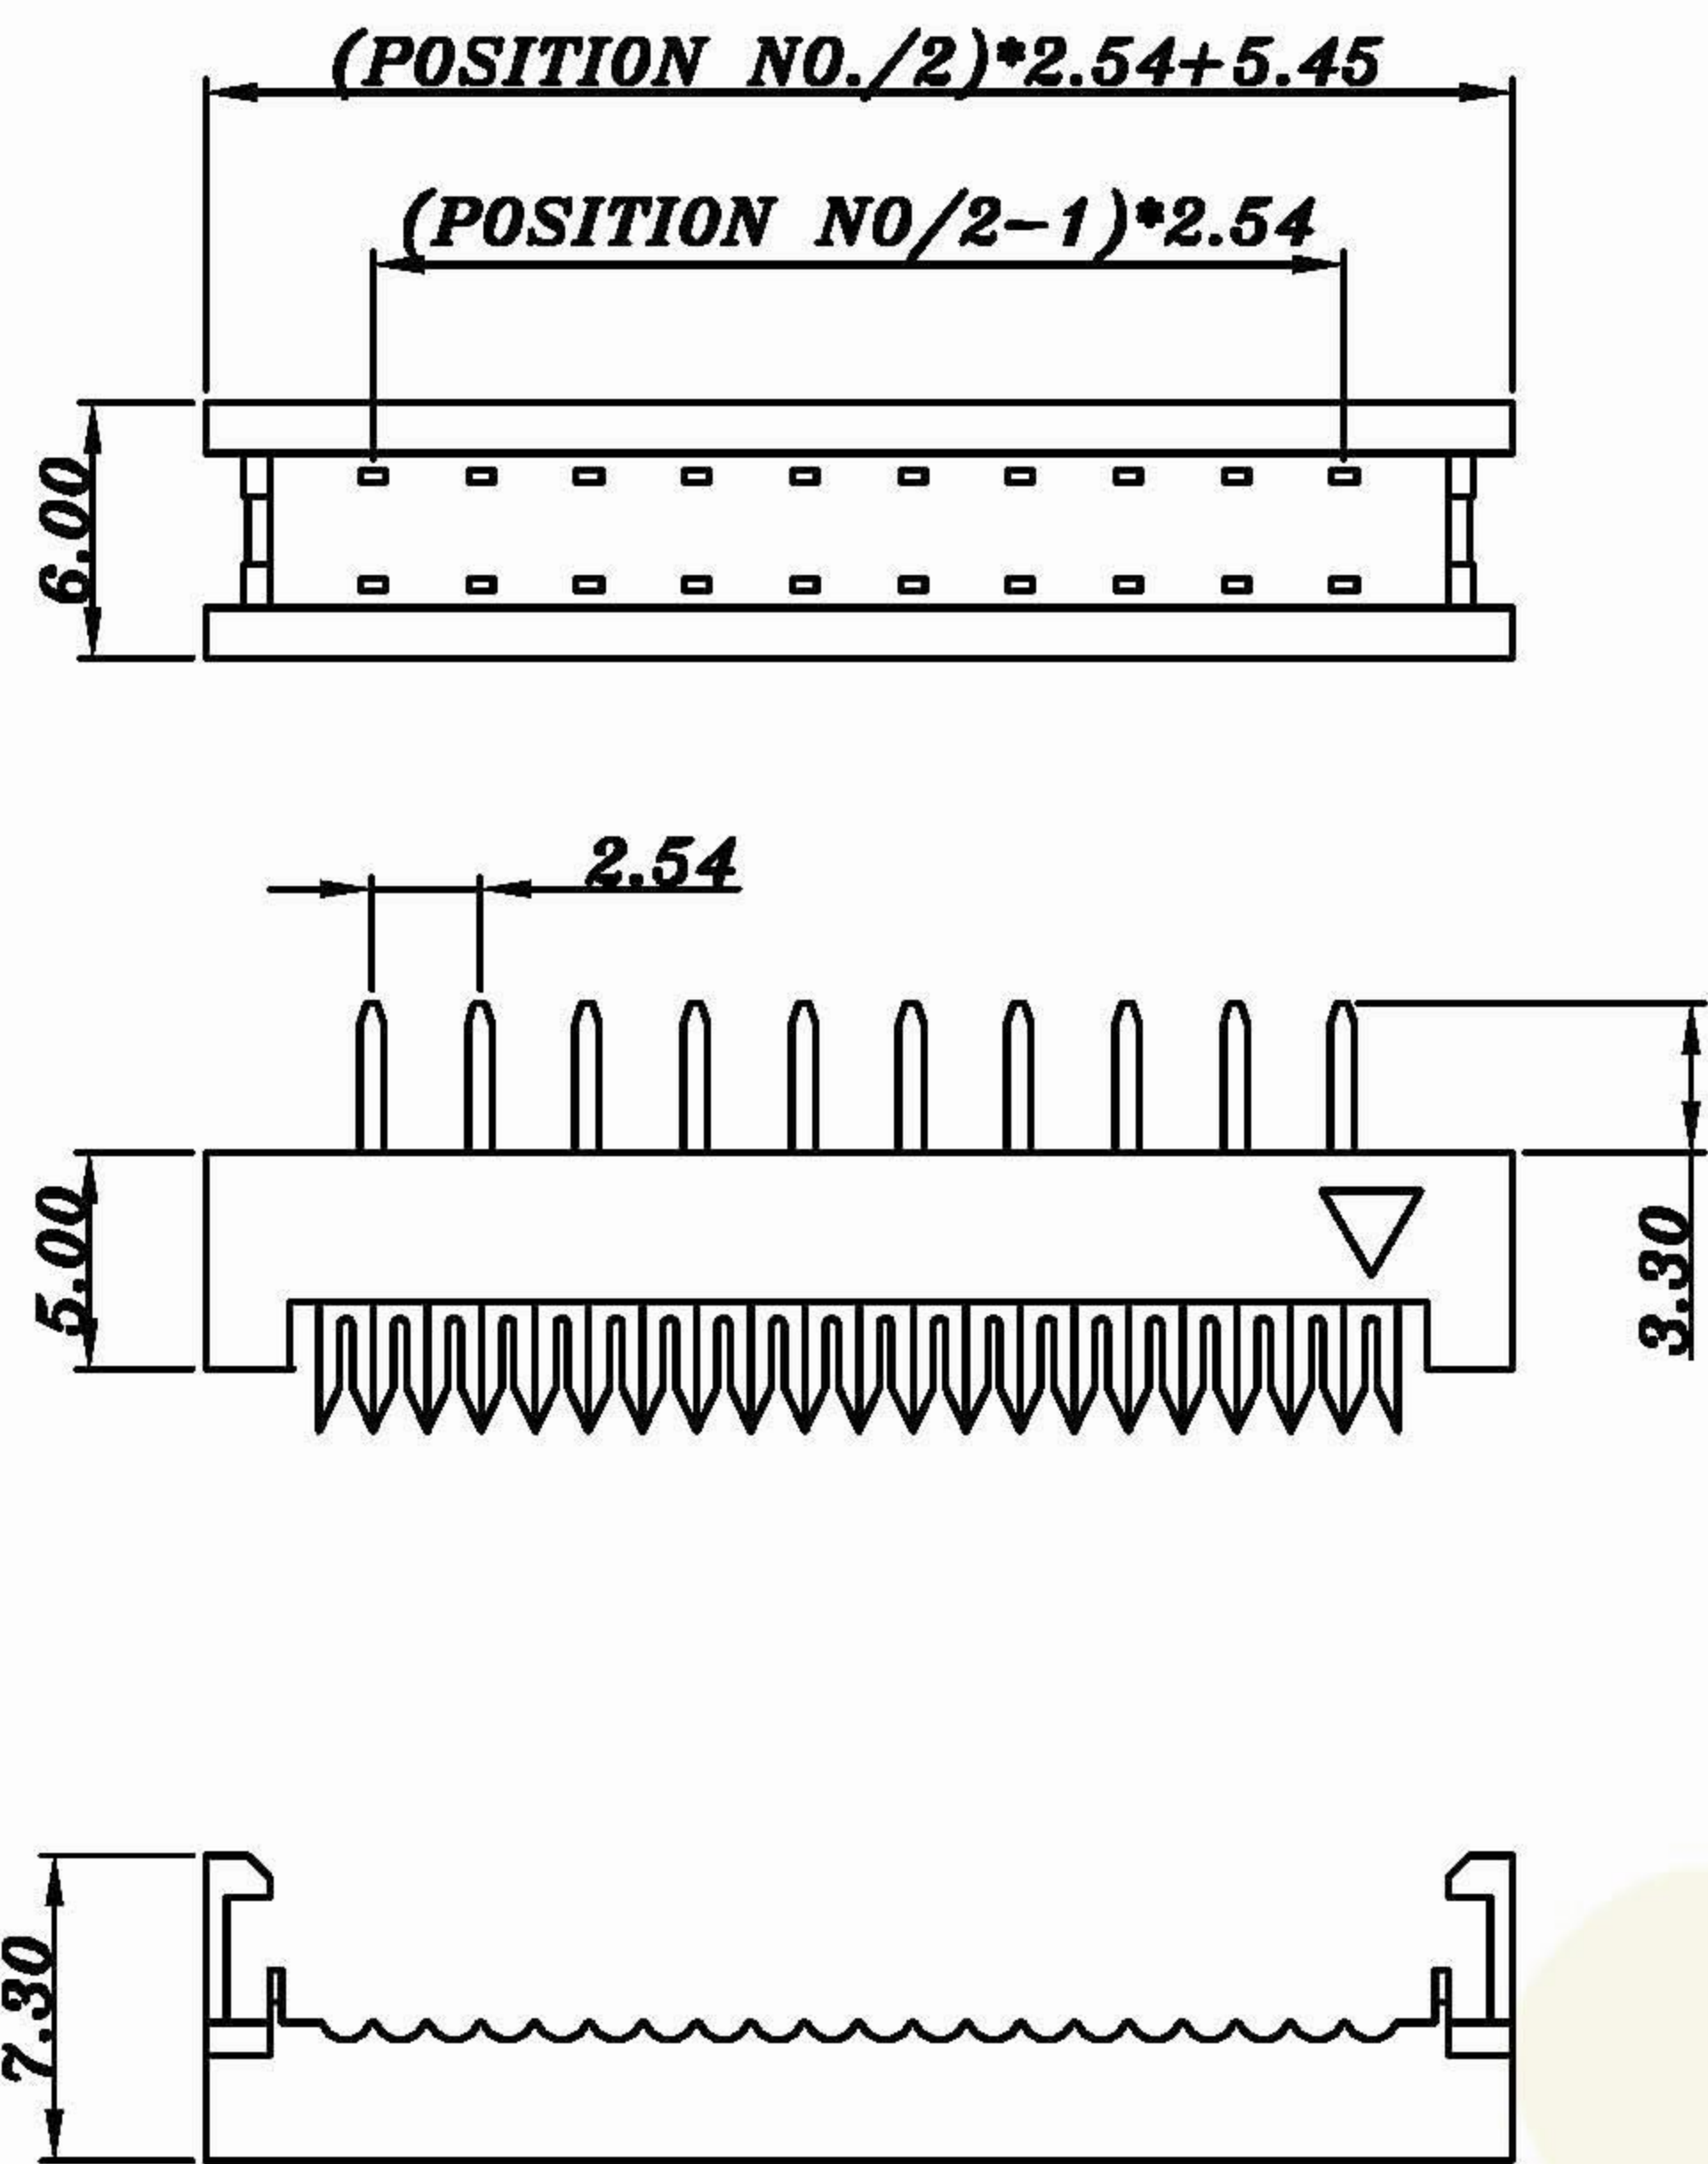

Series 306 Pins 20 Housing Color 1 Contact Material A Contact Plated S RoHS R
6-64
1:Black
A:Brass
T:Tin
G:Gold Flash
S:Selective Gold

306