

Pitch:2.0mm Female Headers Vertical Type For PCB

**Special Options Contact Our Sales Team.*




MATERIAL
Insulator:Nylon UL94V-0 Black
Contact:Copper Alloy

SPECIFICATIONS
Current Rating:1A AC,DC
Withstanding Voltage:500V AC/minute
Insulation Resistance:5000MΩ Min. at 500V DC.
Temperature Range:-40°C~+105°C

ORDER

318-2x2-S-B-G-R

Series
318 (W:4.5,H:4.3)
318B(W:4.0,H:4.3)
318C(W:4.0,H:4.0)
318M(W:4.0,H:2.3)
Pins
1x2-1x40
2x2-2x40
RoHS
Contact Plated
G:Gold Flash
Contact Material
B:Phosphor Bronze
Angle Type
S:Straight Type

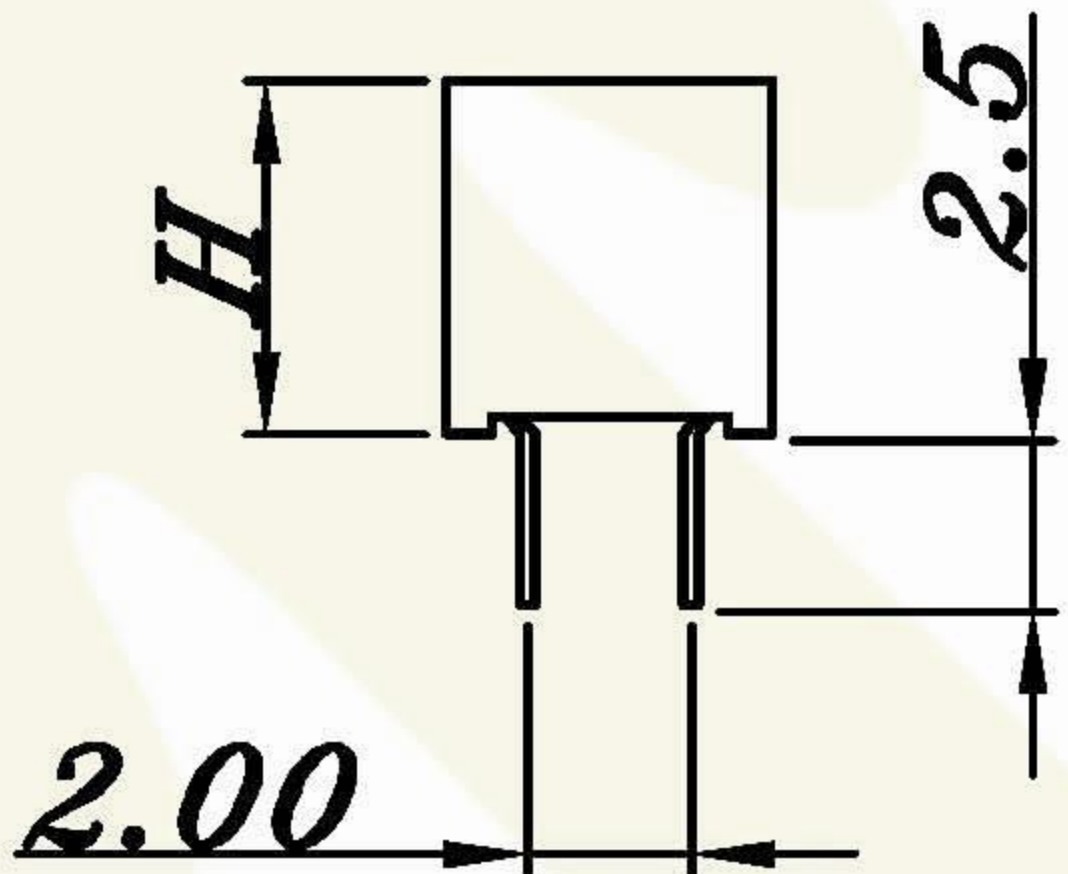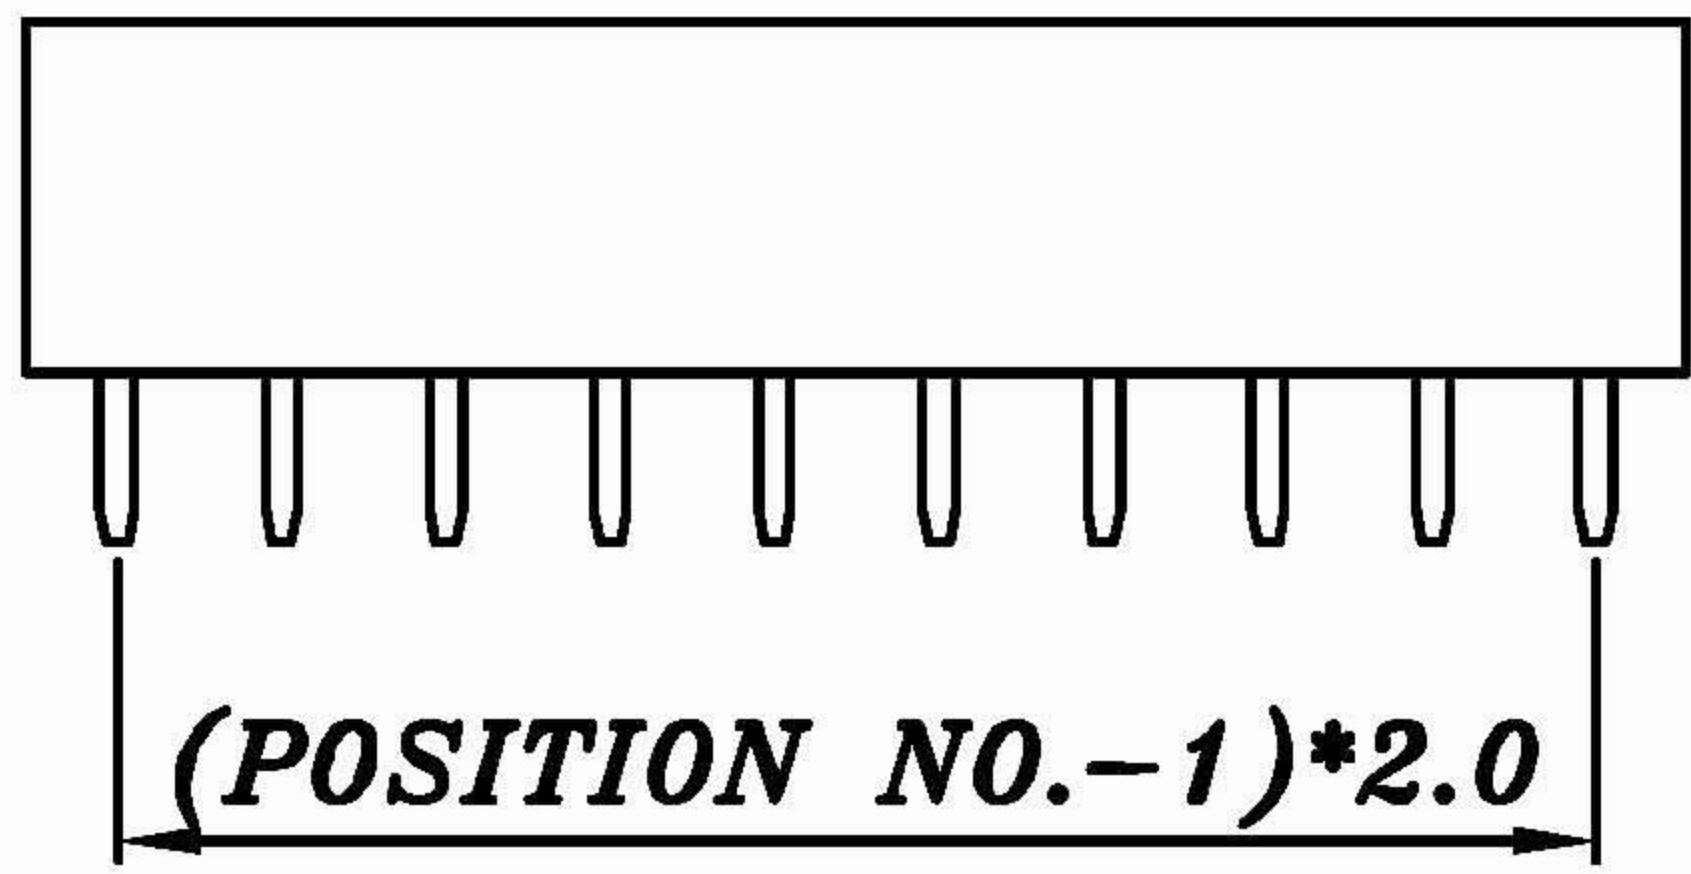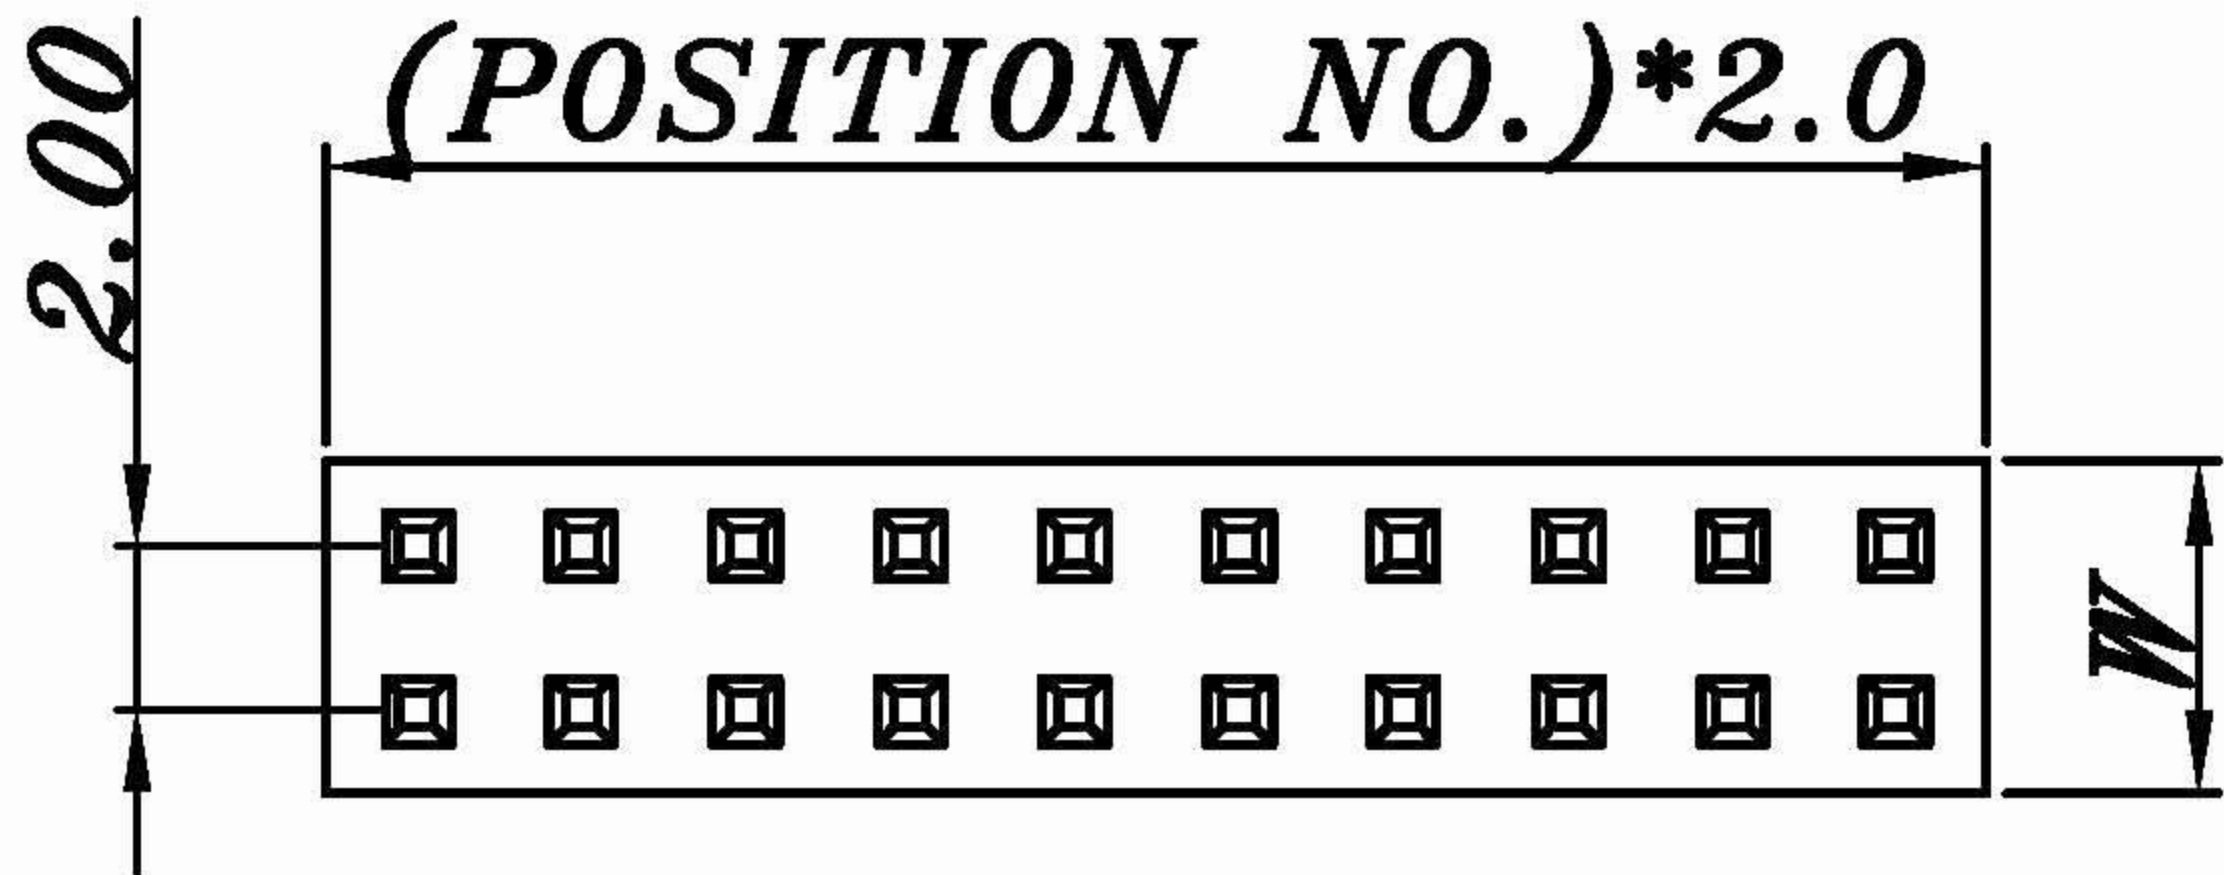

Pitch:2.0mm Female Headers Right Angle For PCB

**Special Options Contact Our Sales Team.*

MATERIAL
Insulator:Nylon UL94V-0 Black
Contact:Copper Alloy

SPECIFICATIONS
Current Rating:1A AC,DC
Withstanding Voltage:500V AC/minute
Insulation Resistance:5000MΩ Min. at 500V DC.
Temperature Range:-40°C~+105°C

ORDER

318-2x2-R-B-G-R

Series
318
Pins
2x2-2x40
RoHS
Contact Plated
G:Gold Flash
Contact Material
B:Phosphor Bronze
Angle Type
S:Right Angle

