

Pitch:2.0mm Female Headers SMD Type For PCB


**Special Options Contact Our Sales Team.*

MATERIAL




*Insulator:Nylon UL94V-0 Black
Contact:Copper Alloy*

SPECIFICATIONS



*Current Rating:1A AC,DC
Withstanding Voltage:500V AC/minute
Insulation Resistance:5000M Ω Min.
Temperature Range:-40°C~+105°C*

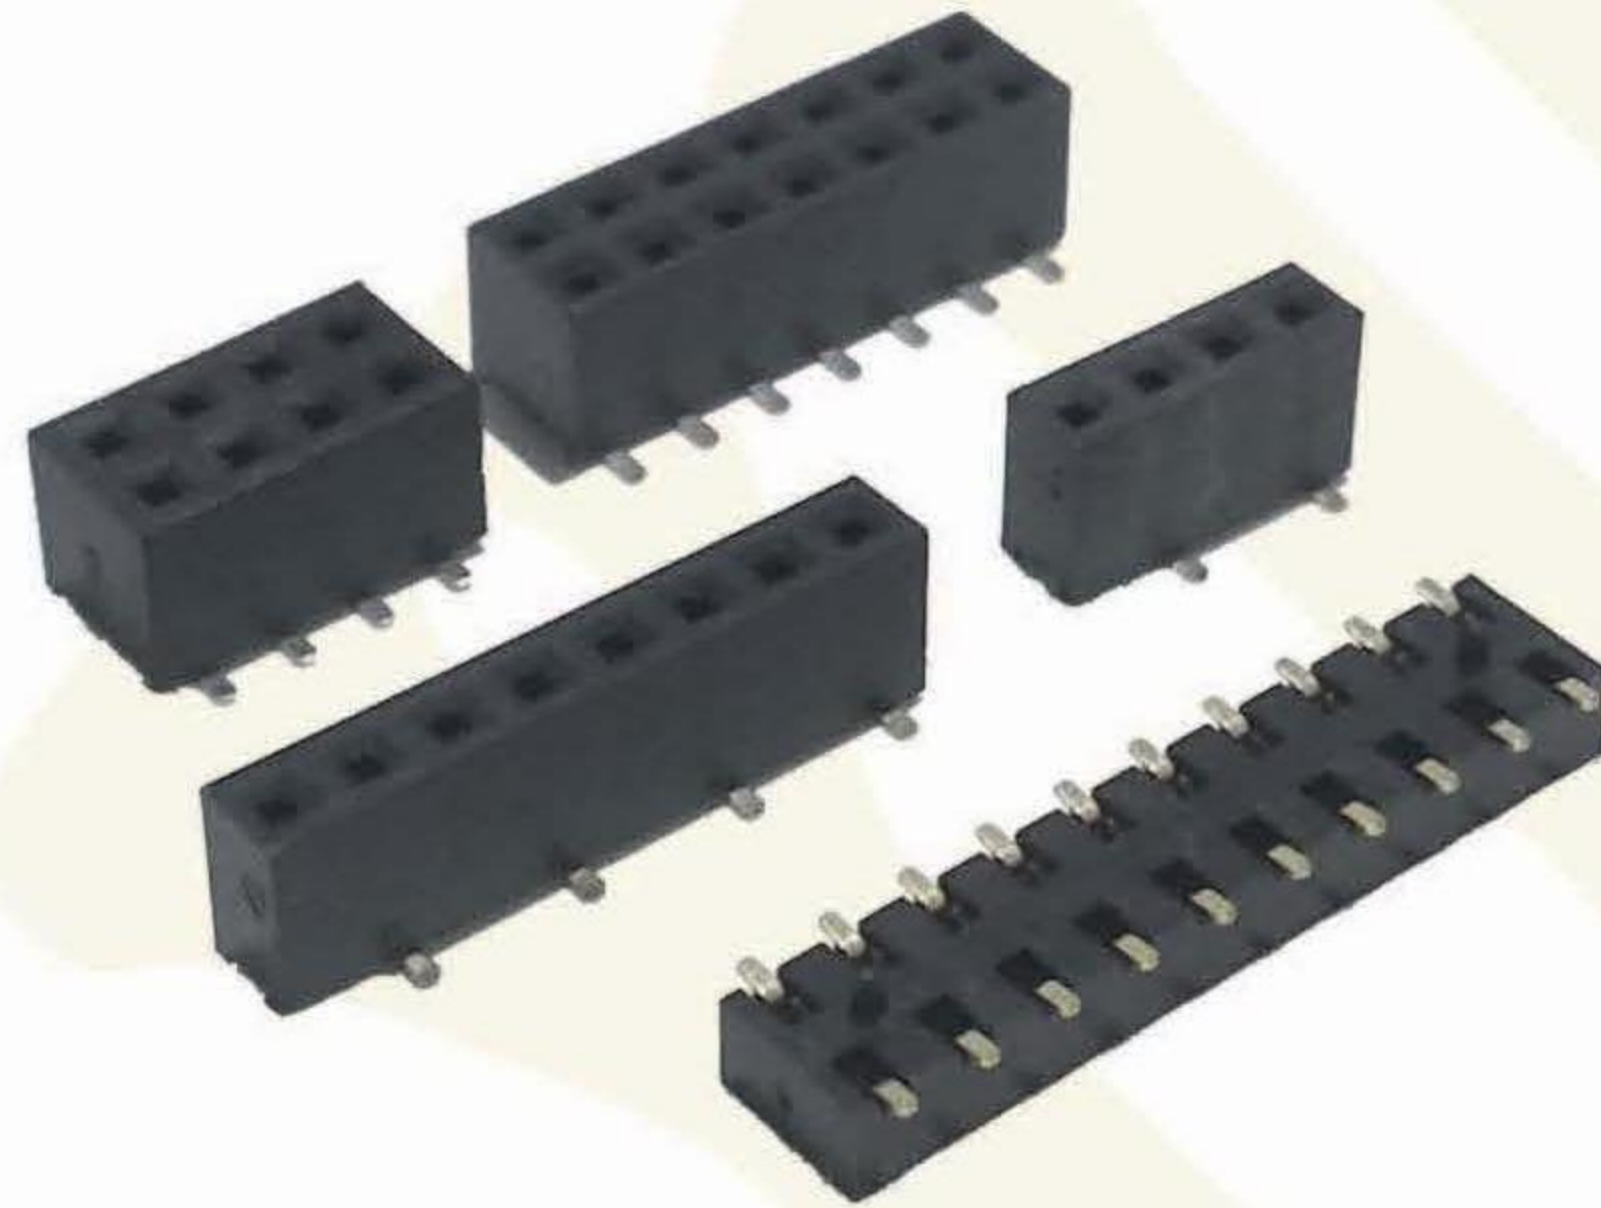

ORDER

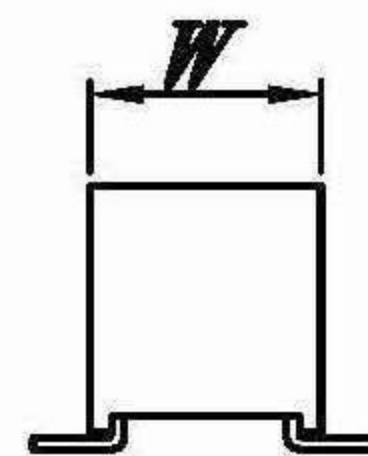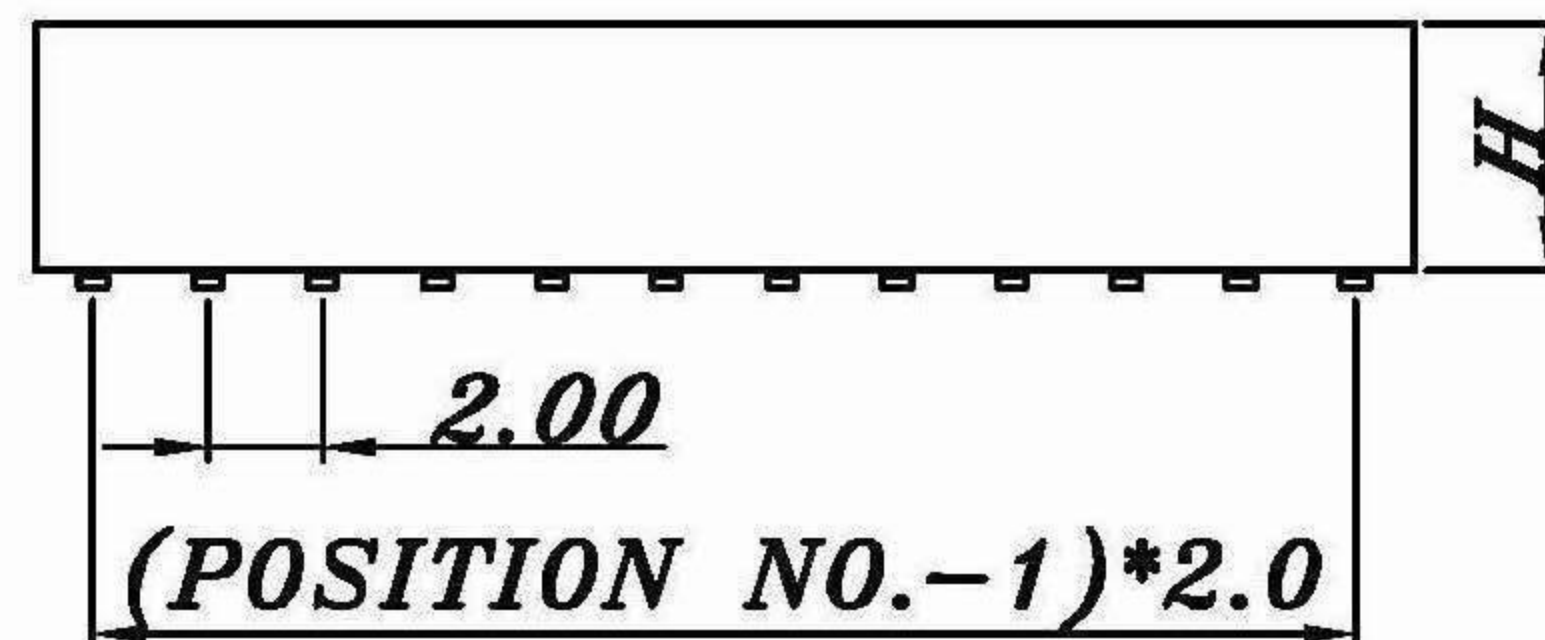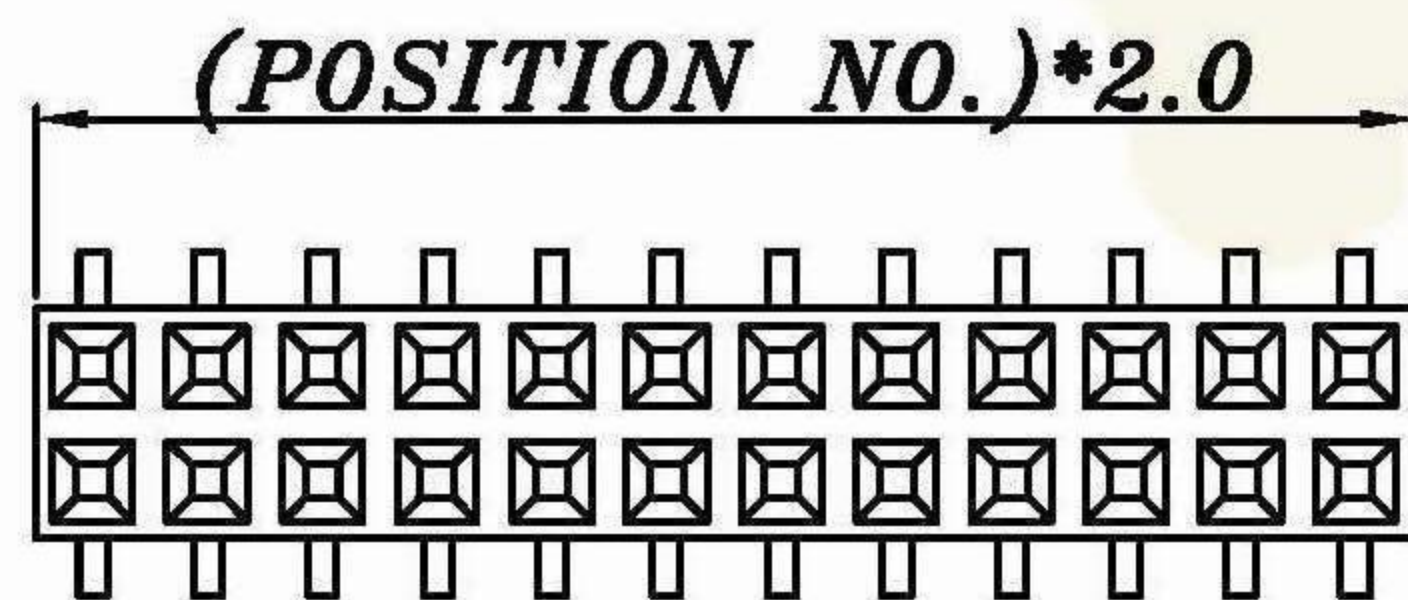

318B/318H

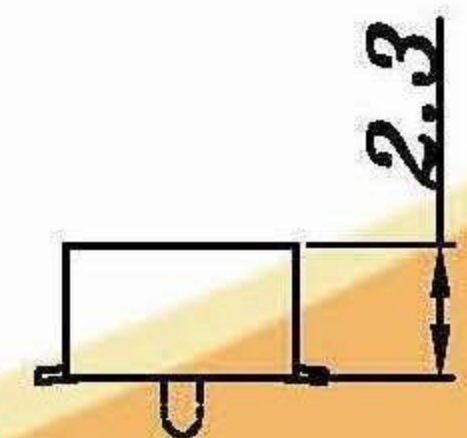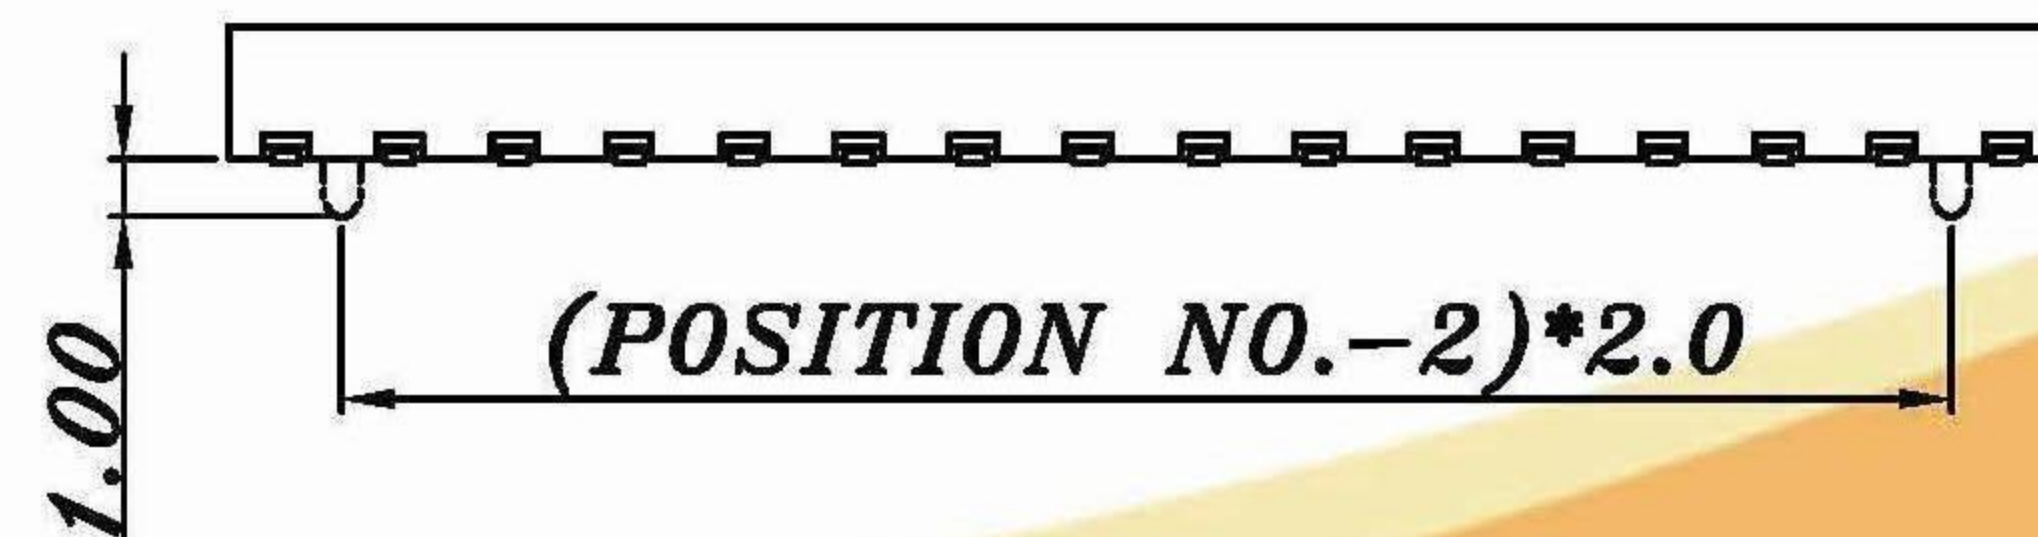

318M

318B-2x3-M-B-G-R

Series — 318B(W:4.0,H:4.3)
318H(W:4.5,H:4.3)
318M(W:4.0,H:2.3)

Pins — 1x3-1x40
2x3-2x40

RoHS — Contact Plated
G:Gold Flash

Contact Material — B:Phosphor Bronze

Angle Type — M:SMD Type

318