

Pitch:1.27mm Fully Shrouded Headers For PCB

**Special Options Contact Our Sales Team.*

MATERIAL

Insulator:LCP or Nylon UL94V-0

Contact:Copper Alloy

SPECIFICATIONS

Current Rating:1A AC,DC

Withstanding Voltage:500V AC/minute

Insulation Resistance:5000MΩ Min. at 500V DC.


Temperature Range:-40°C~+105°C

ORDER

324B-20-1-S-B-G-S-R

Series — Pins — Housing Color — Angle Type — Contact Plated — Contact Material — RoHS — Ejector Type — S:Short Latch

6-68
1:Black
S:Straight Type
R:Right Angle
M:SMD Type
G:Gold Flash
B:Phosphor Bronze

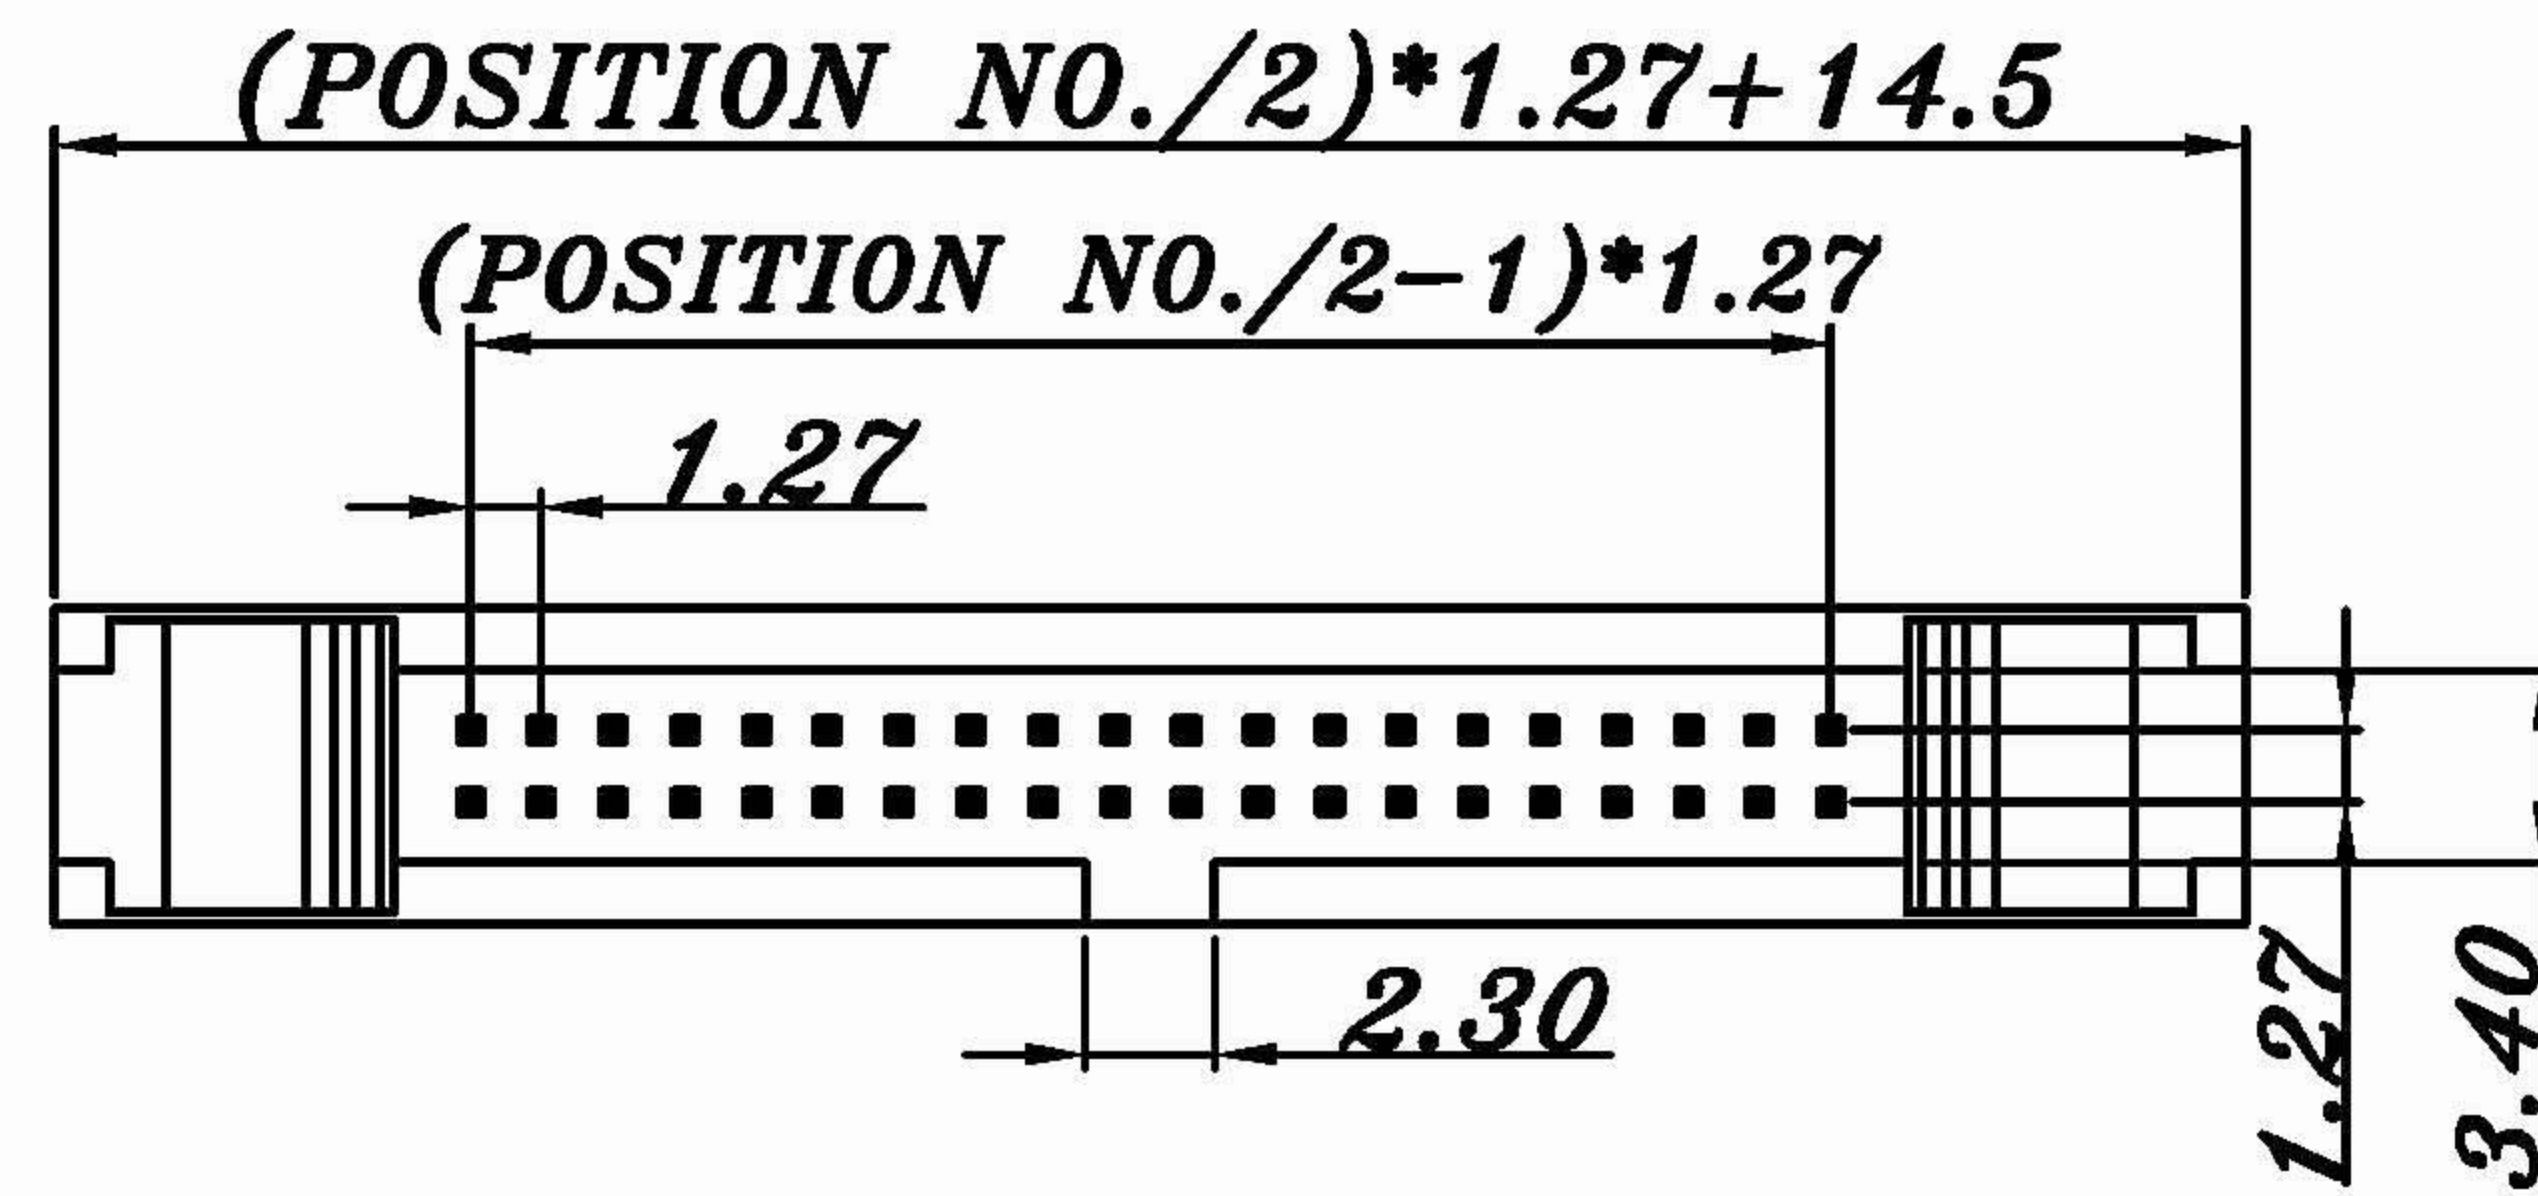

324B

