

Pitch:2.0mm IDC Socket For Ribbon Cable

**Special Options Contact Our Sales Team.*



MATERIAL

Insulator:PBT UL94V-0

Contact:Copper Alloy

SPECIFICATIONS

Current Rating:1A AC,DC

Withstanding Voltage:500V AC/minute

Insulation Resistance:1000M Ω Min.

Temperature Range:-40°C~+105°C

POSITION	POSITION
8	26
10	28
12	30
14	34
16	36
18	40
20	44
22	50
24	56






ORDER

302-20-1-A-S-A-W-R

Series — Pins — Housing Color — Contact Material — Polarization — Contact Plated — RoHS — Strain Relief

8-56 — 1:Black — A:Brass — N:None — T:Tin — W:With S/R — N:Without S/R

4:Gray — B:Short — S:Selective Gold

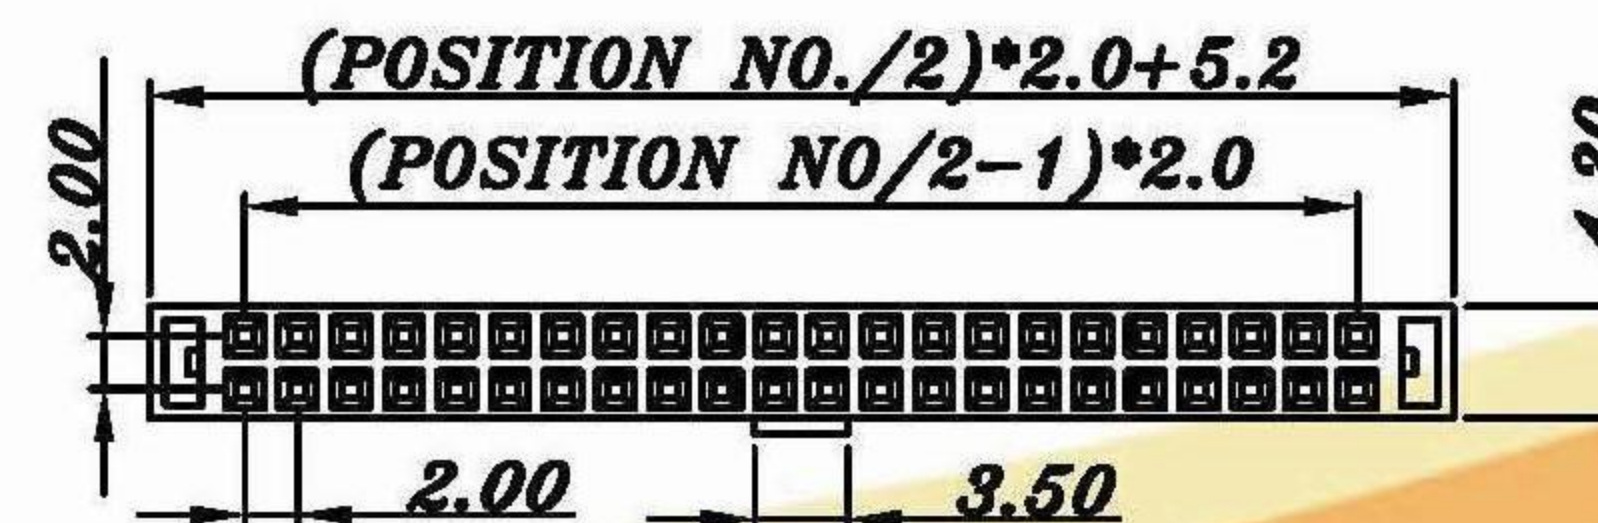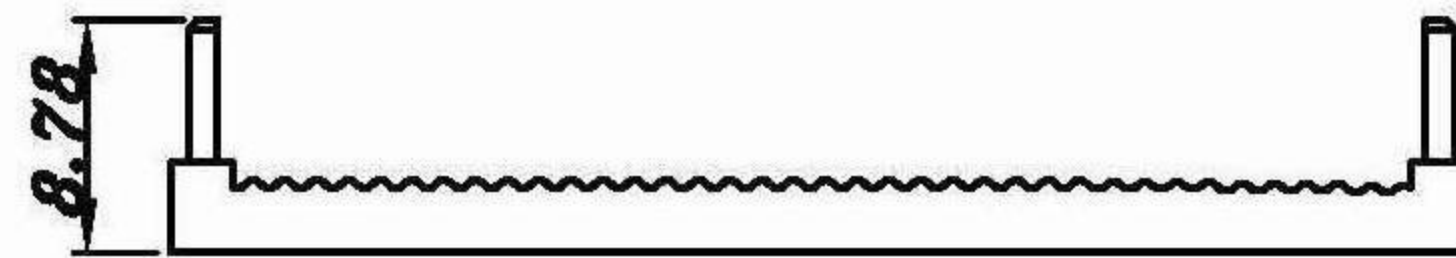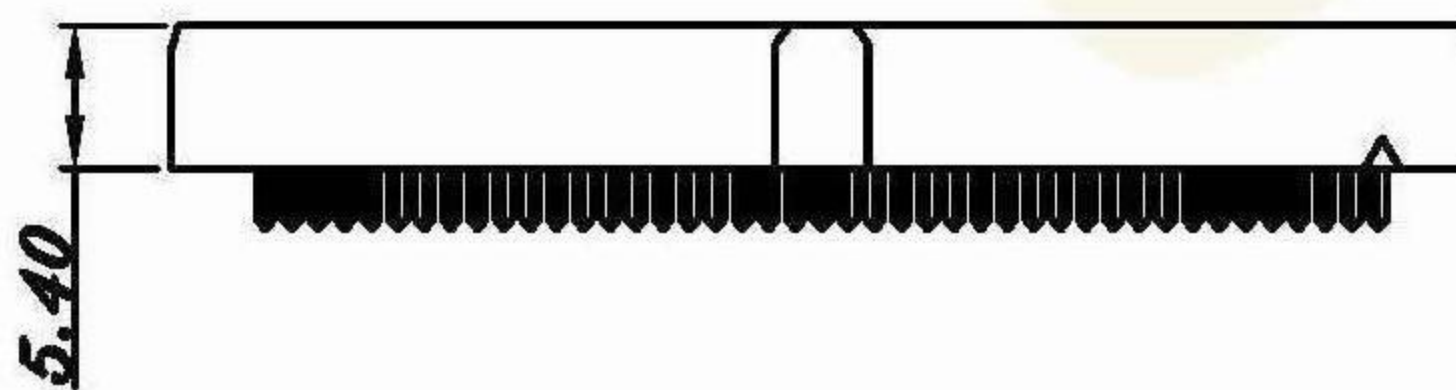

302