

Pitch:2.54mm IDC Socket For Ribbon Cable

**Special Options Contact Our Sales Team.*



MATERIAL

Insulator:PBT UL94V-0

Contact:Copper Alloy

SPECIFICATIONS

Current Rating:1A AC,DC

Withstanding Voltage:300V AC/minute

Insulation Resistance:1000MΩ Min.



Temperature Range:-40°C~+105°C

POSITION	POSITION
6	34
8	36
10	40
12	44
14	50
16	56
20	60
24	62
26	64
30	

ORDER

301-20-1-A-S-N-W-R
 Series **301** Pins **20** Housing Color **1** Contact Material **A** Polarization **S** Contact Plated **T** Strain Relief **N** Without S/R **W** With S/R **R** RoHS

6-64
 1:Black
 4:Gray
 A:Brass
 N:None
 A:Standard
 B:Short
 T:Tin
 G:Gold Flash
 S:Selective Gold

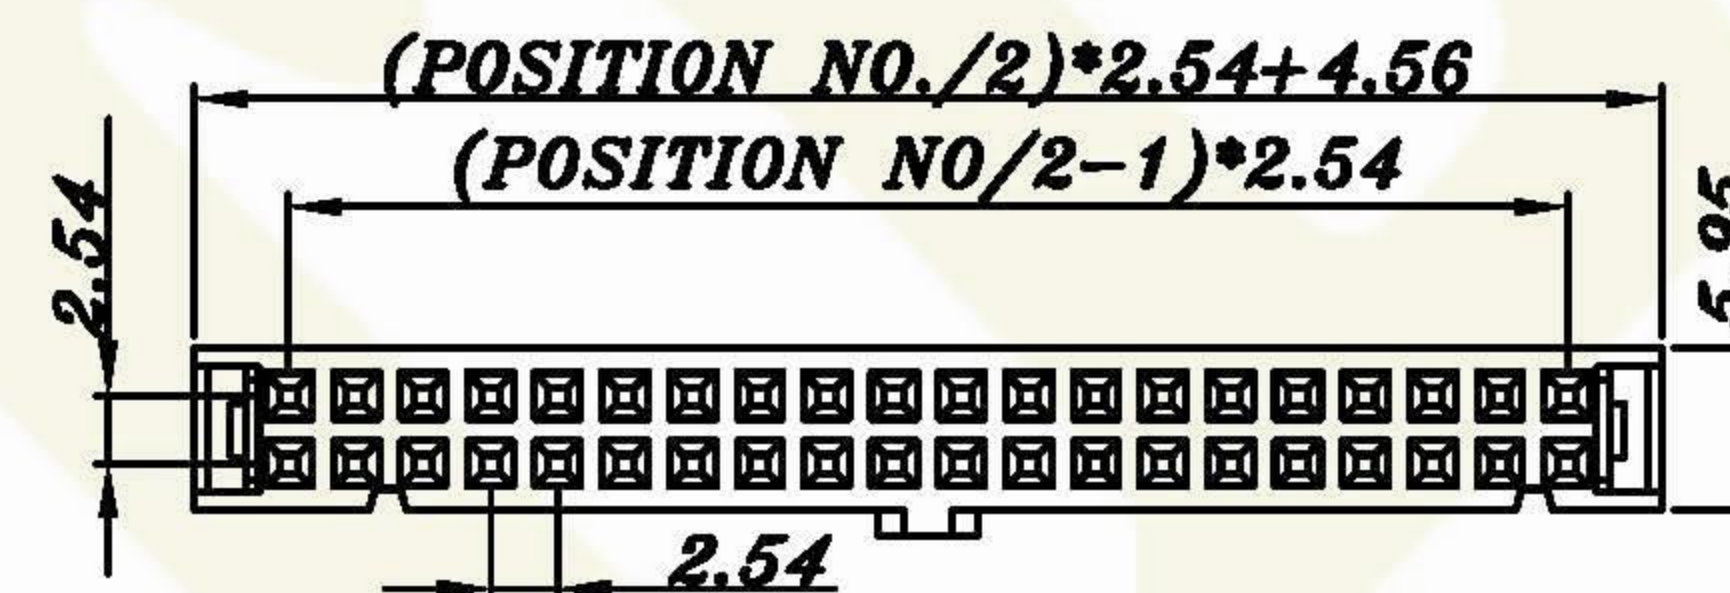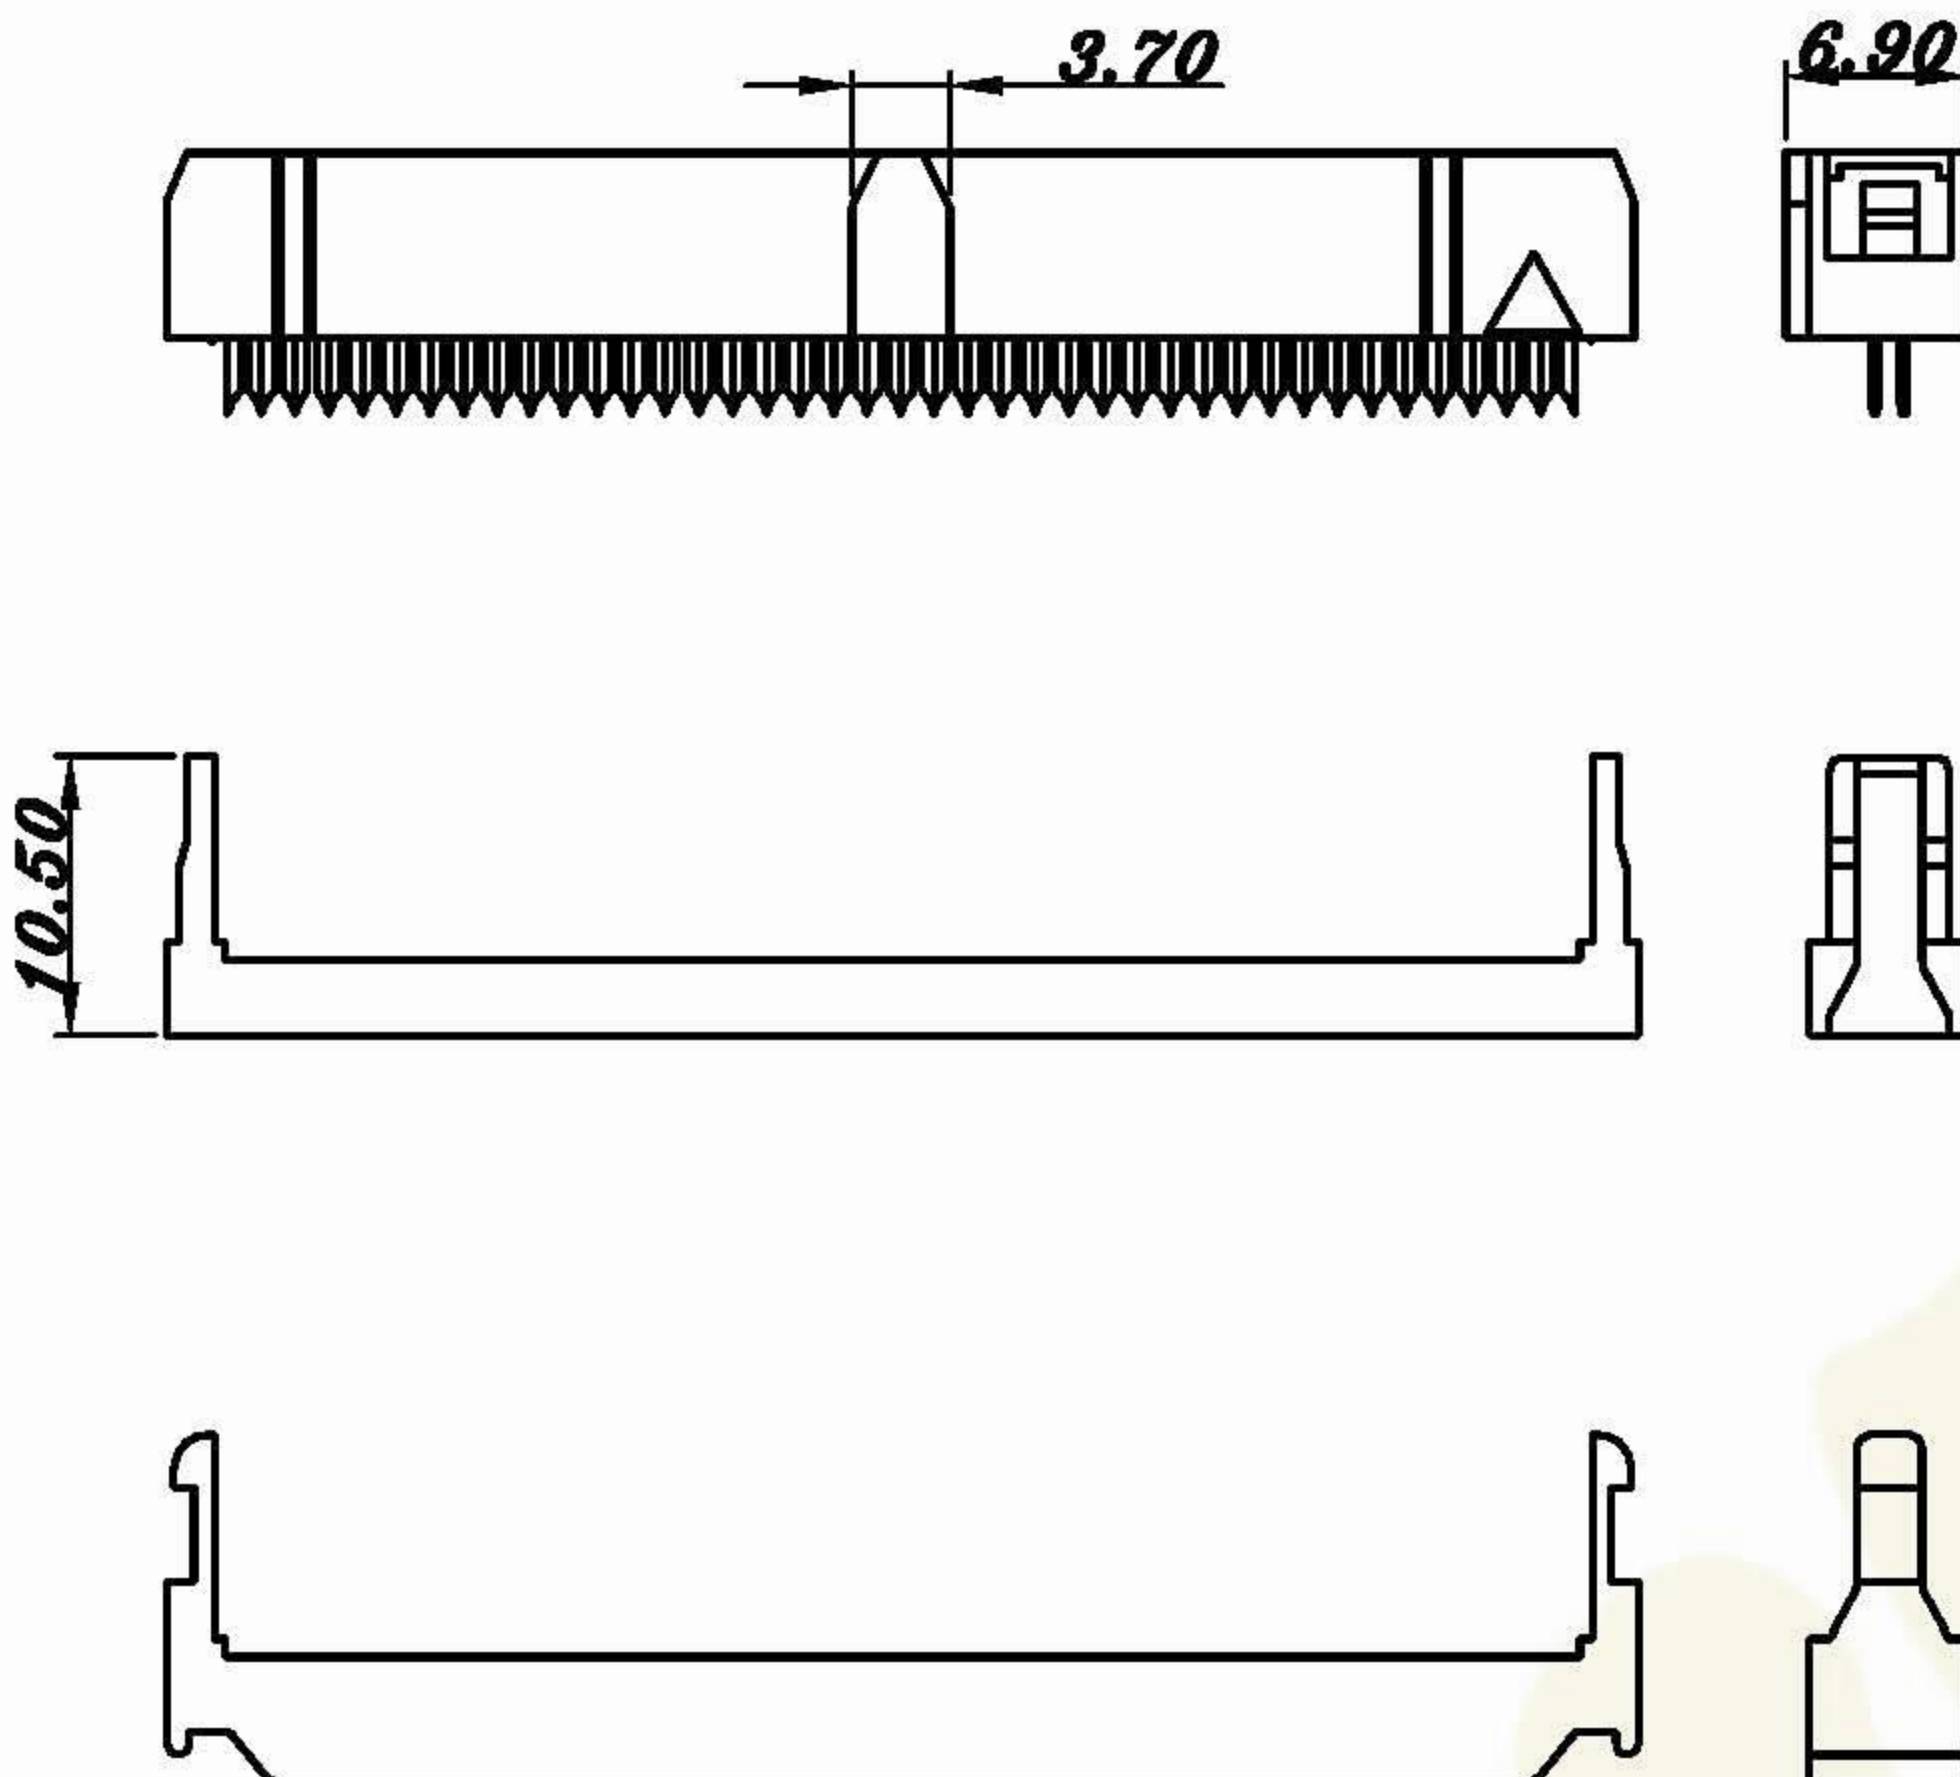

301