

Pitch:1.27x2.54mm IDC Socket For Ribbon Cable



MATERIAL
 Insulator:PBT UL94V-0
 Contact:Copper Alloy








**Special Options Contact Our Sales Team.*

SPECIFICATIONS
 Current Rating:1A AC,DC
 Withstanding Voltage:500V AC/minute
 Insulation Resistance:500MΩ Min.
 Temperature Range:-40°C~+85°C

POSITION	POSITION
10	40
14	44
16	50
20	60
22	68
26	80
30	100
34	

ORDER

303-20-1-B-S-R
 Series — Pins — Housing Color — Contact Material — Contact Plated — RoHS
 10-100 — 1:Black — A:Brass — T: Tin — G:Gold Flash — S:Selective Gold
 B:Phosphor Bronze

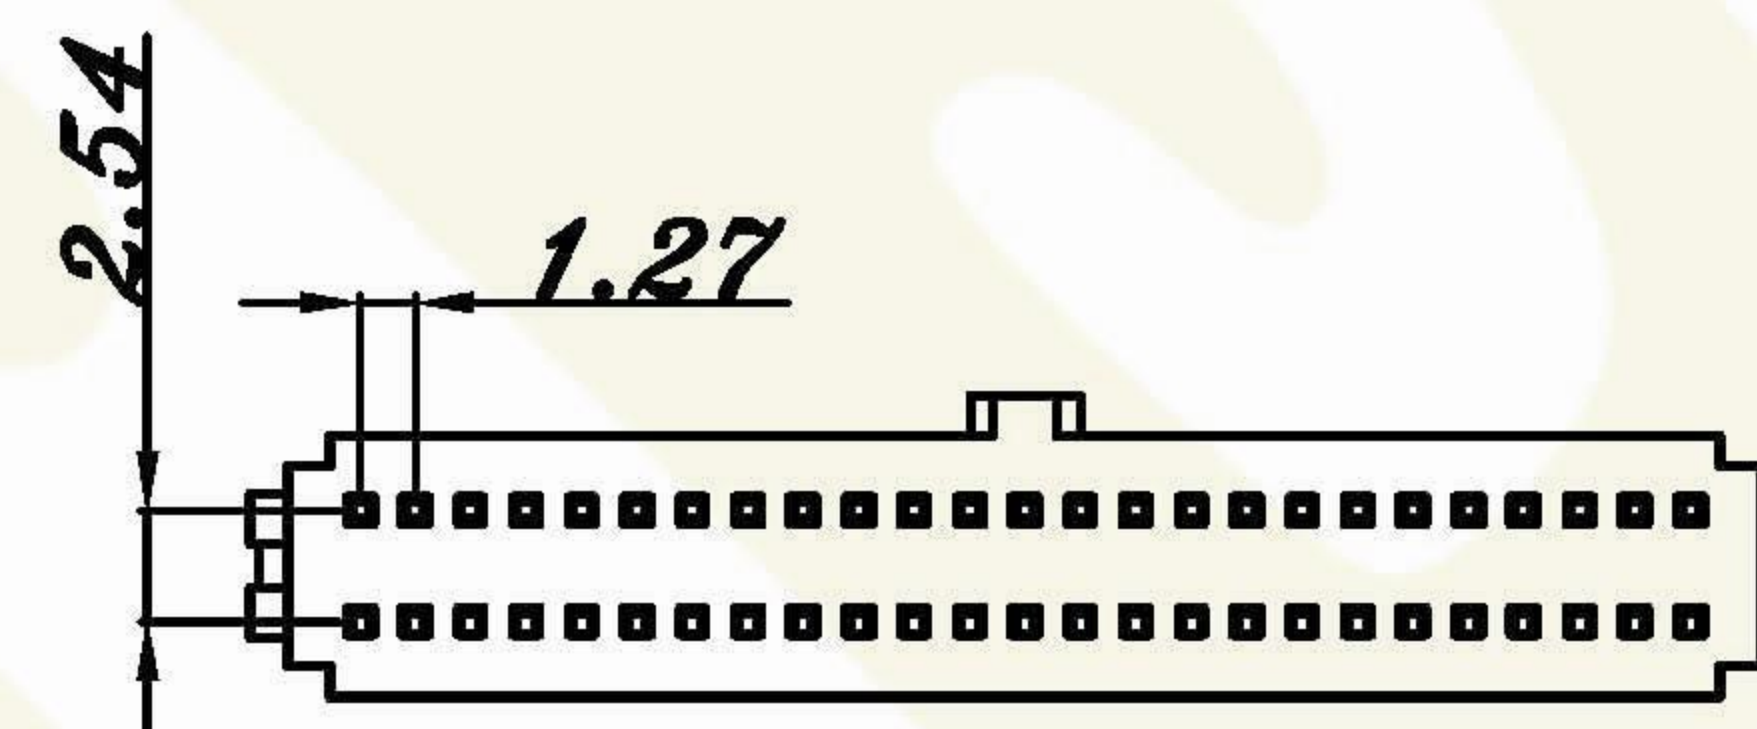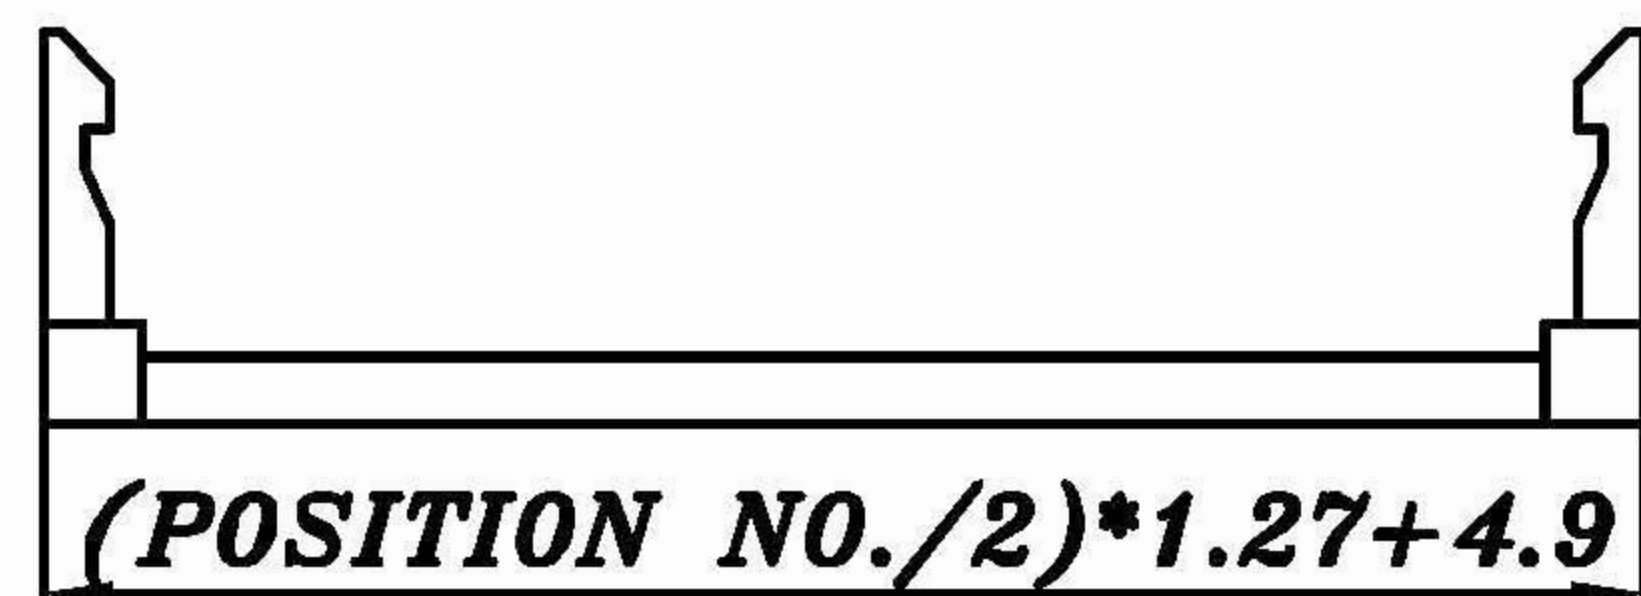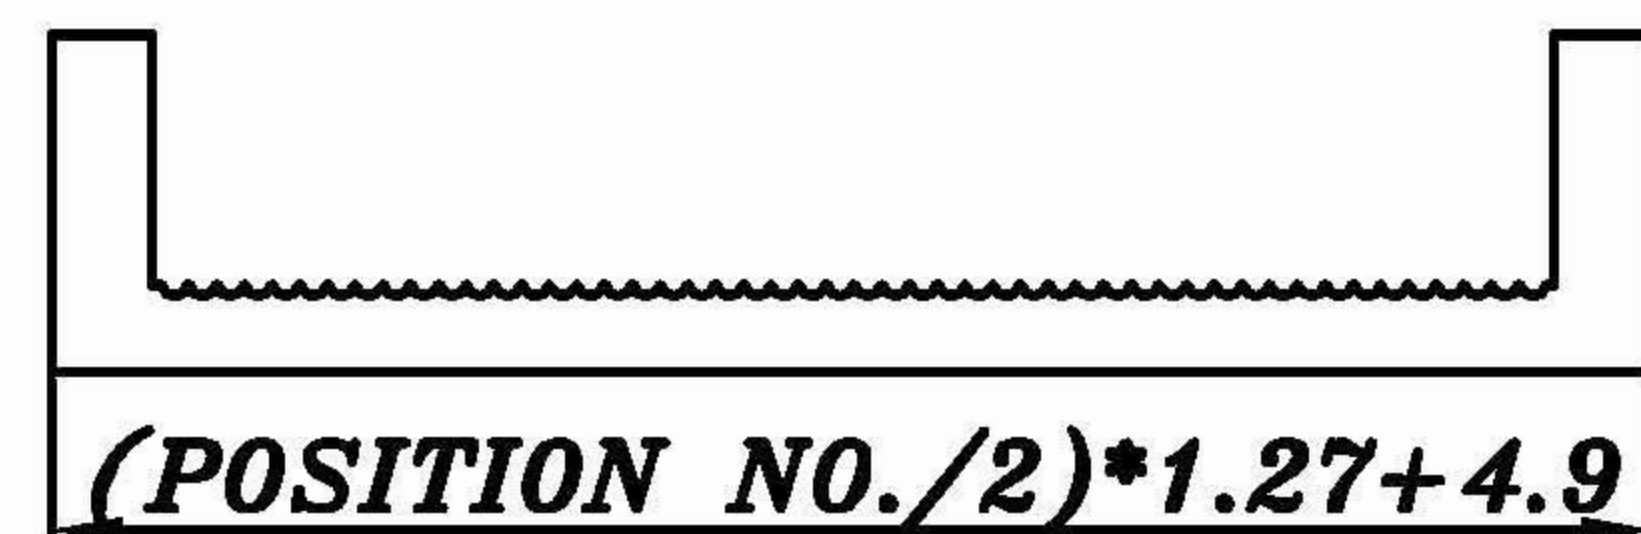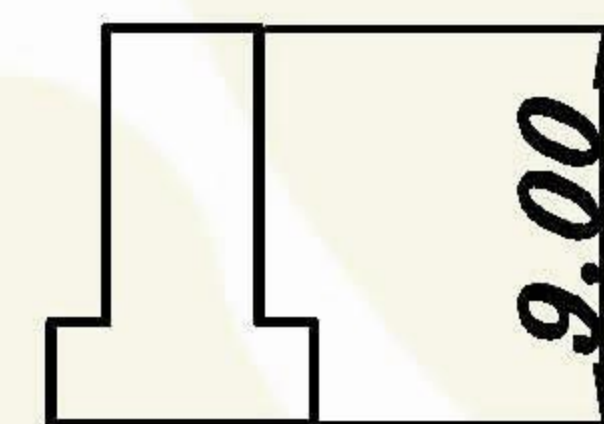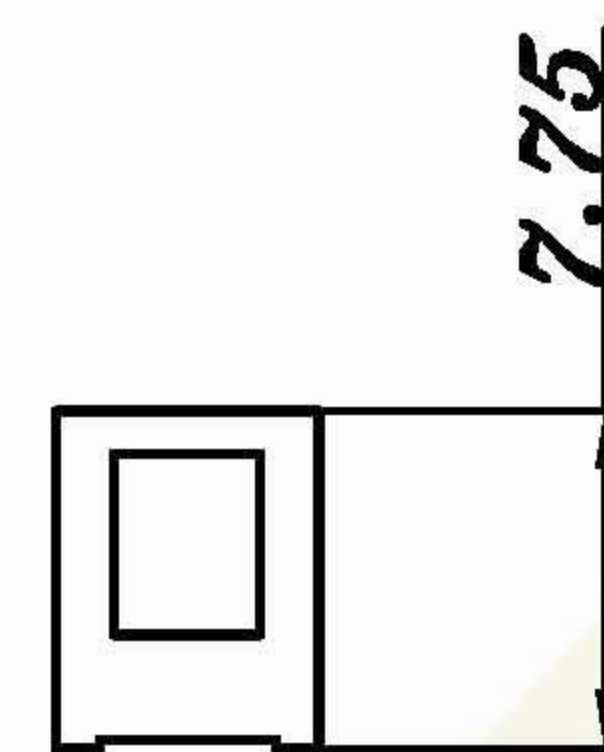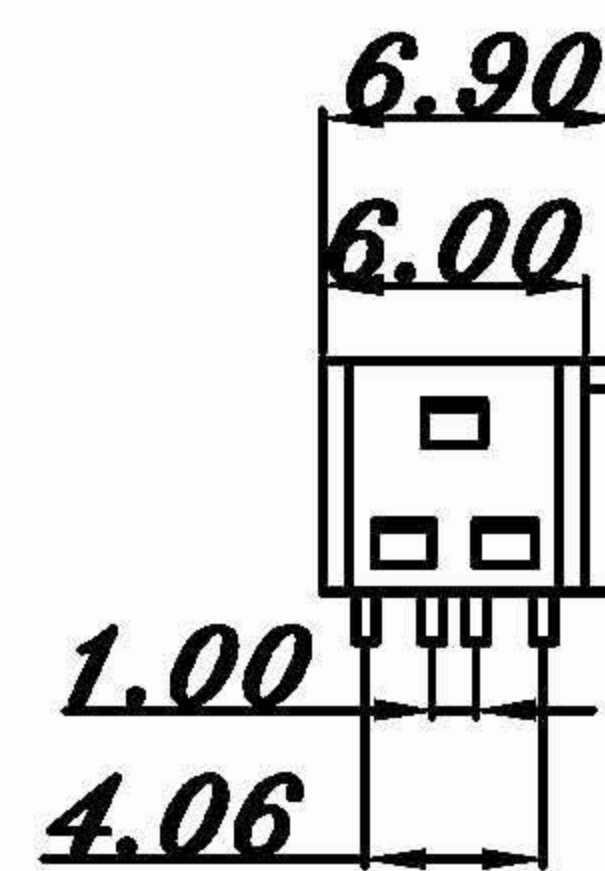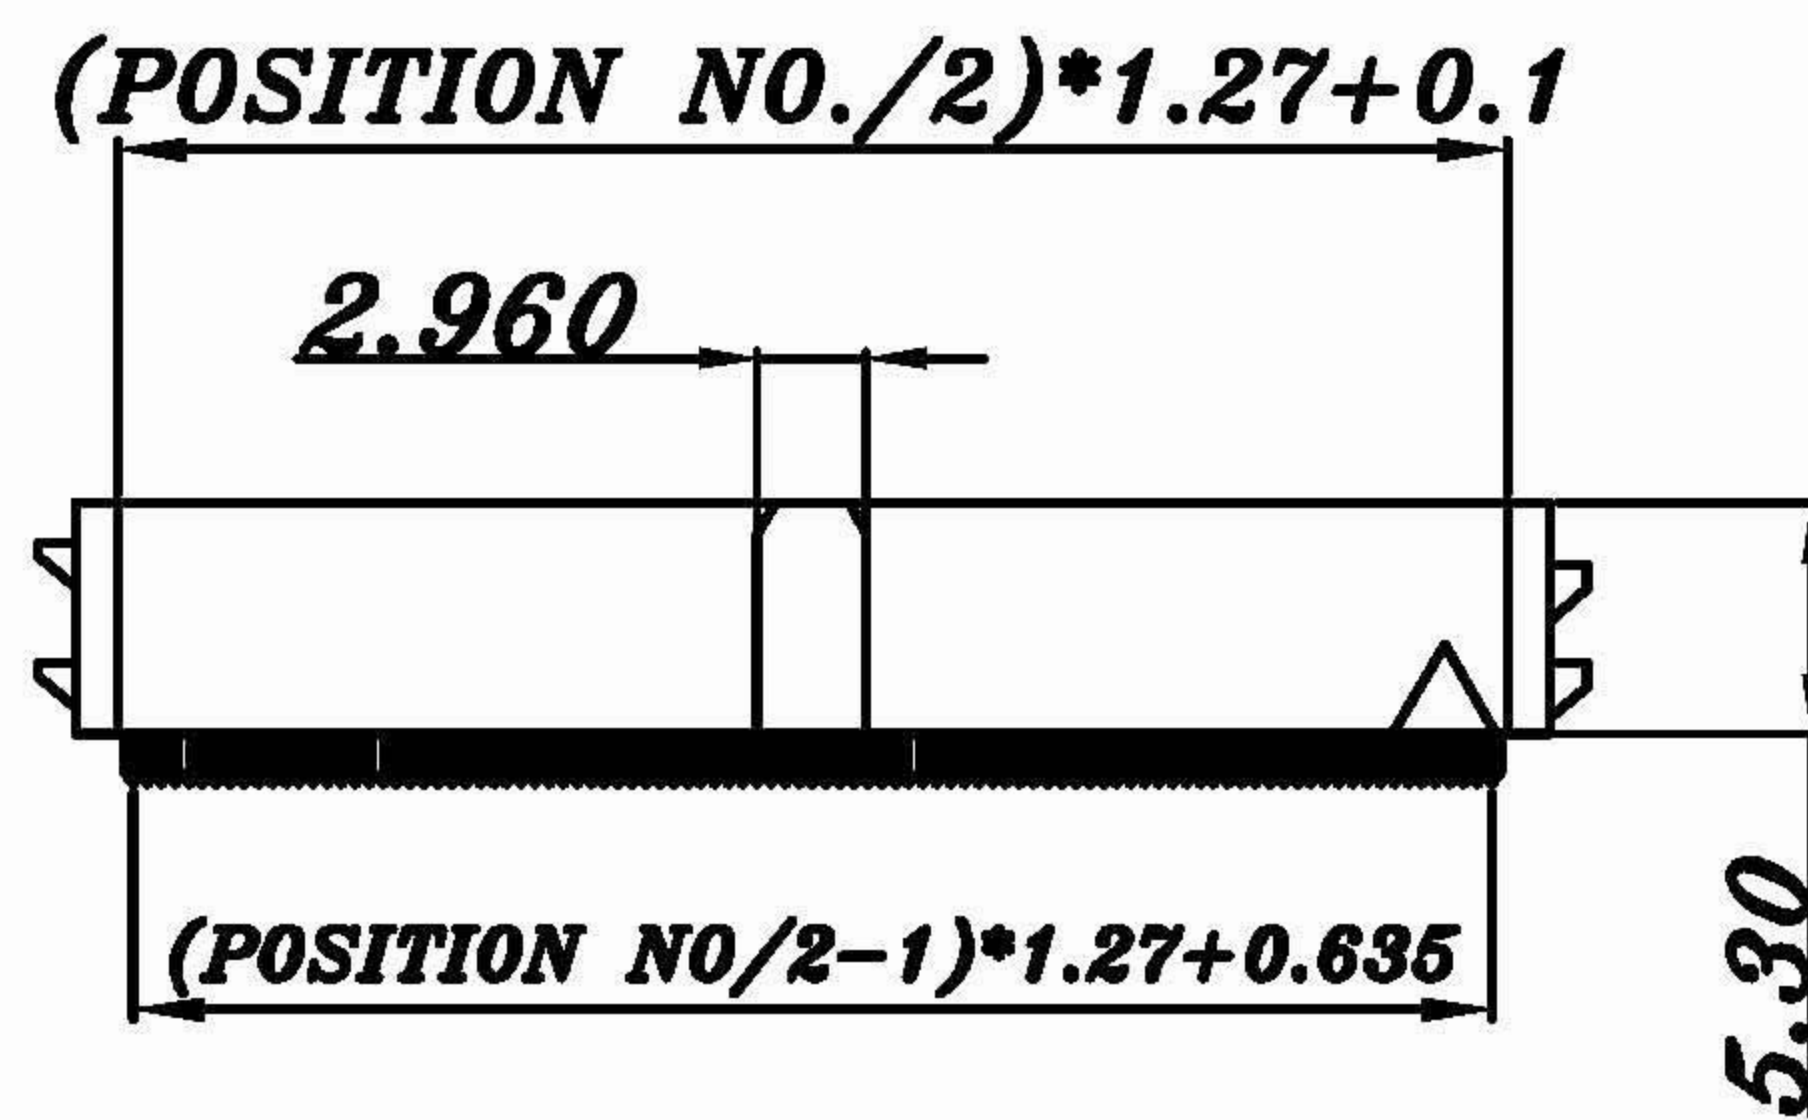

303