

Pitch:1.27x1.27mm IDC Socket For Ribbon Cable

**Special Options Contact Our Sales Team.*

MATERIAL

Insulator:PBT UL94V-0

Contact:Copper Alloy

SPECIFICATIONS

Current Rating:1A AC,DC

Withstanding Voltage:500V AC/minute

Insulation Resistance:100MΩ Min.

Temperature Range:-40°C~+105°C

POSITION	POSITION
6	30
8	34
10	40
12	44
14	50
16	52
18	60
20	64
26	80
28	

ORDER

303A-20-1-B-S-A-N-R

Series

Pins

6-80

Housing Color

1:Black

Contact Material

A:Brass

B:Phosphor Bronze

RoHS

Strain Relief

W:With S/R

N:Without S/R

Polarization

N:None







A:Standard

Contact Plated

T:Tin

G:Gold Flash

S:Selective Gold

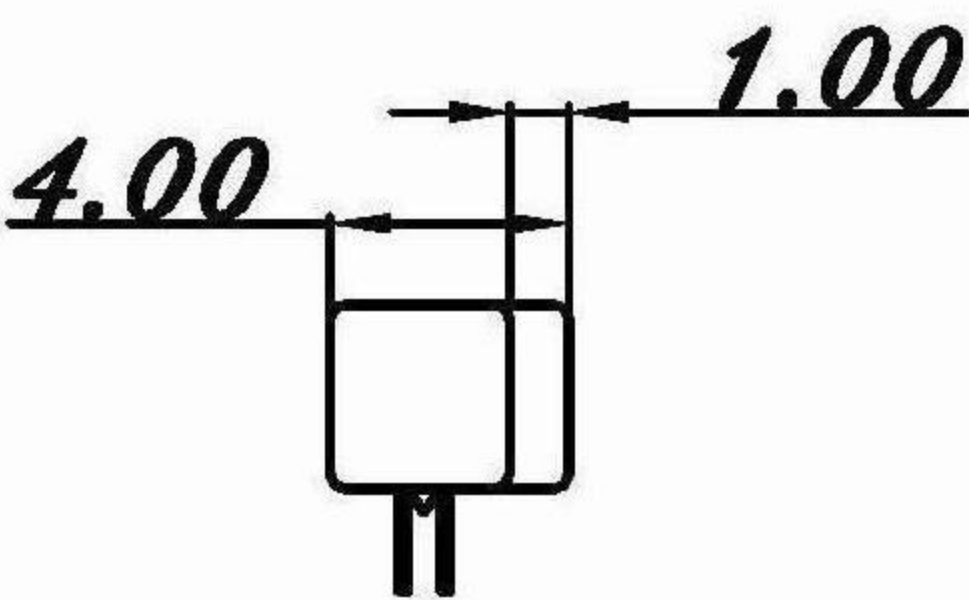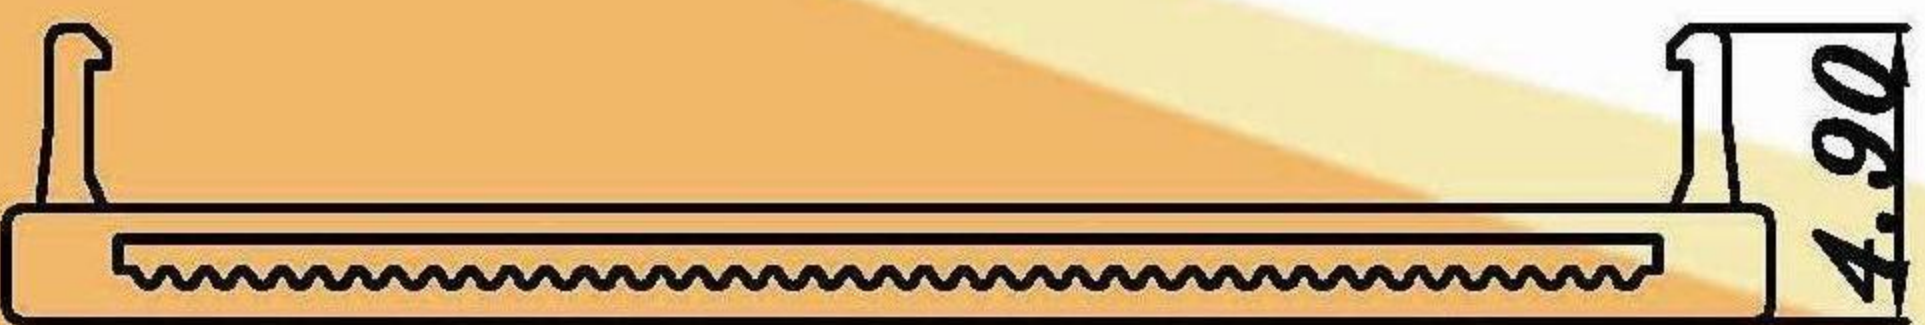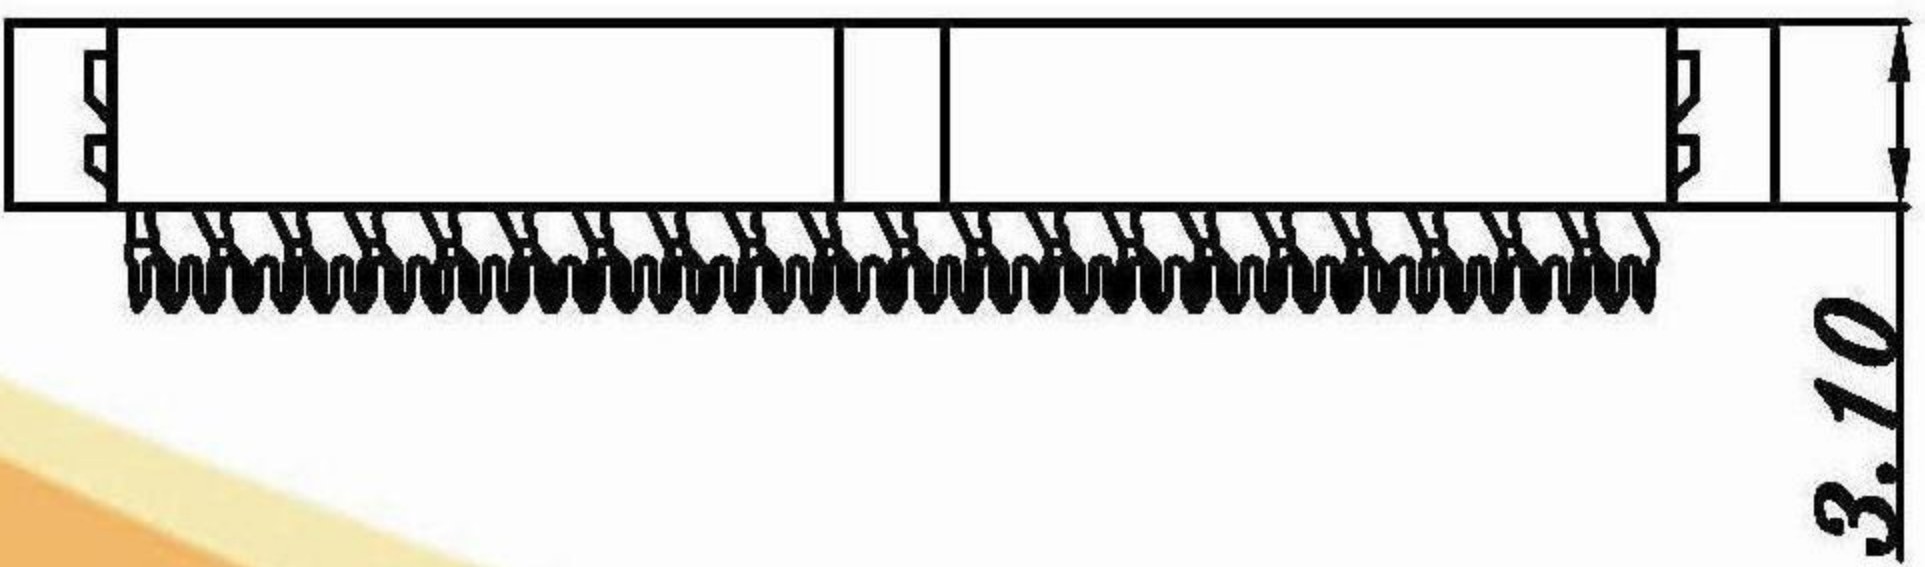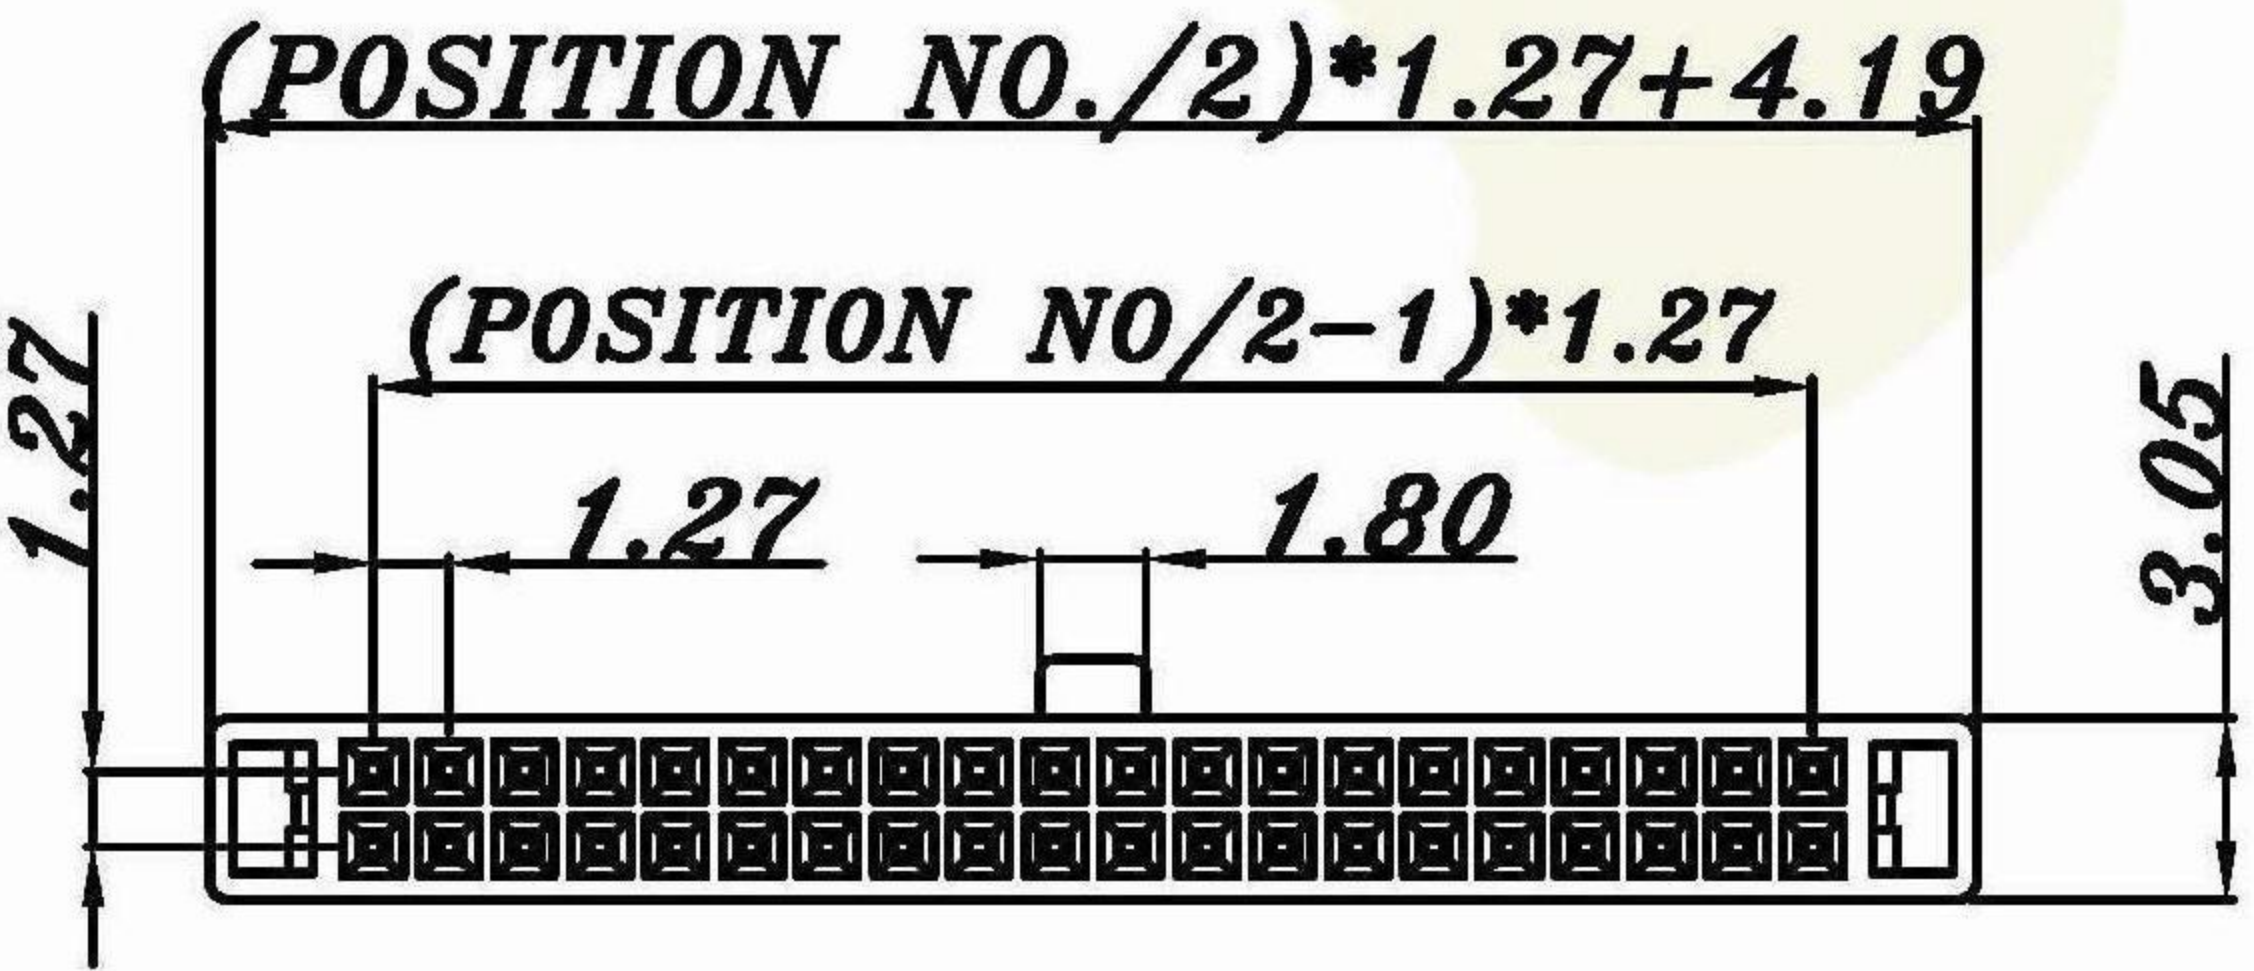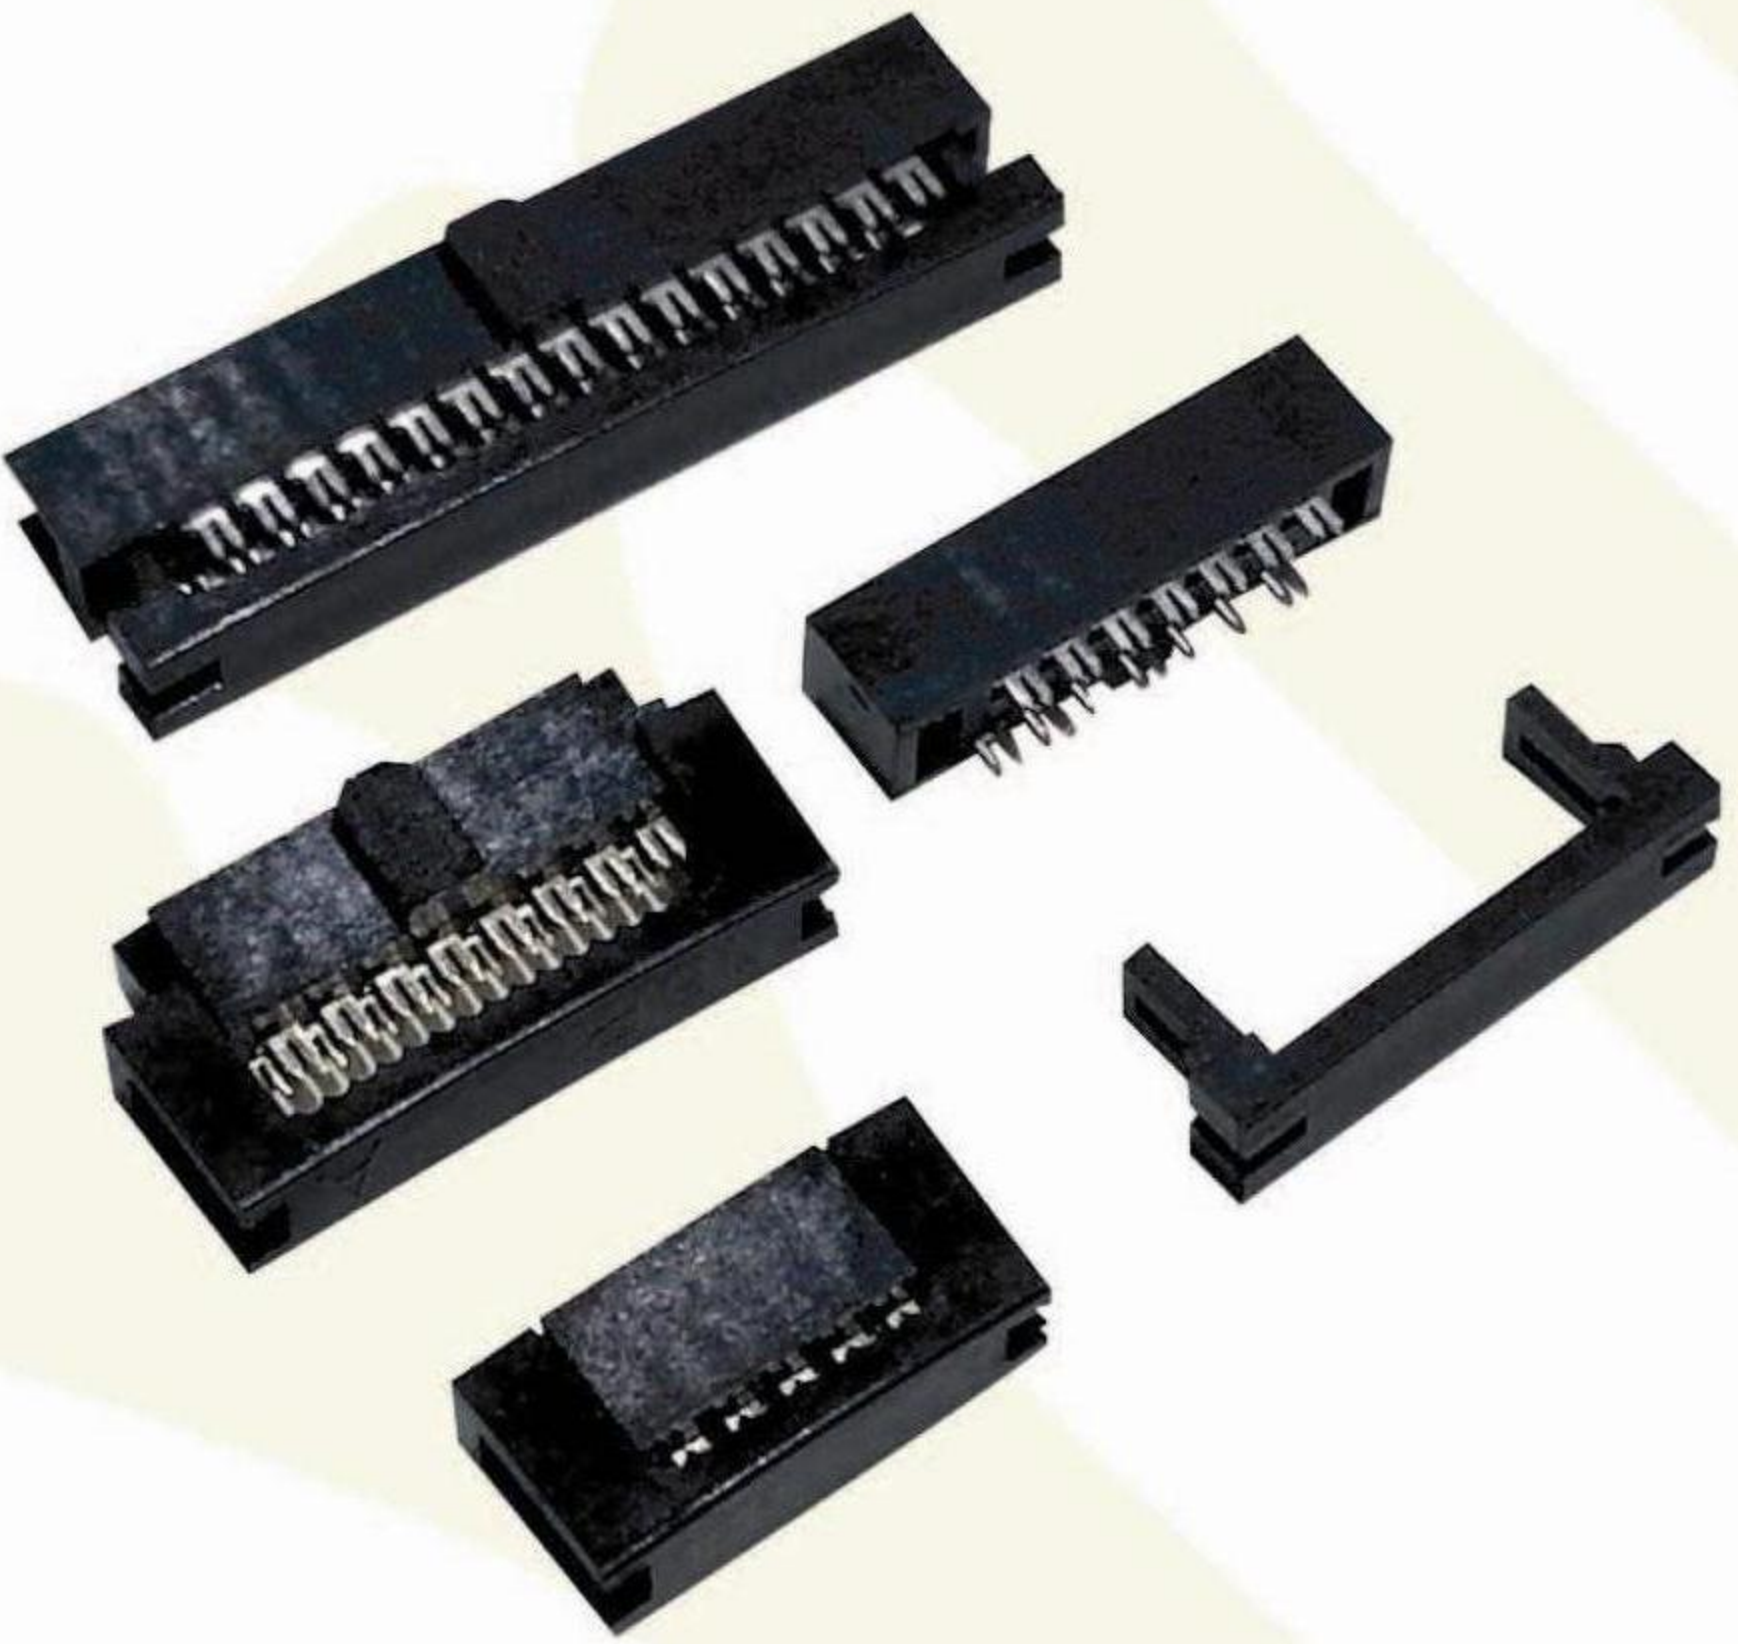

303A