


MINI DIN JACK DUAL PORT CONNECTOR



MATERIAL

Insulator: Thermoplastic UL94V-0

Contact: Copper Alloy

Shield: Brass

ELECTRICAL

Current Rating: 1 Amp.

Voltage Rating: 500 Vac Rms.

Operating Temperature: -40°C to 105°C

ORDER




Series 222-06-1-N-G-W-R

Pins
04: 4 Pins x2
06: 06 Pins x2

Housing Color
1: Black
9: PC99

Shell Plated
N: Nickel
T: Tin

RoHS
Springy Ground
W: With
N: Without
Contact Plated
G: Gold Flash
S: Selective Gold

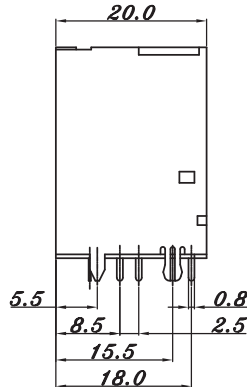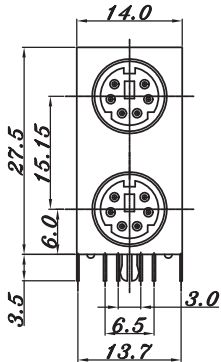

P.C.B LAYOUT
(BOTTOM VIEW)



222