


# MINI DIN JACK CONNECTOR SLIM TYPE

YIMTEX®

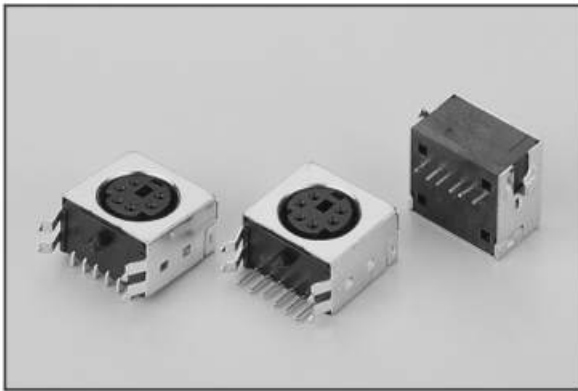

## MATERIAL

Housing: Thermoplastic, Glass Fiber UL 94V-0 Rated.

Contact : Phosphor Bronze

Shield : Brass


## SPECIFICATION

Current Rating : 100V AC 1A MAX. 12V DC 2A MAX.

Insulation Resistance: 500 Megohms minimum at 500V DC

Dielectric Strength : 500V AC/1 minute

Contact Resistance : 30 mohms maximum

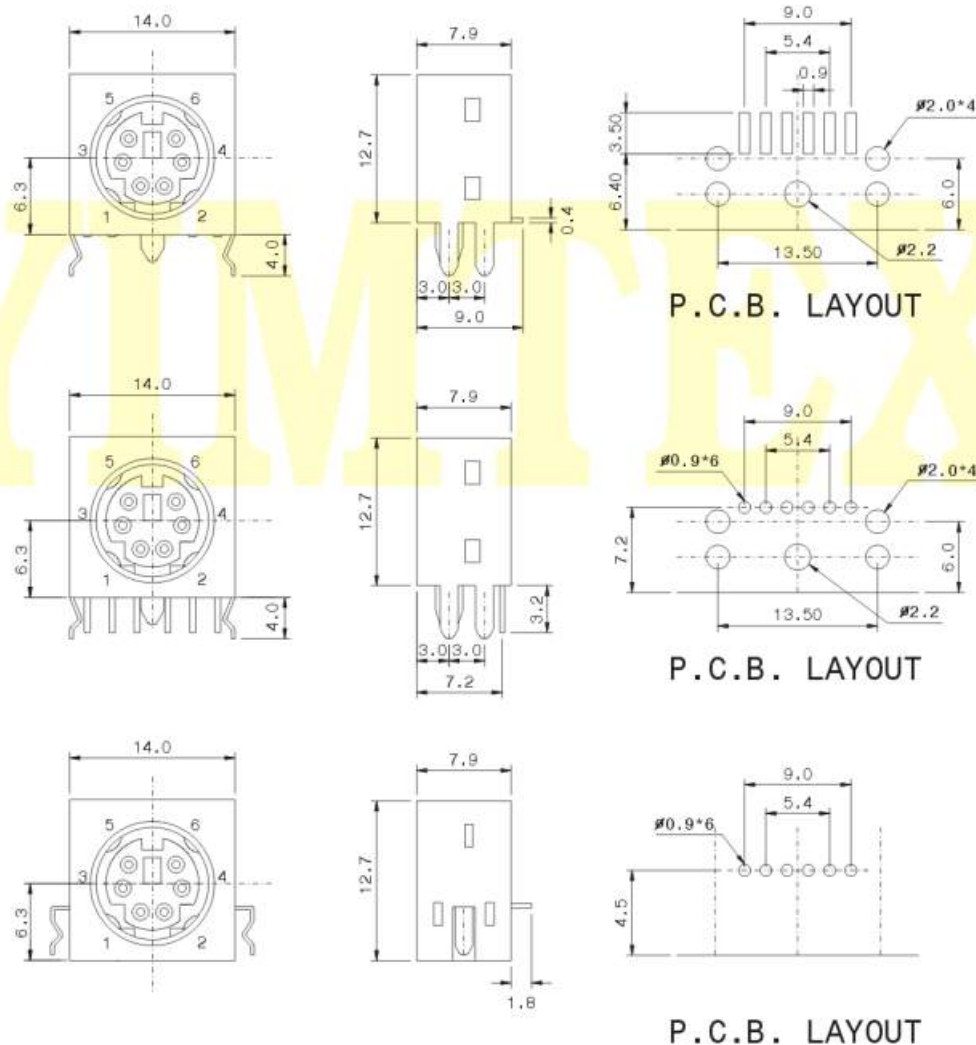

## ORDER INFORMATION:

Series No.	Pins	Housing Color	Shell Plating	Contact Plating	Type
223	04	1	T	S	A
	04	1:(Black)	T: Tin	T: Tin	A: SMD Type
	06		N: Nickel	S: Selective Gold	B: Right Angle
				G: Gold Flash	C: Straight Type