

Pitch:1.0mm Pin Headers SMD Type For PCB

**Special Options Contact Our Sales Team.*

MATERIAL

Insulator:Nylon UL94V-0 Black

Contact:Copper Alloy

SPECIFICATIONS

Current Rating:1A AC,DC

Withstanding Voltage:1000V AC/minute

Insulation Resistance:5000M Ω Min.

Temperature Range:-55°C~+105°C

ORDER






330A-2x5-A-A-G-R-xxx

Series — Pins — Pin Length
1x2-1x50
2x2-2x50
A/B/C


Angle Type —
A:SMD Vertical A Type
B:SMD Vertical B Type

RoHS
Contact Plated
T: Tin
S: Selective Gold
G: Gold Flash

Contact Material
A: Brass

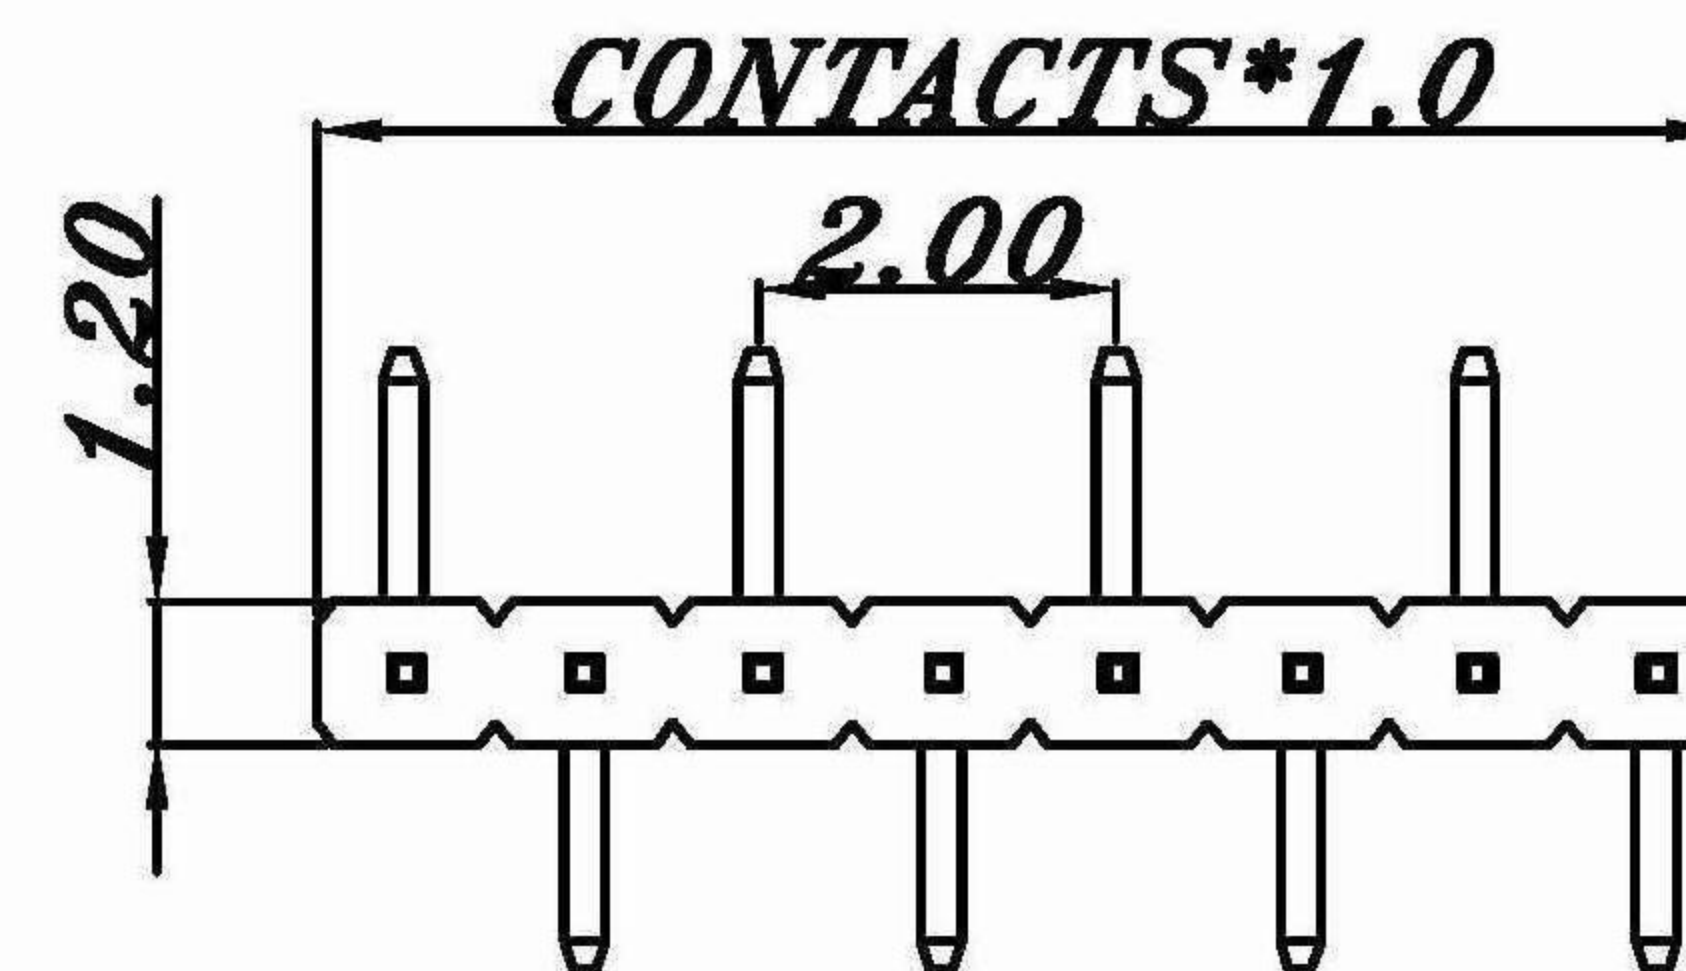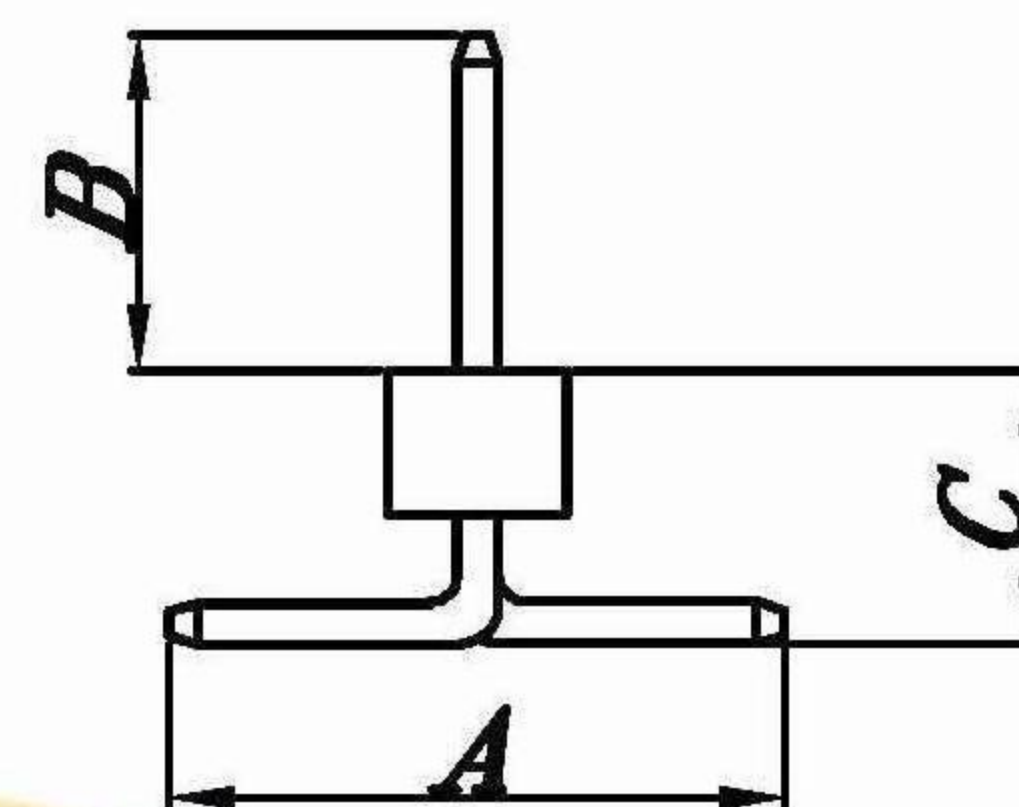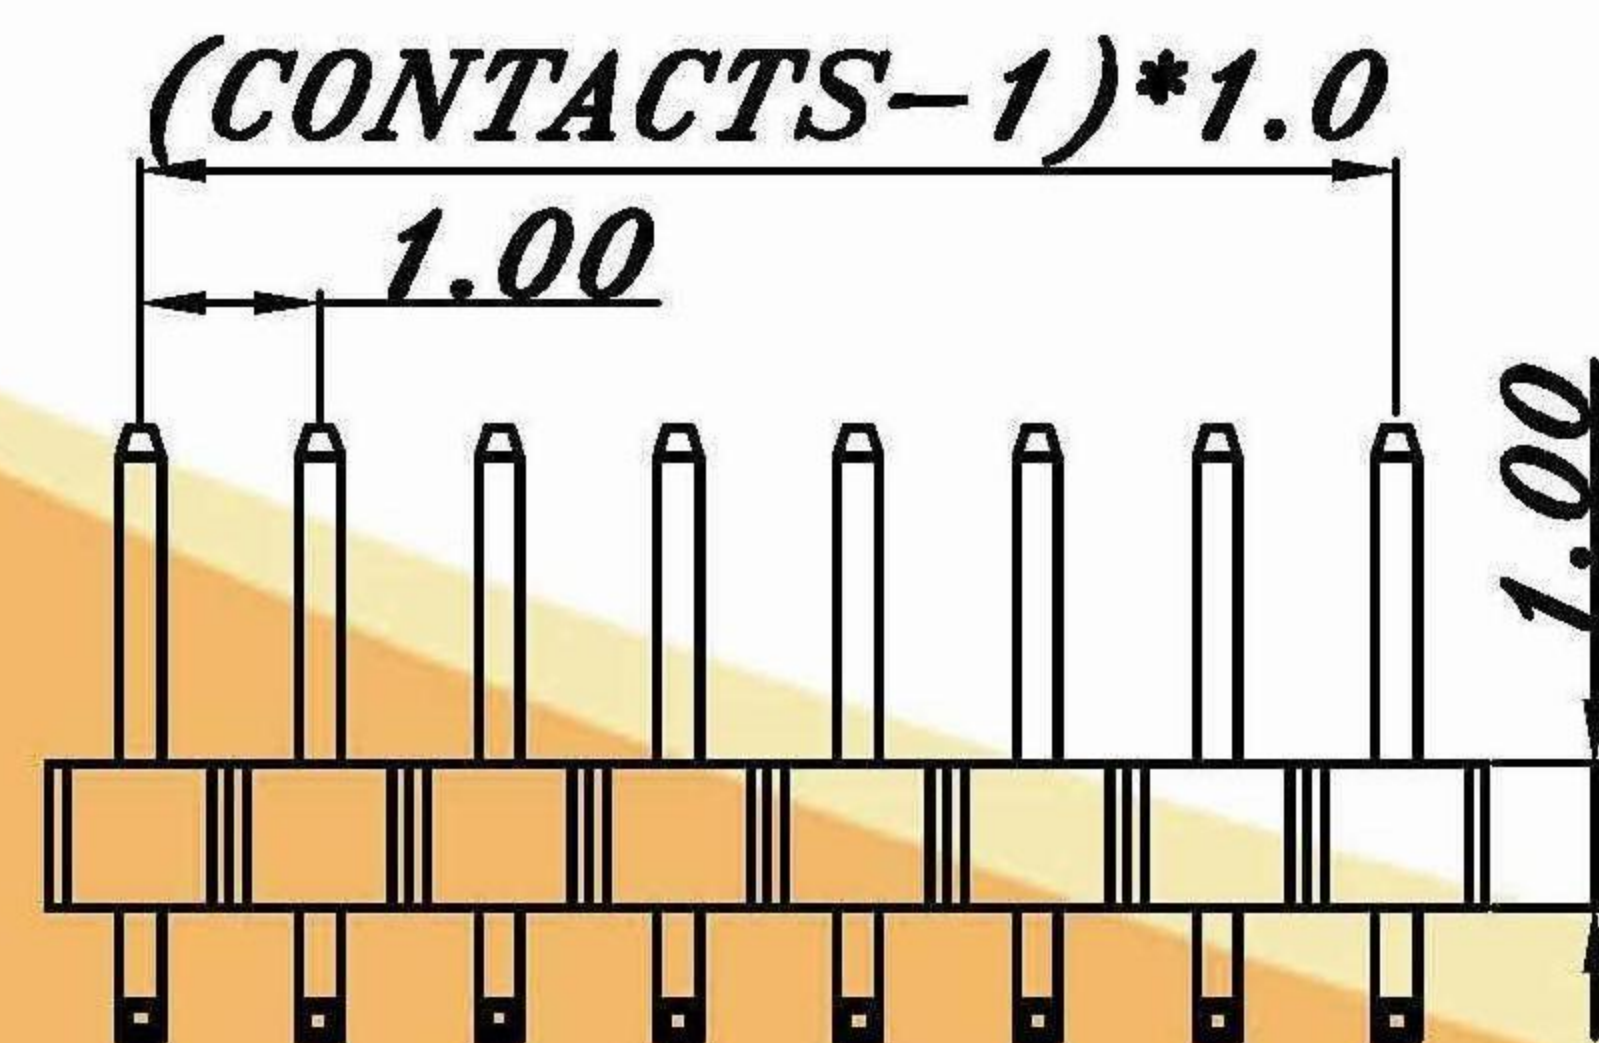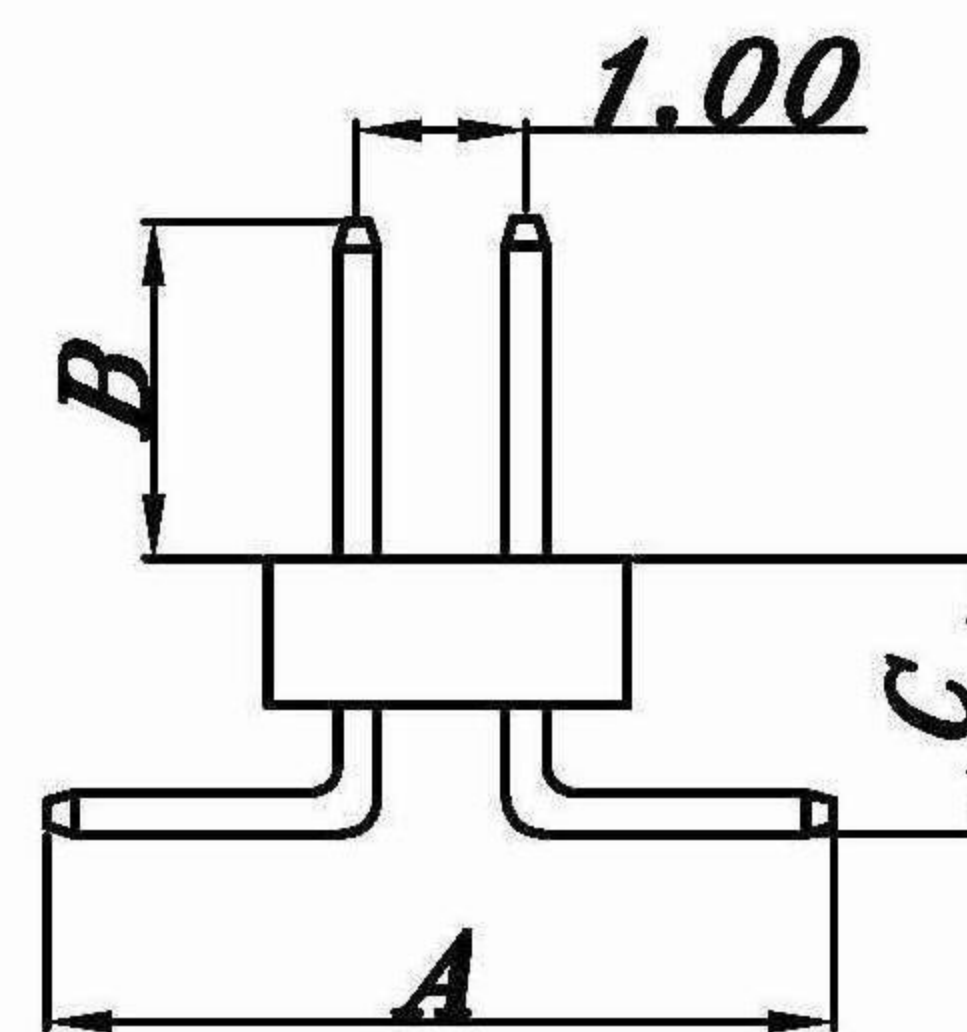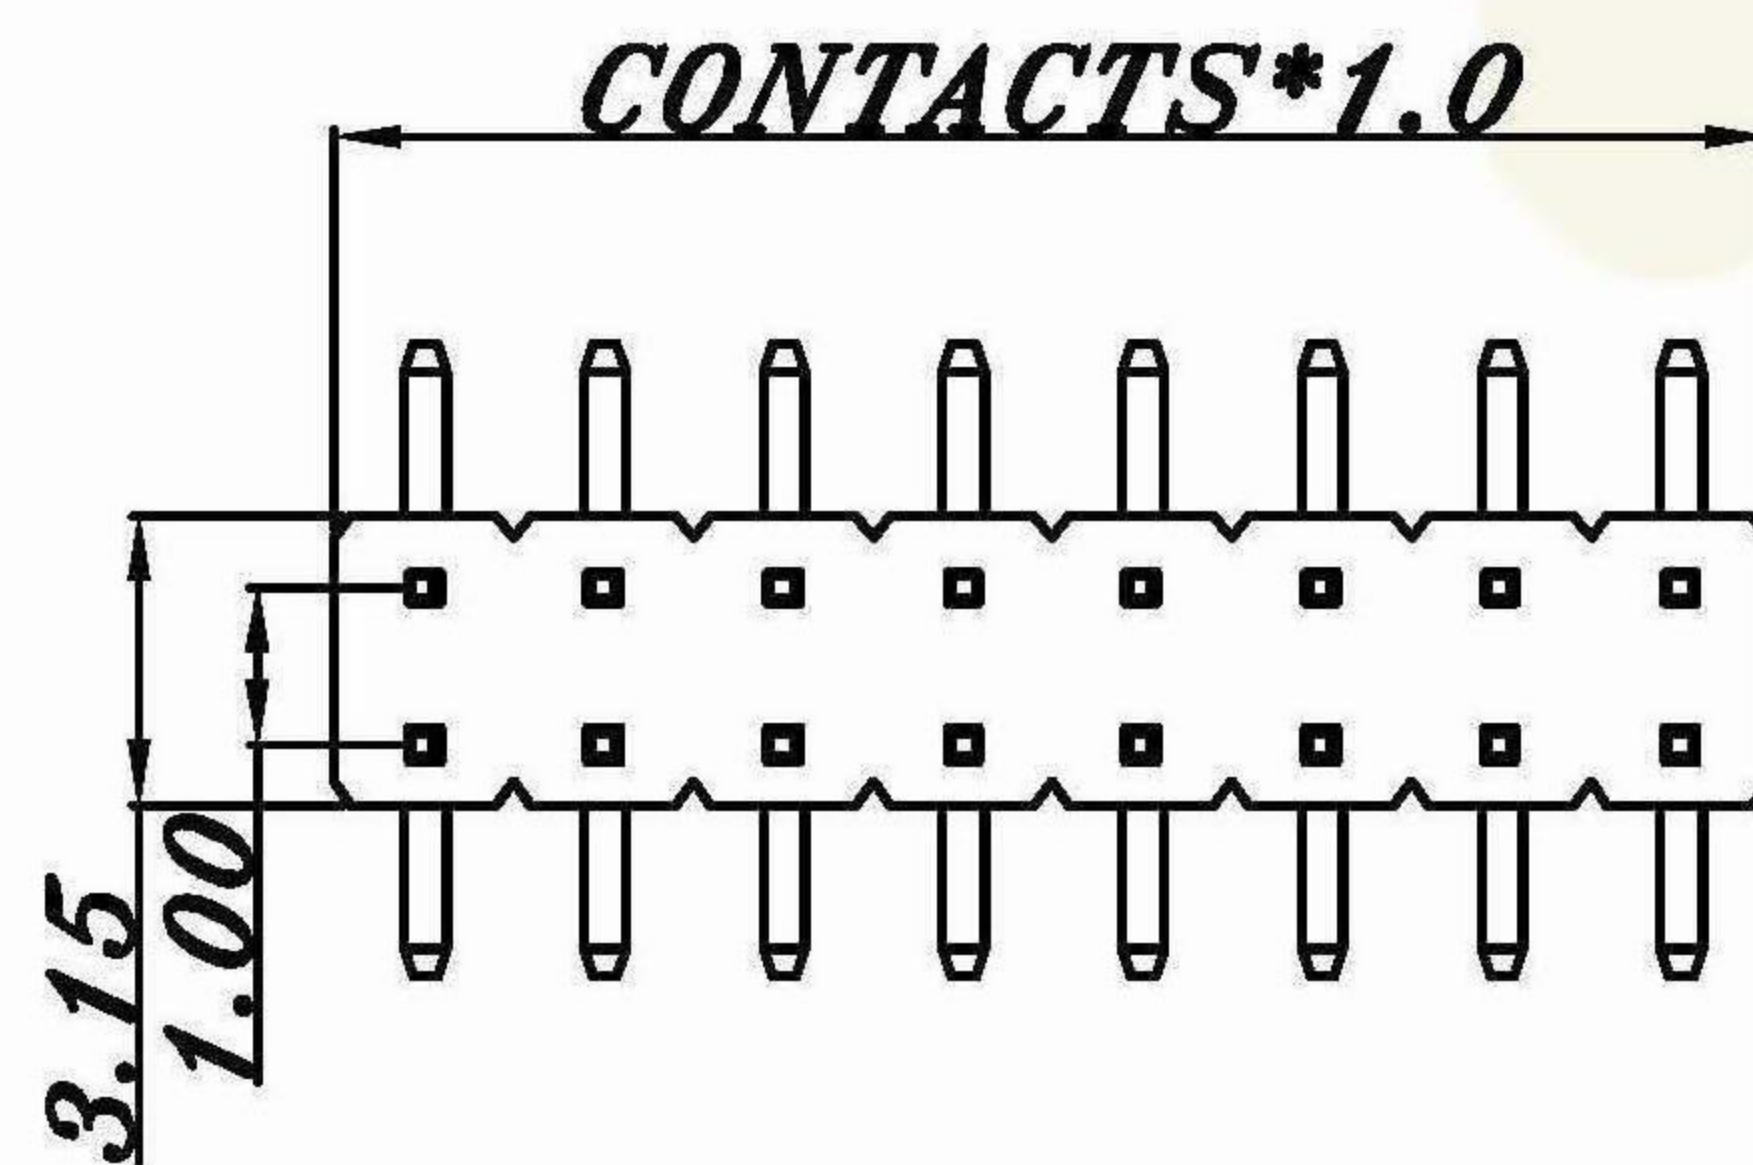

A TYPE

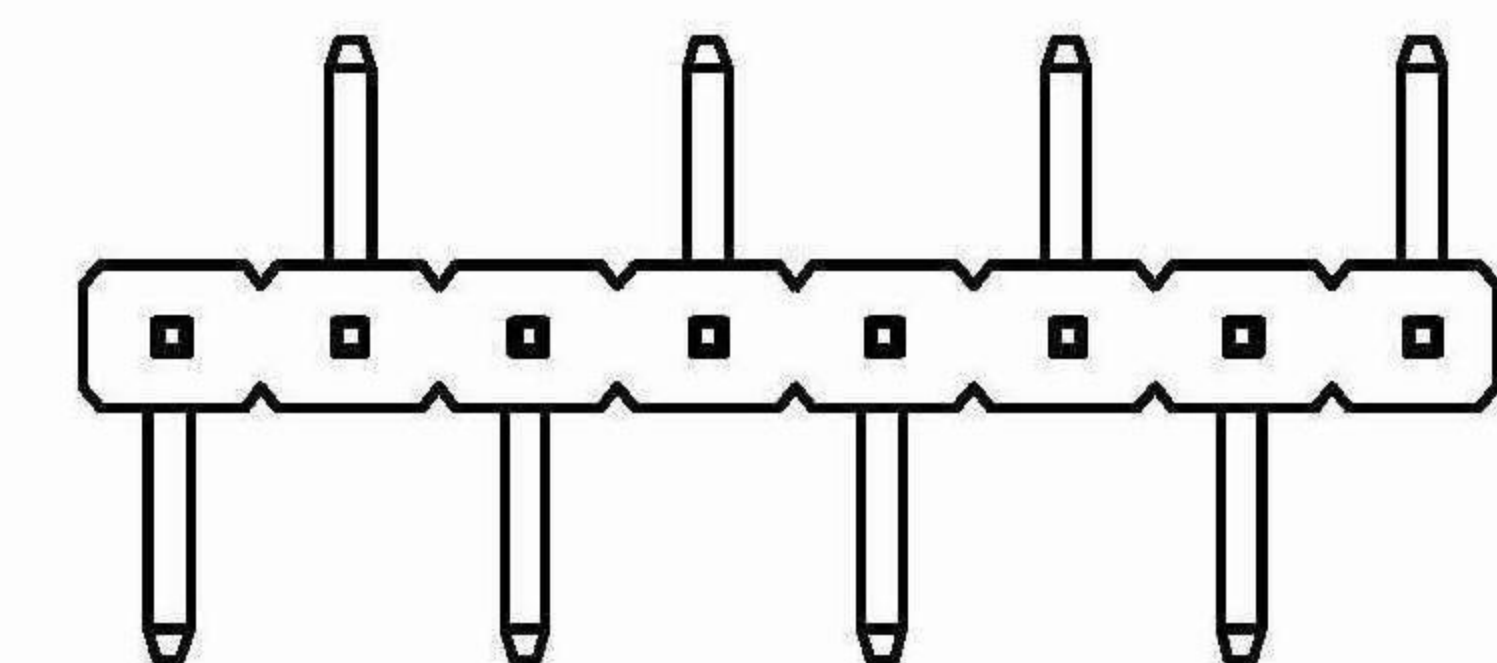

B TYPE



330A