
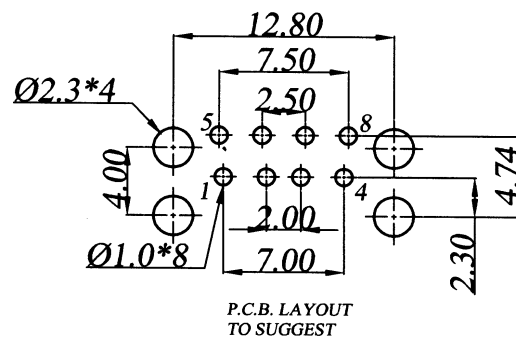
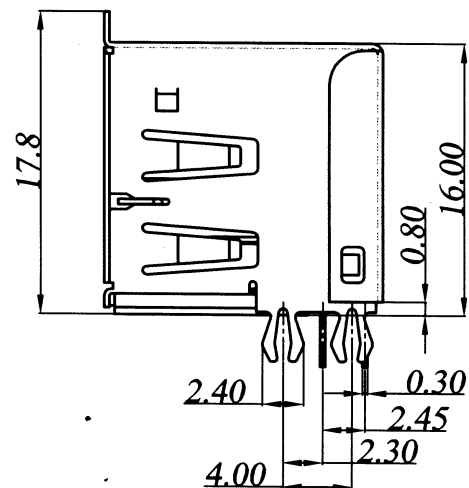


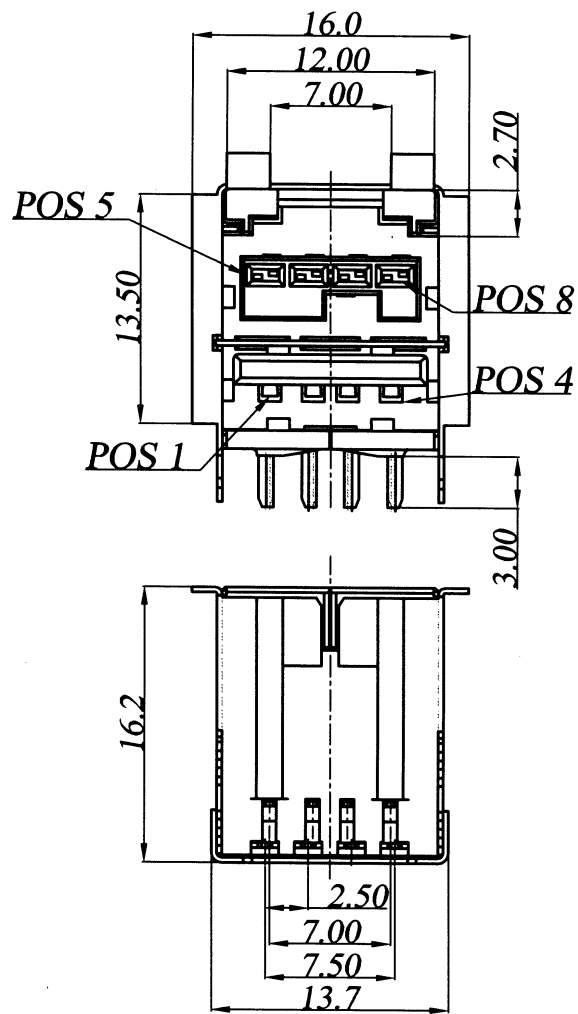

Mateial

Housing: NYLON66, UL 94V-0 rated, Color: See TABLE A

Contact: Phosphor Bronze;

Contacts Plating: Gold(30u")min. plating over Nickel(40u")min.
on contact area; Tin(100u")min./Lead plating on terminal;

Shields: Phosphor Bronze;

Shields Plating: Tin(100u")min./Lead Over Nickel(40u")min.

Electrical Specification

Rated Voltage and Current : 1.5A at 250V AC min;

Contact Resistance: 30 Milliohms max.

Insulation Resistance: 1000 megohms min At 500V DC.

Dielectric Withstanding Voltage: 500 V AC For 1 minute.

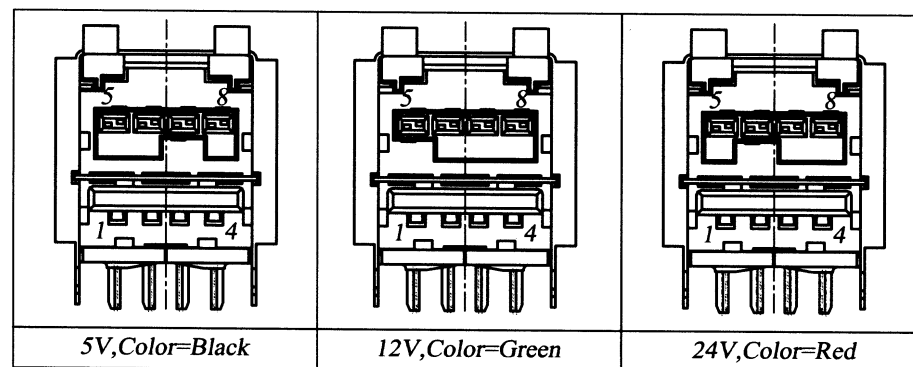


TABLE A

RoHS
2002/95/EC
YIMTEK

PROJECTION		TOLERANCE UNLESS OTHERWISE SPECIFIED			YIMTEK	
					ELECTRONIC CO., LTD.	
UNITS MM		XX ±0.5		DATE.	26/08/2010	
		.X ±0.20		REVISE.	A/0	
		.XX ±0.10		TITLE.	USB+POWER Connector	
		.XXX ±0.05		PART NO.	106-Series	
核准者 APPROVAL		審圖者 CHECKED	繪圖者 DRAWING	DWG NO.	YM-SRS-106V3241	
		SAM	Tino			

項次 NO	修改內容說明 DESCRIPTION	繪圖者 DRAWING	修改日期 EDIT DATA	版本 REV
3				
2				
1				