


RJ45 JACK MULTI-PORT PCB T/H SHIELDED/UNSHIELDED

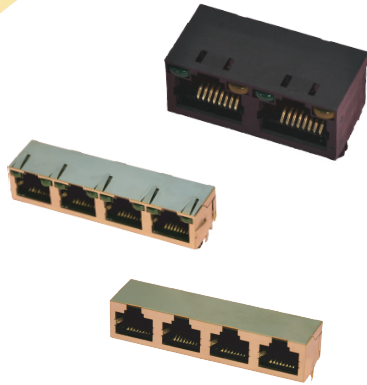

MATERIAL

Insulator: Thermoplastic UL94V-0

Contact: Phosphor Bronze

Plated: Gold Plated over Nickel in contact

Tin plated over Nickel in solder area

Solder Pad: Brass with Tin plated over Nickel

Shielded: Brass with Nickel plated

ELECTRICAL

Voltage Rating: 125 Vac Rms.

Current Rating: 1.5 Amp.




MECHANICAL:

Operating: 750 Cycles Min.




ENVIRONMENTAL:

Storage: -40°C To +85°C.




Operation: -20°C To +75°C.

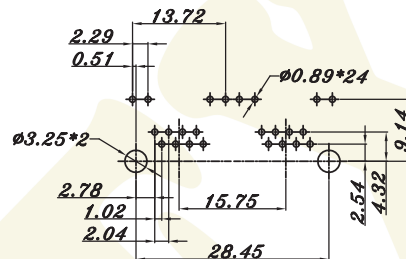

PCB LAYOUT/TOP VIEW

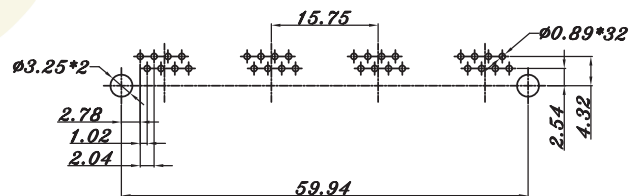

PCB LAYOUT/TOP VIEW

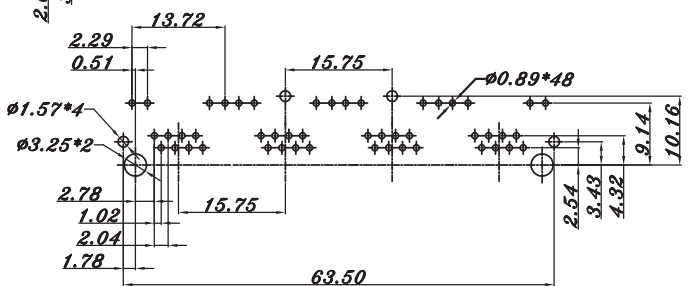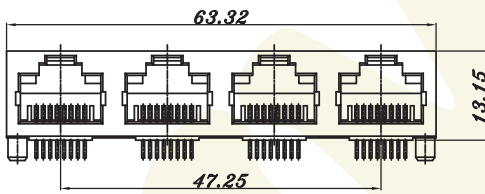

PCB LAYOUT/TOP VIEW

