

USB B TYPE VERTICAL & R/A TYPE

MATERIAL

Insulator: Thermoplastic UL94V-0

Contact: Copper Alloy

Shell: Brass

ELECTRICAL

Current Rating: 1.5Amp.

Voltage Rating: 750 Vac Rms.

Operating Temperature: -55°C to 105°C

ORDER

Series 102-04-D-2-N-S-R RoHS





Pins 04

D: Vertical
R: R/A

Housing Color
1: Black (PBT)
2: White (PBT)

Contact Plated
S: Selective Gold
S3: 30u" Selective Gold

Shell Plated
T: Tin
N: Nickel

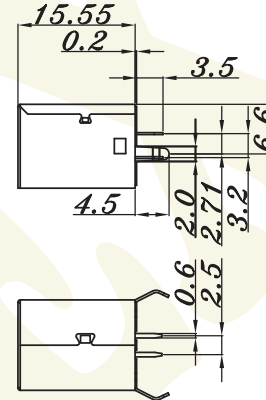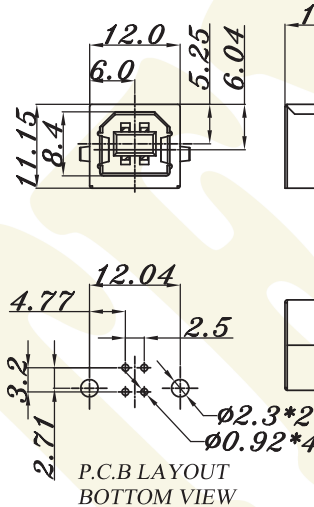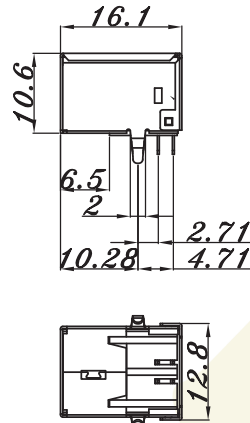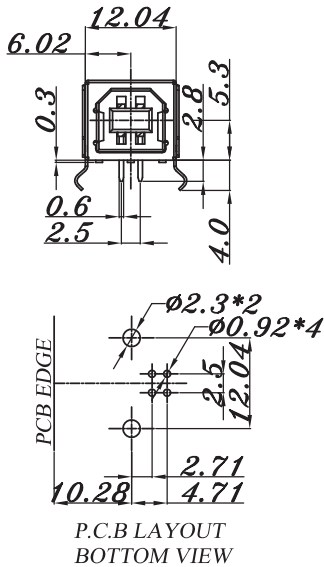

USB B SMD VERTICAL & R/A TYPE

MATERIAL

Insulator: Thermoplastic UL94V-0

Contact: Copper Alloy

Shell: Brass

ELECTRICAL

Current Rating: 1.5Amp.

Voltage Rating: 750 Vac Rms.

Operating Temperature: -55°C to 105°C

ORDER

Series 102-04-M-2-N-S-R RoHS

Pins 04

V: SMD<Vertical>
M: SMD<R/A>

Housing Color
1: Black (PBT)
2: White (PBT)

Contact Plated
S: Selective Gold

Shell Plated
T: Tin
N: Nickel

