
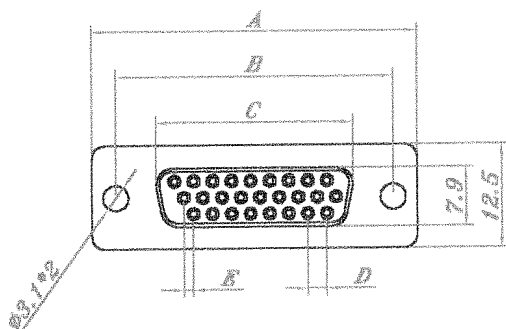



FEMALE

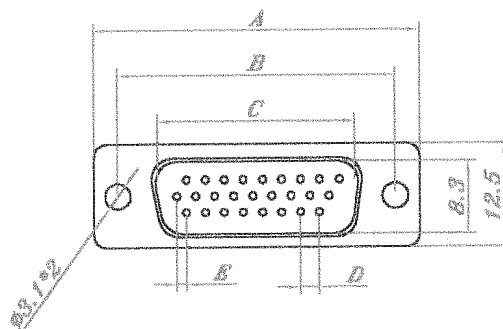

MALE

MATERIAL

INSULATOR:PBT+30%GLASS FIBER(UL94V-0)

CONTACT:PHOSPHOR BRONZE OR BRASS

(STANDARD IS BRASS)

CONTACT PLATED:GOLD OVER NICKEL

SHELL:STEEL,ZINC PLATED OR TIN PLATED

SPECIFICATION

CURRENT RATE:5AMPS

INSULATOR RESISTANCE:1000MΩ MIN.AT 500V

DC

DIELECTRIC STRENGTH:500V PER MINUTE

OPERATION TEMPERATURE:-55°C TO +105°C

CONTACT RESISTANCE:13MΩ MAX

POSITION	A	B	C	D	E	F
15F	30.8	25.00	16.30	2.29	1.14	19.2
26F	39.2	33.30	24.60	2.29	1.14	27.7
44F	53.1	47.10	38.30	2.29	1.14	41.1
62F	69.4	63.50	54.80	2.41	1.20	57.3

POSITION	A	B	C	D	E
15M	30.8	25.00	16.92	2.29	1.14
26M	39.2	33.30	25.25	2.29	1.14
44M	53.1	47.10	38.96	2.29	1.14
62M	69.4	63.50	55.42	2.41	1.20



PROJECTION



UNITS

MM

APPROVAL

TOLERANCE UNLESS
OTHERWISE SPECIFIED

XX ± 0.5

.X ± 0.25

.XX ± 0.10

.XXX ± 0.05

CHECKED

DRAWING

李于基

ALLEN

YIMTEX

穎鎂企業有限公司
YIMTEX ELECTRONIC CO., LTD.

DATE.

02/04/02

REVISE.

A/0

TITLE.

D-SUB CONNECTOR CRIMP TYPE
HIGH DENSITY

PART NO.

416-SERIES

DWG NO.

YM-416-0001