


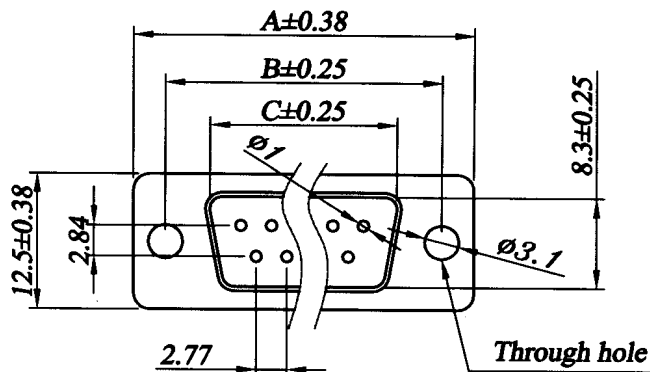


MATERIALS


Insulator :Nylon-46 (UL94V-0), Black
 Contact :Brass
 Contact Plated :Gold over Nickel
 Shell :Steel, Nickel Plated.

SPECIFICATION


Current Rating :5Amps
 Insulation Resistance :1000MΩ Min. at 500V DC
 Withstanding Voltage :500V AC/minute
 Contact Resistance :20mΩ Max.
 Temperature Range :-55°C to +105°C

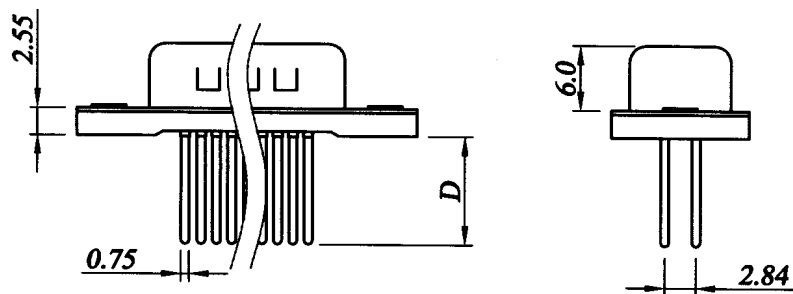

PIN	A	B	C	D
25	53.1	47.1	38.96	10
15	39.2	33.3	25.25	15

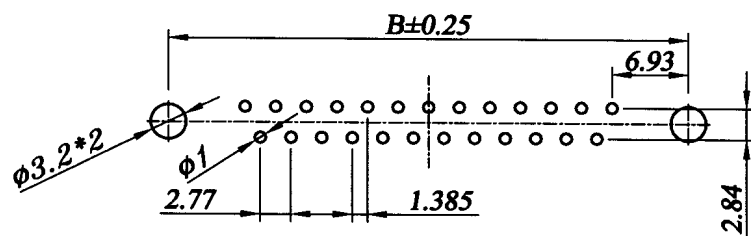

P.C. Board Layout

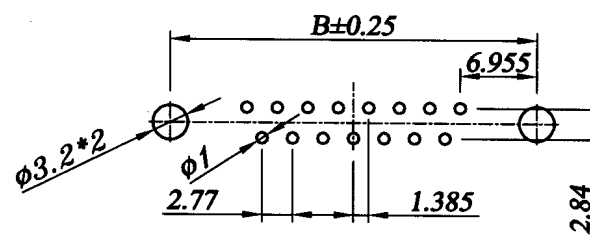

P.C. Board Layout



UNITS
 MM

核准者
 APPROVAL

李志

TOLERANCE UNLESS
 OTHERWISE SPECIFIED

XX ±0.5
 .X ±0.25
 .XX ±0.10
 .XXX ±0.05

審圖者
 CHECKED

SAM

繪圖者
 DRAWING

Allen



YIMTEK
 ELECTRONIC CO., LTD.

DATE. 26/07/2010

REVISE. A/0

TITLE. D-SUB STRAIGHT
 SLIM TYPE

PART NO. 405S-SERIES

DWG NO. YM-EXT-405S0009

項次 NO	修改內容說明 DESCRIPTION	繪圖者 DRAWING	修改日期 EDIT DATA	版本 REV
1				
2				
3				
4				
5				