

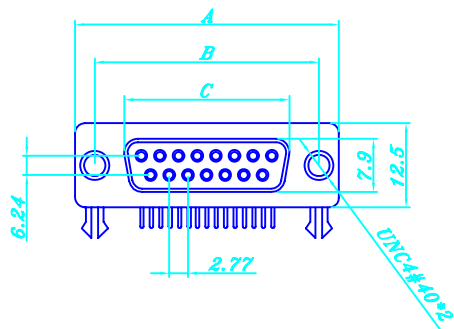
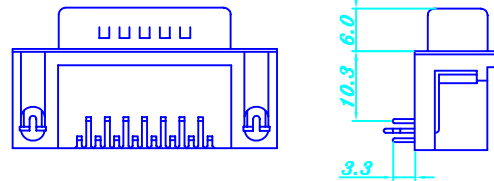
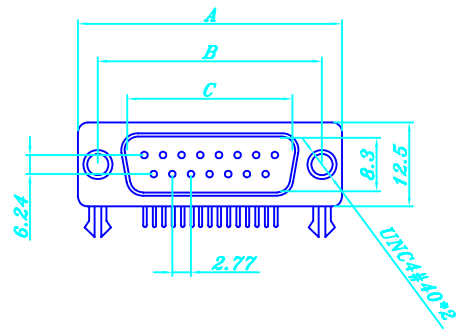




FEMALE

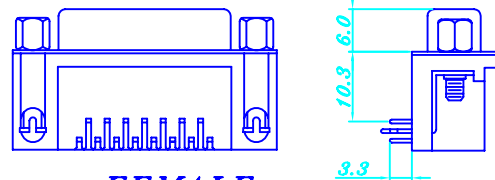

MALE

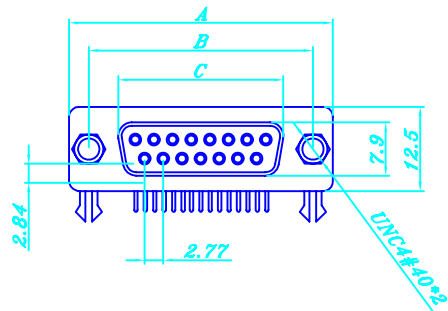

FEMALE

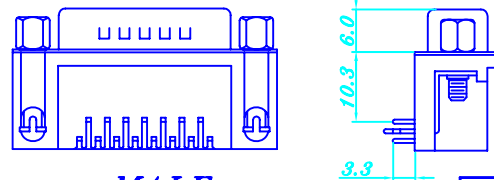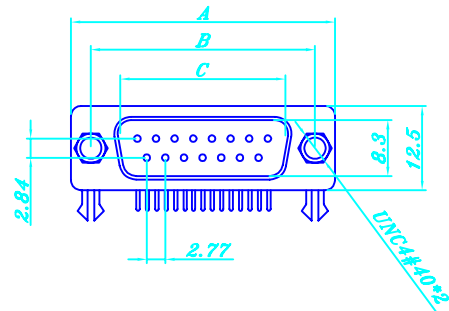

MALE

MATERIAL

INSULATOR:PBT+30%GLASS FIBER(UL94V-0)

CONTACT:PHOSPHOR BRONZE OR BRASS

(STANDARD IS BRASS)

CONTACT PALTED:GOLD OVER NICKEL

SHELL:STEEL,ZINC PLATED OR TIN PLATED

SPECIFICATION

CURRENT RATE:5AMPS

INSULATOR RESISTANCE:1000MΩ MIN.AT 500V DC

DIELECTRIC STRENGTH:1000V PER MINUTE

OPERATION TEMPERATURE:-55°C TO +105°C

POSITION	A	B	C
9M	30.80	25.00	16.92
15M	39.20	33.30	25.25
25M	53.10	47.10	38.96
37M	69.40	63.50	55.42

POSITION	A	B	C
9F	30.80	25.00	16.30
15F	39.20	33.30	24.60
25F	53.10	47.10	38.30
37F	69.40	63.50	54.80

PROJECTION	TOLERANCE UNLESS OTHERWISE SPECIFIED		YIMTEX 穎 鎂 企 業 有 限 公 司 YIMTEX ELECTRONIC CO., LTD.	
	$XX \pm 0.5$		DATE.	02/03/20
UNITS	$.X \pm 0.25$		REVISE.	A/0
MM	$.XX \pm 0.10$			
	$.XXX \pm 0.05$			
APPROVAL	CHECKED	DRAWING	TITLE.	D-SUB CONNECTOR RIGHT ANGLE TYPE FOOTPRINT 9.4mm
		ALLEN	PART NO.	407-SERIES
			DWG NO.	YM-407-0001