
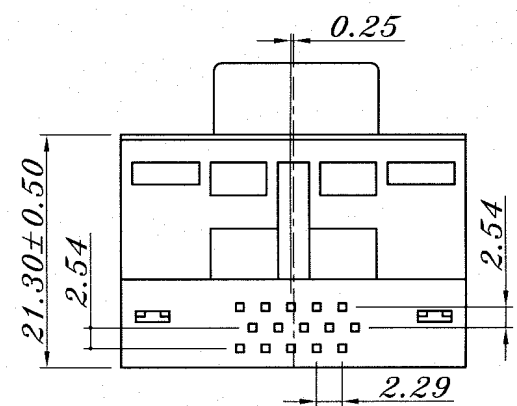
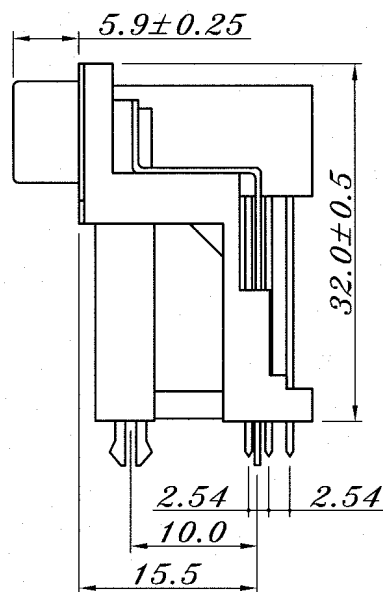


A

B

C

D

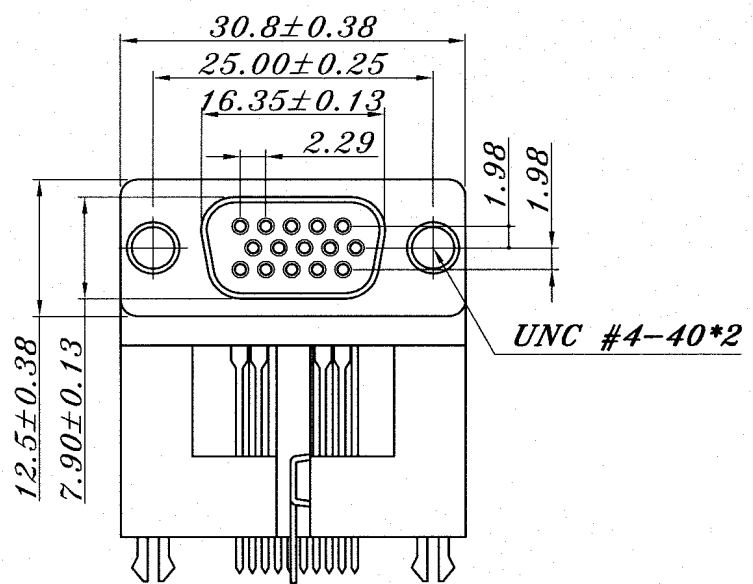


FEMALE




MATERIAL
INSULATOR MATERIAL:POLYESTER RESIN
AND GLASS FIBER REINFORCE(UL94V-0)
CONTACT MATERIAL:BRASS
CONTACT FINISH:GOLD OVER NICKEL
SOLDERTAIL FINISH:TIN-LEAD OVER NICKEL

SPECIFICATION
CURRENT RATING:5AMPS
WITHSTANDING VOLTAGE:500V AC/MINUTE
INSULATION RESISTANCE:5000MΩ MIN(AT 500V DC)
CONTACT RESISTANCE:25mΩ MAX
OPERATING TEMPERATURE:-55°C TO +105°C

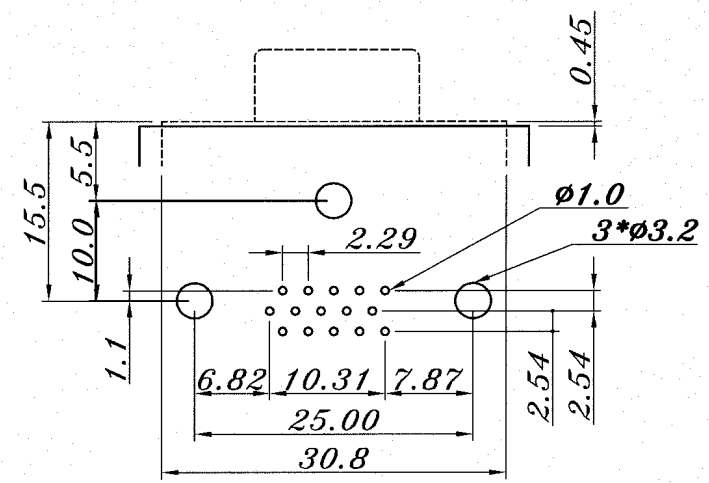

P.C. Board Layout



PROJECTION 		TOLERANCE UNLESS OTHERWISE SPECIFIED		 YIMTEK ELECTRONIC CO., LTD.	
UNITS MM		XX ±0.5		DATE.	04/08/2008
		.X ±0.25		REVISE.	A/0
		.XX ±0.10		TITLE.	D-Sub Connector H/D HIGH RISE TYPE , FEMALE
		.XXX ±0.05		PART NO.	418-SERIES
核准者 APPROVAL	審圖者 CHECKED	繪圖者 DRAWING	DWG NO.	YM-EXT-41800001	
	SAM	Allen			

項次 NO	修改內容說明 DESCRIPTION	繪圖者 DRAWING	修改日期 EDIT DATA	版次 REV
3				
2				
1				