

MATERIAL
 Insulator :PBT, Color=Black,White,Blue
 Contact :Copper Alloy
 Shell:Steel

SPECIFICATION
 Current Rating :5 Amps
 Insulator Resistance :1000MΩ Min.at 500V DC
 Withstanding Voltage :500V AC/minute
 Operating Temperature:-40°C to +150°C

ORDER INFORMATION

Series **401 09 P 3 N E N A A R** RoHS

09
15
25
37
50

P:Plug
S:Socket



COLOR
1.Black
2.White
2.Blue

SHELL PLATED
T: Tin
N: Nickel
K: under Nickel after Tin


Contact Plated
T: Tin
S: Selective Gold
S1: 5u" Selective Gold
S2: 15u" Selective Gold
S3: 30u" Selective Gold
G: Gold
G1: 5u" Gold Plated
G2: 15u" Gold Plated
G3: 30u" Gold Plated

MOUNTING METHOD
A: Through Hole
B: Hex Screw+Hex Nut
C: 3.8mm Open Hex Rivet
D: 5.8mm Open Hex Rivet
E: 4.8mm Close Hex Rivet
F: 5.8mm Close Hex Rivet

ACCESSORIES
N: None
A: Front Rivet
B: Front Rivet ADD Screw
C: Front Rivet FIX Screw
D: Rear Rivet
E: Rear Rivet ADD Screw
F: Rear Rivet FIX Screw

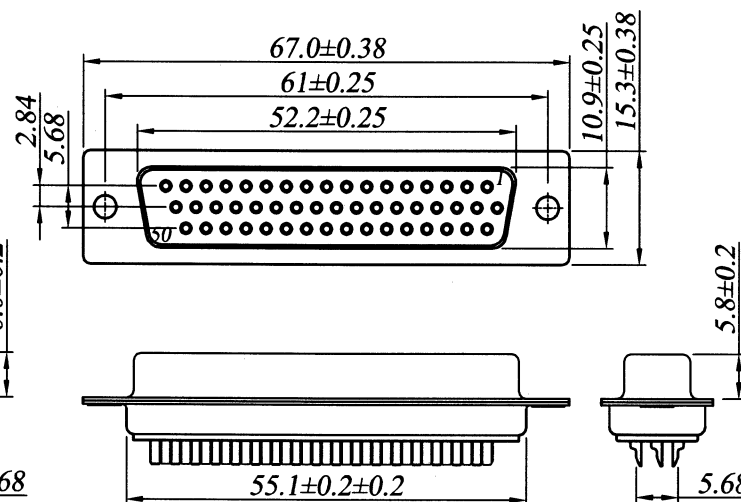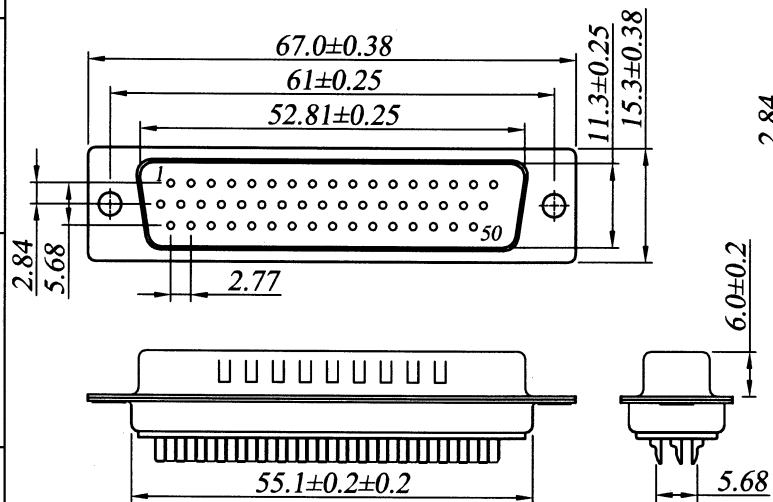


Mounting Style

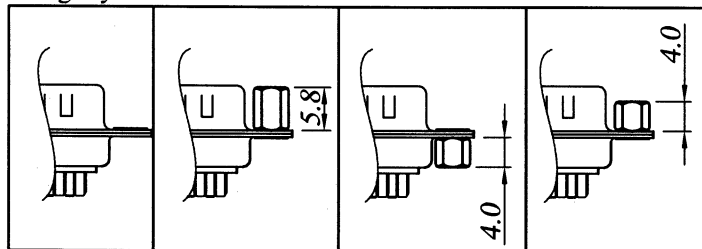

50pin

RoHS
2002/95/EC
YIMTEK

PROJECTION



UNITS

MM

核准者
APPROVAL

TOLERANCE UNLESS
OTHERWISE SPECIFIED

XX ±0.5

.X ±0.25

.XX ±0.10

.XXX ±0.05

審圖者
CHECKED

繪圖者
DRAWING

蘇純傑

SAM

Tino



YIMTEK
ELECTRONIC CO., LTD.

DATE. 28/05/2009

REVISE. A/0

TITLE. D-Sub Connector Solder Type

PART NO. 401-Series

DWG NO. YM-SRS-401PS001

項次 NO	修改內容說明 DESCRIPTION	繪圖者 DRAWING	修改日期 EDIT DATA	版次 REV
3				
2				
1				

Position	A	B	C	D
9P	30.8	25.00	16.92	19.2
15P	39.2	33.30	25.25	27.7
25P	53.1	47.10	38.96	41.1
37P	69.4	63.50	55.42	57.3

Position	A	B	C	D
9S	30.8	25.00	16.3	19.2
15S	39.2	33.30	24.6	27.7
25S	53.1	47.10	38.3	41.1
37S	69.4	63.50	54.8	57.3