

FEMALE

MALE

MATERIAL

Insulator :PBT, Color=Black,White,Blue

Contact :Copper Alloy

Shell:Steel

SPECIFICATION

Current Rating :5 Amps

Insulator Resistance :1000MΩ Min.at 500V DC

Withstanding Voltage :500V AC/minute

Operating Temperature:-40°C to +150°C

ORDER INFORMATION

Series **402 15 P 3 N G N A R**
RoHS

P:Plug
S:Socket

COLOR
1.Black
2.White
2.Blue

SHELL PLATED

T:Tin

N:Nickel

K:under Nickel after Tin

Contact Plated

T:Tin

S:Selective Gold

S1:5u" Selective Gold

S2:15u" Selective Gold

S3:30u" Selective Gold

G:Gold

G1:5u" Gold Plated

G2:15u" Gold Plated

G3:30u" Gold Plated

MOUNTING METHOD

A:Through Hole

B:Hex Screw+Hex Nut

C:3.8mm Open Hex Rivet

D:5.8mm Open Hex Rivet

E:4.8mm Close Hex Rivet

F:5.8mm Close Hex Rivet

ACCESSORIES

N:None

A:Front Rivet













B:Front Rivet ADD Screw

C:Front Rivet FIX Screw


D:Rear Rivet

E:Rear Rivet ADD Screw

F:Rear Rivet FIX Screw

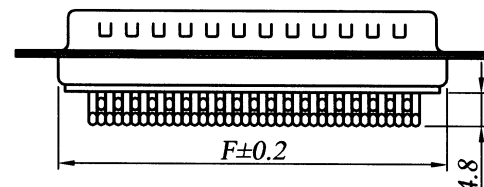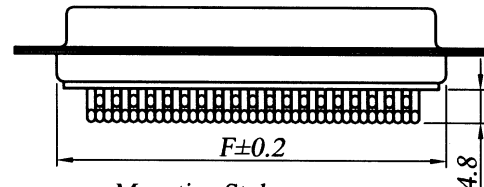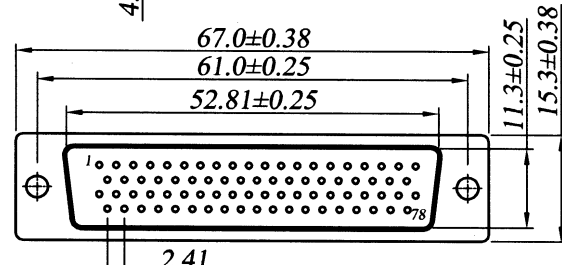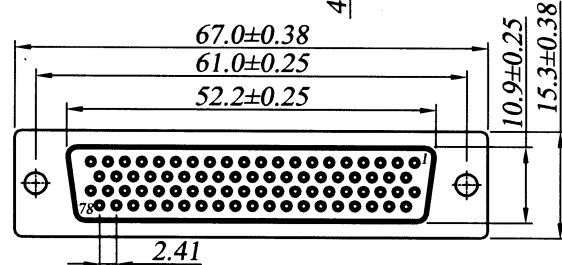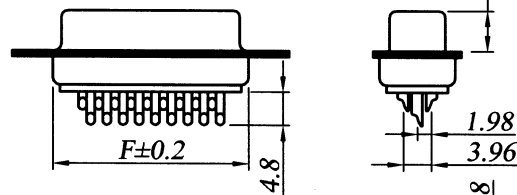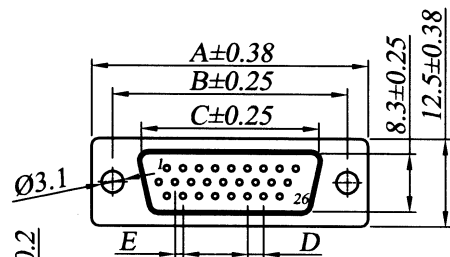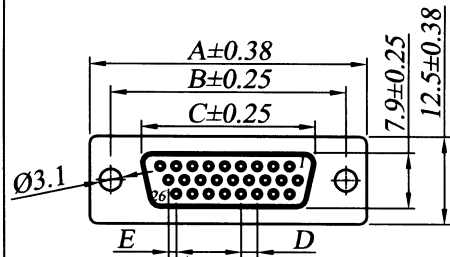


Mounting Style

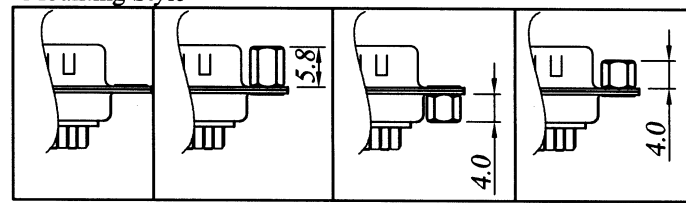

Position	A	B	C	D	E	F
15P	30.8	25.00	16.92	2.29	1.14	19.2
26P	39.2	33.30	25.25	2.29	1.14	27.7
44P	53.1	47.10	38.96	2.29	1.14	41.1
62P	69.4	63.50	55.42	2.41	1.20	57.3

Position	A	B	C	D	E	F
15S	30.8	25.00	16.3	2.29	1.14	19.2
26S	39.2	33.30	24.6	2.29	1.14	27.7
44S	53.1	47.10	38.3	2.29	1.14	41.1
62S	69.4	63.50	54.8	2.41	1.20	57.3

PROJECTION



UNITS

MM

核准者

APPROVAL

蘇純傑

TOLERANCE UNLESS OTHERWISE SPECIFIED

XX ±0.5

.X ±0.25

.XX ±0.10

.XXX ±0.05

審圖者

CHECKED

SAM

繪圖者

DRAWING

Tino



YIMTEK ELECTRONIC CO., LTD.

DATE.

28/05/2009

REVISE.

A/0

TITLE.

D-Sub Connector

H/D Solder Type

PART NO.

402-Series

DWG NO.

YM-EXT-402PS001

項次 NO	修改內容說明 DESCRIPTION	繪圖者 DRAWING	修改日期 EDIT DATA	版次 REV
1				
2				
3				
4				
5				