
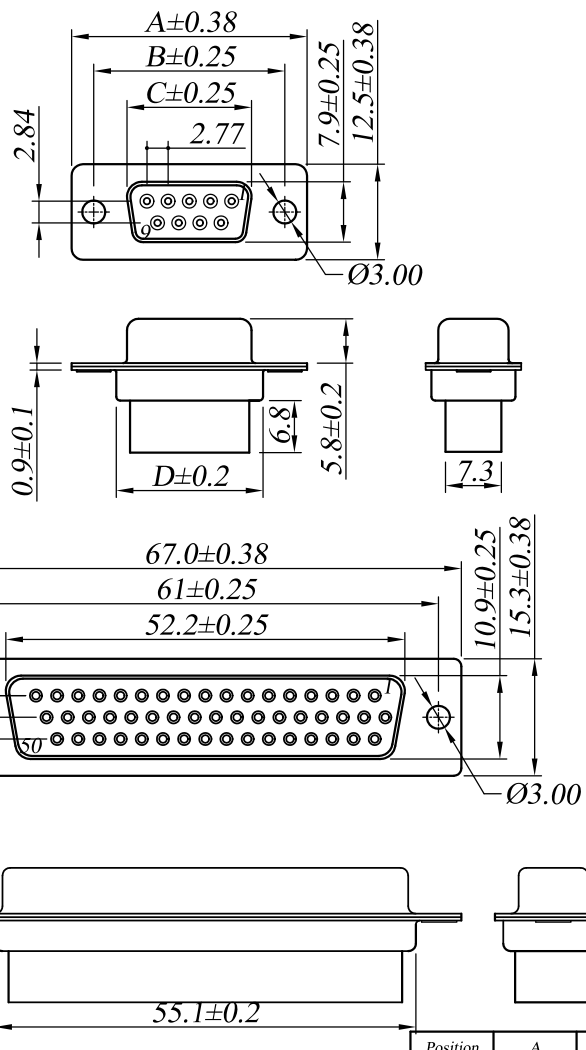


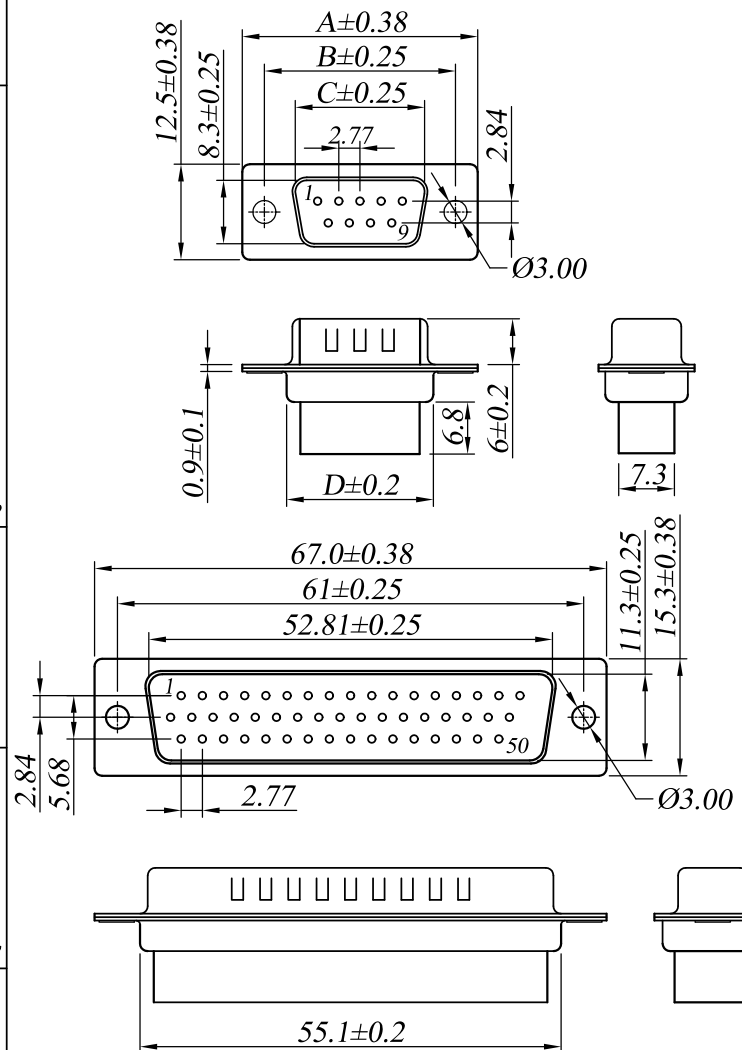

MATERIAL
 Insulator :PBT, Color=Black
 Contact :Copper Alloy
 Shell:Steel

SPECIFICATION
 Current Rating :5 Amps
 Insulator Resistance :1000MΩ Min.at 500V DC
 Contact Resistance:30mΩ Max
 Withstanding Voltage :500V AC/minute
 Operating Temperature:-40°C to +105°C

ORDER INFORMATION

Series **406 09 S 1 T N A R** RoHS

09 15 25 37 50
 P:Plug
 S:Socket


COLOR
 1.Black

SHELL PLATED
 T:Tin
 N:Nickel
 K:under Nickel after Tin

ACCESSORIES
 N:None
 A:Front Rivet
 B:Front Rivet ADD Screw
 C:Front Rivet FIX Screw
 D:Rear Rivet
 E:Rear Rivet ADD Screw
 F:Rear Rivet FIX Screw

MOUNTING METHOD
 A:Through Hole
 B:Hex Screw+Hex Nut
 C:4.0mm Open Hex Rivet
 D:5.8mm Open Hex Rivet
 E:4.0mm Close Hex Rivet
 F:5.8mm Close Hex Rivet

Mounting Style

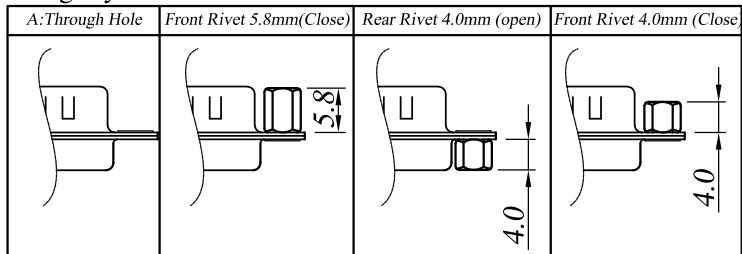


50pin



Position	A	B	C	D
9P	30.8	25.00	16.92	19.2
15P	39.2	33.30	25.25	27.7
25P	53.1	47.10	38.96	41.1
37P	69.4	63.50	55.42	57.3

Position	A	B	C	D
9S	30.8	25.00	16.3	19.2
15S	39.2	33.30	24.6	27.7
25S	53.1	47.10	38.3	41.1
37S	69.4	63.50	54.8	57.3

PROJECTION 	TOLERANCE UNLESS OTHERWISE SPECIFIED		 YIMTEK ELECTRONIC CO., LTD.		
				DATE.	28/05/2009
UNITS MM	.XX ±0.5		REVISE.	A/0	
	.X ±0.25		TITLE.	D-Sub Connector Crimp Type	
	.XX ±0.10		PART NO.	406-Series	
核准者 APPROVAL	審圖者 CHECKED	繪圖者 DRAWING	DWG NO.	YM-SRS-406PS001	
	SAM	Tino			

項次 NO	修改內容說明 DESCRIPTION	繪圖者 DRAWING	修改日期 EDIT DATE	版次 REV
3				
2				
1				