



A
B
C
D

A
B
C
D

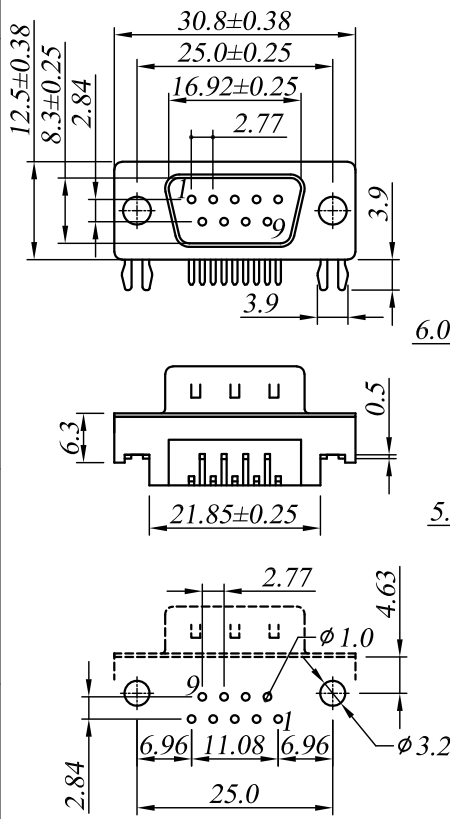

P.C.B LAYOUT TO SUGGEST

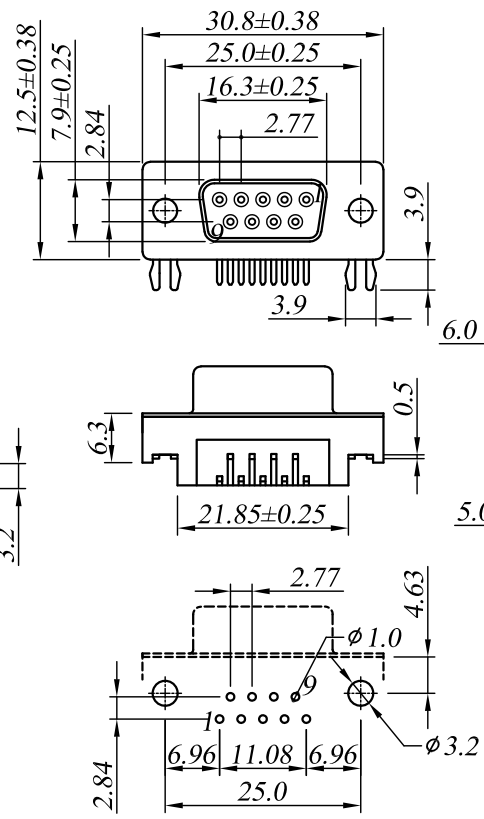

P.C.B LAYOUT TO SUGGEST

MATERIAL
Insulator:PBT
Contact:Copper Alloy
Shell:Steel
SPECIFICATION
Current Rating:5 Amps
Insulator Resistance:1000MΩ Min.at 500V DC
Withstanding Voltage:500V AC/minute
Operating Temperature:-55°C to +105°C

ORDER INFORMATION

417 09P 1 N S N E R
Series 09P 09S
15S H/D(Socket only)
25S(Socket only)
COLOR
1:Black
3:Blue
9:PC99-Green(for 9pin)
PC99-Blue(for 15pin)
PC99-Purple(for 25pin)
SHELL PLATED
T:Tin
N:Nickel
Z:Zinc
Contact Plated
T:Tin
S:Selective Gold
S1:5u" Selective Gold
S2:15u" Selective Gold
S3:30u" Selective Gold
G:Gold
G1:5u" Gold Plated
G2:15u" Gold Plated
G3:30u" Gold Plated
RoHS
MOUNTING METHOD
C:Rivet W/Boardlock(Z-Shape)Screw Fixed
D:Rivet W/Boardlock(Z-Shape)Add Screw
E:Rivet W/Boardlock(Z-Shape)
Screw Type
N:None
A:4#40(4.8*11.8)
B:M3(4.8*11.8)
C:2.6(4.8*11.8)
D:4#40(5.8*11.8)
E:M3(5.8*11.8)
F:2.6(5.8*11.8)

Mounting Style

<E>	<C>Fix Screw	<C>Fix Screw	<D>Add Screw	<D>Add Screw

額録企業
2020.08.28
發行章

RoHS 2.0
2011/65/EU
YIMTEX

PROJECTION	TOLERANCE UNLESS OTHERWISE SPECIFIED		YIMTEX ELECTRONIC CO., LTD.	
	XX	±0.5	DATE.	17/01/2018
UNITS MM	.X	±0.25	REVISE.	A/1
	.XX	±0.10	TITLE.	D-Sub Connector R/A Footprint 3.08mm
	.XXX	±0.05	PART NO.	417-Series
核准者 APPROVAL	審圖者 CHECKED	繪圖者 DRAWING	DWG NO.	YM-SRS-41700001
		Tino		

項次 NO	修改內容說明 DESCRIPTION	繪圖者 DRAWING	修改日期 EDIT DATA	版次 REV
		Tino	2018/01/17	A/1
		Tino	2009/05/28	A/0